


SPECIFICATION SHEET

JOB NAME: _____
 LOCATION: _____
 QUOTE/REF#: _____

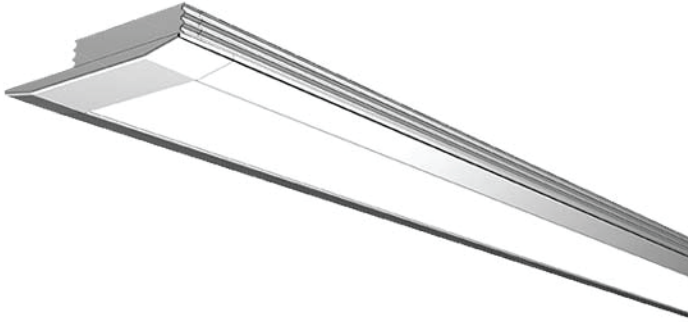

SPECIFICATIONS

| | |
|--------------------------|------------------------|
| TYPE | Recessed mount |
| AVAILABLE LENGTHS | 49.25 in and 98.5 in |
| FINISH OPTIONS | White Black Silver |
| LENS OPTIONS | Frosted |
| CHANNEL | ALP-20R |
| LENS | ALP-20R-LN |
| END CAP | ALP-20R-EC |
| MOUNTING CLIP | ALP-20R-CL |

Compatible with LED strips up to **10mm (0.40in) wide**.
 LED tape light sold separately.
 Frosted Lens diffuser included (1 with every channel)
 2 (two) end caps included with every channel.
 Custom color finishes available (powder-coating).

ORDERING CODE


| Model | Length | Lens | Light Engine | Finish |
|---------|-------------------------------|--------------|--------------|---|
| ALP-20R | 49 - 49.25 in 98 - 98.5 in | FR - Frosted | See P. 3 | WH White BK Black SI Silver CU Custom (powder-coat) |

The **ALP-20R** is a recessed, Architectural Grade LED extrusion profile designed for linear LED strips up to **10mm (0.40in)** wide. Made from high quality anodized aluminum, these extrusions provide superior thermal management for higher wattage LED strips and prolong the lifespan of the lighting system. This surface mount profile comes with a patented frosted diffuser lens for maximum lumen output and wide beam distribution. The **ALP-20R** profile helps protect LED's from dust and other undesirable elements, which can shorten the LED's life. They are also an elegant design solution for any space.

FEATURES


- Customizable
- Durable, anodized aluminum
- Protects LED systems from dust and oteher elements
- Dissipates heat from LED, prolonging its lifetime
- Suiatable for recessed installations and applications

DIMENSIONS

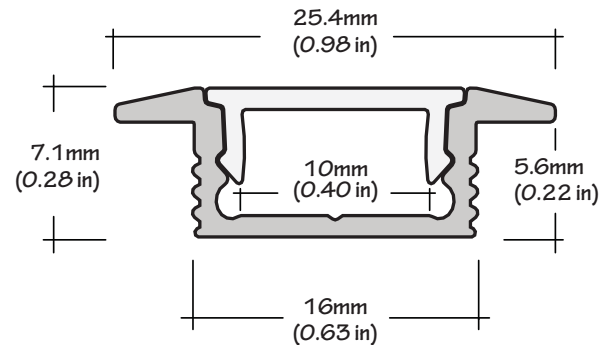

ALP-20R Recessed Mount LED Profile

ASSEMBLY

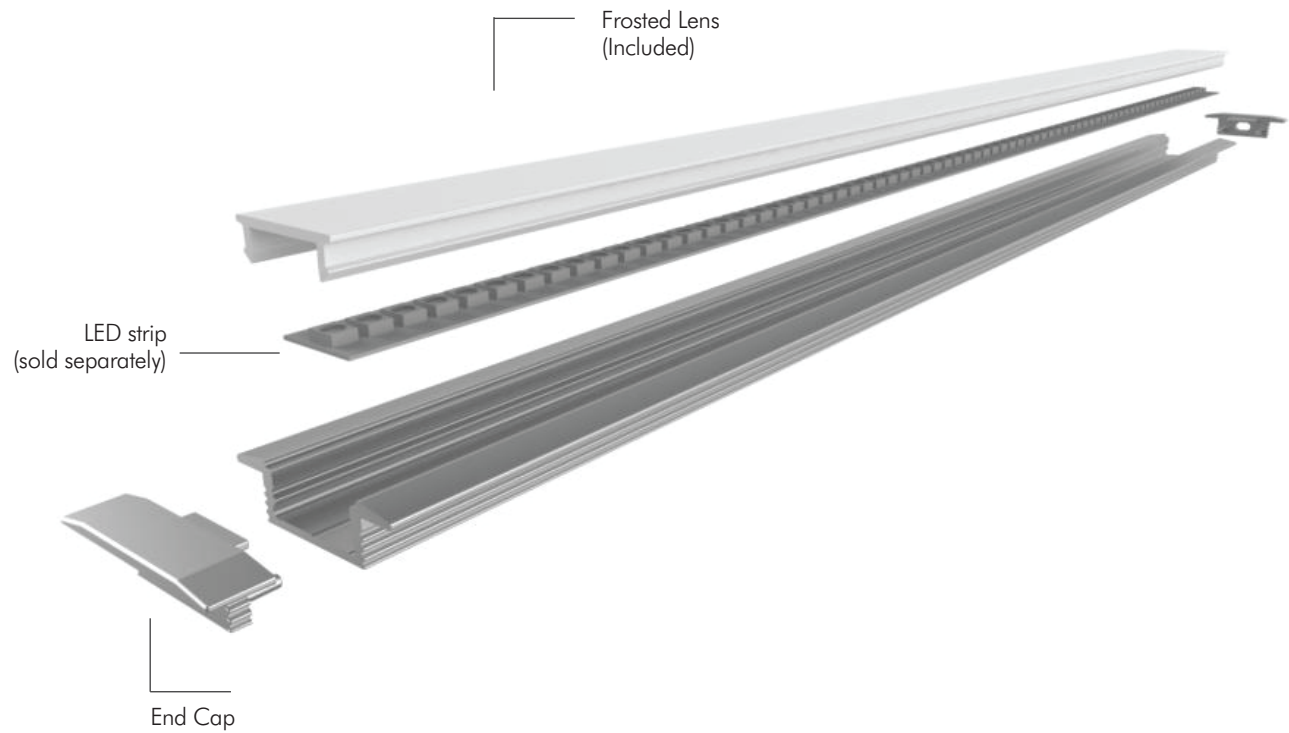

COMPATIBLE LED STRIPS

| Indoor | Outdoor | Indoor Color-changing |
|---|---------------------------------------|---|
| LSM-15 1.5W/FT, 120 Lumens | LSMW-15 1.5W/FT, 120 Lumens | LSP-20-RGB 2.2W/FT |
| LSM-25 2.2W/FT, 185 Lumens | LSMW-25 2.2W/FT, 185 Lumens | LSP-50-RGB 4.4W/FT |
| LSM-30 3.0W/FT, 250 Lumens | LSMW-30 3.0W/FT, 250 Lumens | LSP-50-RGB-DX 4.4W/FT Digital |
| LSM-35WD 3.6W/FT, Auto Warm Dim | | |
| LSM-40HF 4.0W/FT, 440 Lumens | | |
| LSM-45 4.4W/FT, 370 Lumens | | |
| LSP-50 4.4W/FT, 380 Lumens | | |
| LSM-55 5.5W/FT, 500+ Lumens | | |
| LSM-55MX 5.5W/FT, 500+ Lumens | | |