

## INSTALLATION GUIDE


---

### WARNING!

To prevent electrical shock, turn off electricity and check your local electrical code and regulations. Consult a qualified electrician before installing.

### CAUTION!

- All installations should comply with National and local electrical codes.
  - This system is intended to be installed with a Class II **12VDC LED Driver**.
  - Read all instructions carefully before starting installation.
  - Turn off power before modifying/installing the system.
  - This fixture can only be used with Core Lighting's Class II LED Drivers.
  - Maximum number of fixtures per run should not exceed power supply wattage rating or exceed 90 feet.
  - Note: After determining the layout of the system, add the wattage of each system component together to calculate the total system consumption. The component wattages are marked on the products themselves. The calculated total system consumption should be equal or less than the 12VDC Class II power supply rating that is being used.
- 

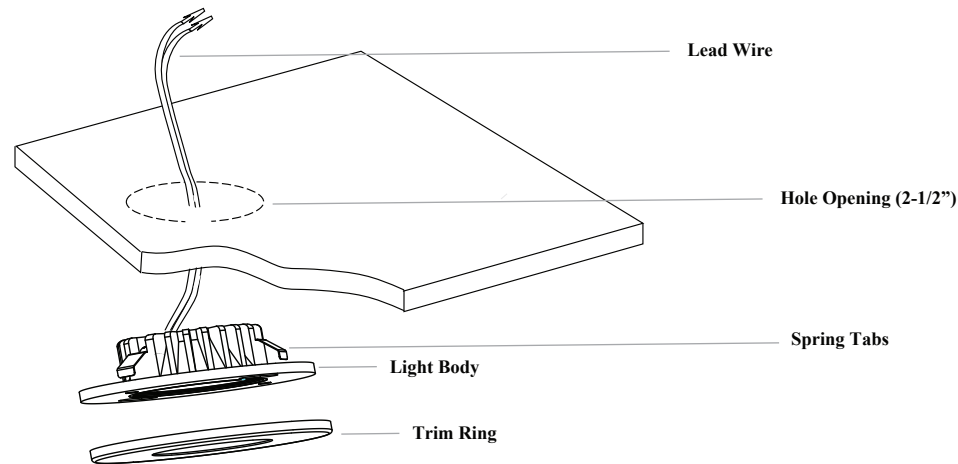

1. Determine the layout of the system and distance between LED Driver and LED Lights to use correct cable Lengths.
2. Drill 2-1/2" cutout to recess mount LED LIGHT BODY. Make sure to remove rough areas at edge and inside hole.
3. Connect lead power wires to 12V DC Driver.
4. Feed lead wires through hole and push LED into place, allowing metal spring tabs on Light Body to hold fixture in position.
5. Snap on trim ring onto Light Body.