



INSTALLATION GUIDE

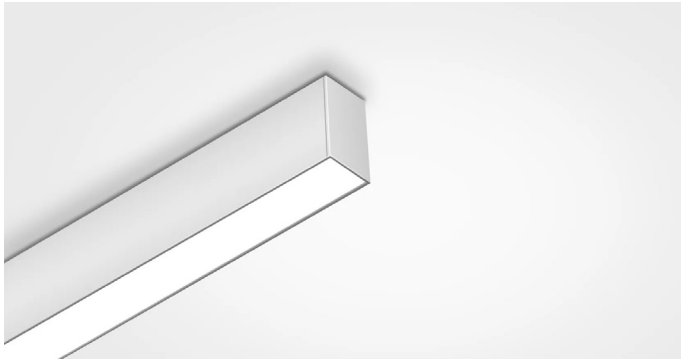


PRE-INSTALLATION

Surface Mount

Disconnect power source prior to installation.

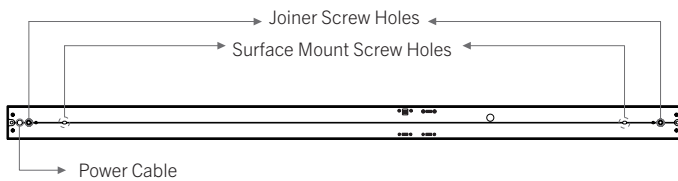

DIMENSIONS

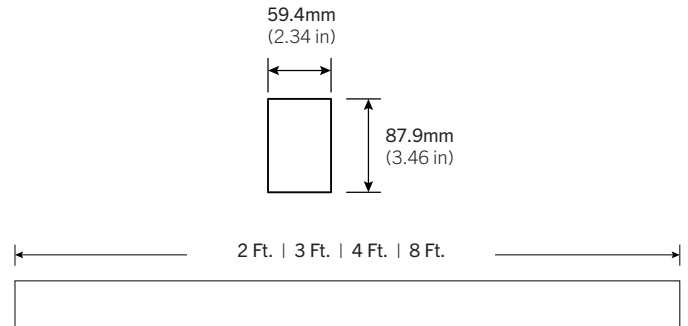

SAFETY

Read all instructions before installation.

These products may present a possible shock, serious injury, or death if improperly installed.

Do not install in wet locations.

Do not cover fixture with heat insulation gasket or similar materials.

- Product should be installed by a qualified electrician.
- Product should be installed in accordance with these instructions and current electrical codes.
- To reduce the risk of fire or overheating, all connections should be tight and secure.

INSTALLATION

STEP 1

Thread the main power cord through the Power Cable hole, located on the bottom of the fixture. Connect the wires with the corresponding colors. (Figure 1)

STEP 2

Mark your chosen surface to map out the planned installation and align the Echo 300 fixture

Drill Ø0.47" holes for mounting. (Figure 2)

* See chart for factory recommended measurements.

STEP 3



Using the provided mounting plate, cover the junction box and secure in place with appropriate screws.

Plaster over the mounting plate. (Figure 3)

STEP 4

Wire accordingly, connecting the male and female quick connectors (or corresponding AC, Dimming, and Ground wires) together.

Hide all wires inside the junction box.

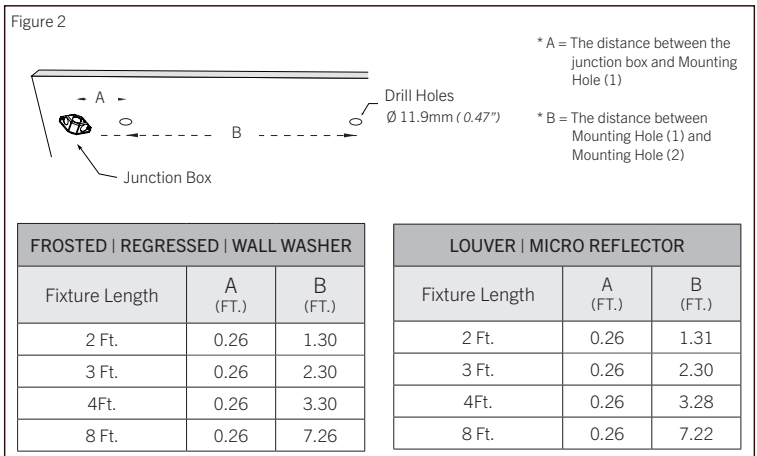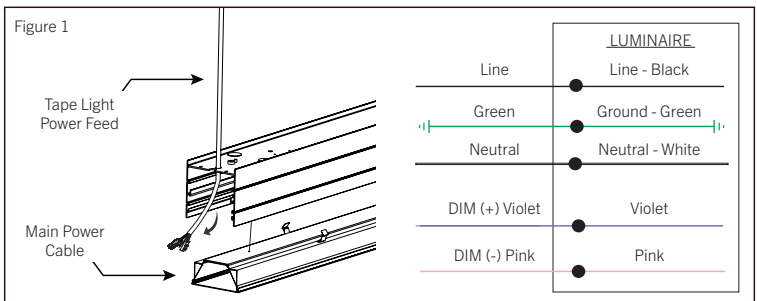

INSTALLATION

STEP 5

Using the provided butterfly drywall anchor, secure the fixture to the surface. (Figure 4A)

**If mounting onto a wooden frame or cement drywall, please use appropriate screws.*

Line Joiner

If creating a continuous run using a Straight Joiner (ECH-S300-ST), add the straight joiner to the continuing end of the fixture housing. Secure in place with the appropriate screw.

**Tight enough for a secure fit, but not tight enough to damage the fixture housing.*

Repeat steps 1-5 if installing more than one fixture. (Figure 4B)

STEP 7

Press the LED modular inside of the fixture housing.
Attach the end caps the start and end of the fixture run.
(Figure 5)

Figure 3

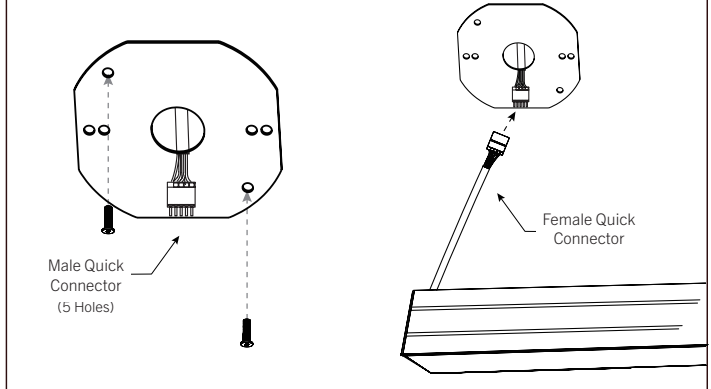


Figure 4A

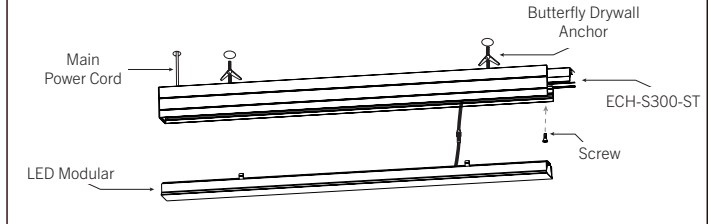


Figure 4B

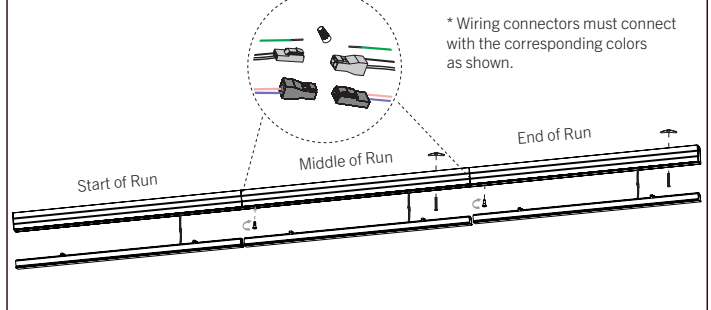


Figure 5

