

SPECIFICATION SHEET

JOB NAME: _____
 LOCATION: _____
 QUOTE/REF#: _____



Performance, versatility and a stunning visual appeal defines the **CTL-411** Track Series. This 12.5 watt luminaire delivers up to 700 lumens of light. Its integrated class 2 isolated driver built-in tho the horizontal housing provides a minimalist appearance. Available in a wide array of beam angles, track adapters and color temperatures.



FEATURES

- 700 Lm
- Die-cast powder coated aluminum
- 355° rotation, 100° Tilt
- Available in Black or White finishes
- Dry and damp locations
- Dimmable with TRIAC and ELV dimmers
- Built-in Constant current driver
- Class 2


SPECIFICATIONS

INPUT VOLTAGE	120-277VAC 50-60Hz
POWER CONSUMPTION	12.5W
LUMEN OUTPUT	700 Lm
OPTICS	Spot 19° / Flood 30° / Wide Flood 45°
ADAPTER	H Type (Halo)
COLOR TEMPERATURE	2700K / 3000K / 4000K
CRI	80+
FINISH OPTIONS	White / Black
DIMMING	TRIAC / ELV
LUMEN MAINTENANCE	50,000 Hrs.
ADJUSTABILITY	355° Rotation / 100° Tilt
DRIVER	Integrated Class 2, power factor >.90

FINISH CRI LUMEN

	80+	700
	80+	700

DIMENSIONS

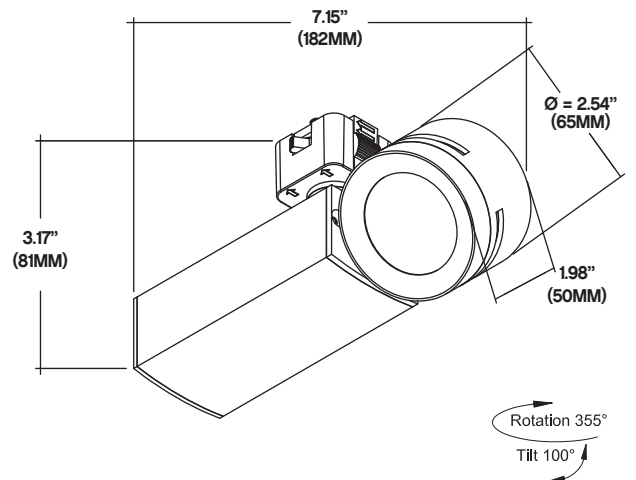

ORDERING GUIDE EX: CTL-L1-30K-BK-SP-HT-120

CTL-411	WATTAGE	COLOR TEMP	FINISH	OPTICS	ADAPTER	VOLTAGE
MODEL	L1 - 12.5W	27K - 2700K 30K - 3000K 40K - 4000K	WH - WHITE BK - BLACK	SP - 19° Spot FL - 30° Flood WF - 45° Wide	HT - H Type	120 - 120V 277 - 277V

CTL-411 700 Lumen Horizontal Track Head


PHOTOMETRICS

10W | 80CRI | 3000K

Delivered Output : 592 lm | CBCP : 2982 cd | Beam Angle : 19°

Center Beam Intensity	Beam Width	Height
2982 lx	38cm	1m
745 lx	76cm	2m
331 lx	113cm	3m
186 lx	151cm	4m
119 lx	189cm	5m

Spot 19°

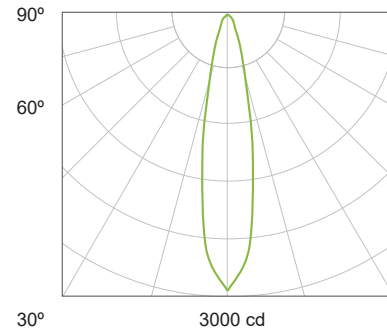


10W | 80CRI | 3000K

Delivered Output : 575 lm | CBCP : 1126 cd | Beam Angle : 30°

Center Beam Intensity	Beam Width	Height
1126 lx	68cm	1m
281 lx	136cm	2m
125 lx	203cm	3m
70 lx	271cm	4m
45 lx	339cm	5m

Flood 30°

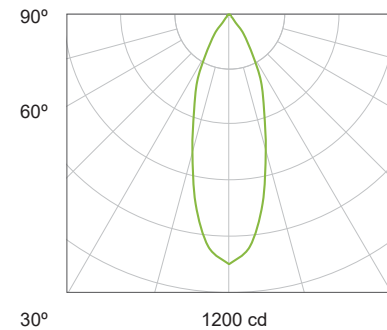

10W | 80CRI | 3000K

Delivered Output : 590 lm | CBCP : 883 cd | Beam Angle : 45°

Center Beam Intensity	Beam Width	Height
883 lx	84cm	1m
221 lx	169cm	2m
98 lx	253cm	3m
55 lx	338cm	4m
35 lx	422cm	5m

Wide Flood 45°

