

SPECIFICATION SHEET

JOB NAME: _____
LOCATION: _____
QUOTE/REF#: _____



RGB-SGU2 is a feature rich DMX lighting controller designed to provide a control solution for the most demanding projects. It comes pre loaded with RGB effects and can be programmed with the Easy Standalone software. Its attractive and intuitive glass touch pad allows control and dimming of your LED lights and fixtures.


FEATURES

- DMX standalone controller
- 3 touch sensitive buttons (on/off mode, previous, next)
- Up to 24 dynamic or static scenes (8 first visualized by LED)
- Live setting of intensity and color of a scene
- Compatible with any DMX fixture or DMX LED driver
- Ready to use out of the box (pre-loaded with 8 scenes and 42 RGB fixtures)
- Customized design for OEM, wall mountable
- USB to mini-USB cable to connect controller to PC or MAC
- MAC / PC / iOS and Android compatible

SPECIFICATIONS (RECEIVER)

INPUT POWER	5.5~12V
OUTPUT PROTOCOL	DMX512
CHANNELS	128
PROGRAMMABILITY	Windows / MAC OSX
AVAILABLE COLORS	Black / White
CONNECTIONS	USB / Euroblock / 1 dry port
MEMORY	Built-in Flash
TEMPERATURE	-0°C ~ 50°C
MOUNTING	Single 60MM wall socket
DIMENSIONS	LxWxH (86MM x 86MM x 10MM)
WEIGHT	110g
STANDARDS	EC / EMC / ROHS

DIMENSIONS

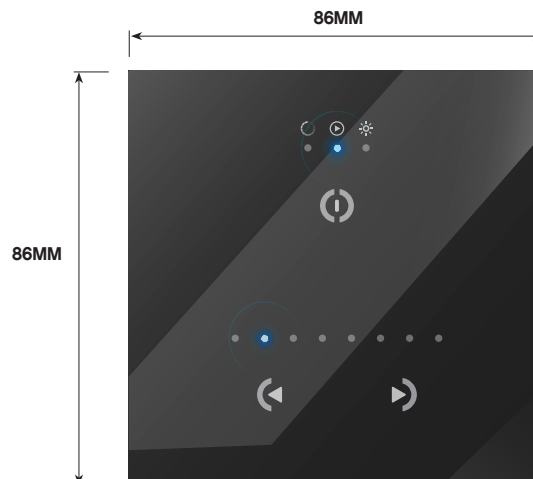

ORDERING GUIDE

EXAMPLE: RGB-SGU2-BK

RGB-SGU2	
MODEL	FINISH
	BK - BLACK WH - WHITE

RGB-SGU2 RGB DMX Wall Controller

COMPATIBLE DMX DECODERS

RGB-DMX-4C | DMX DECODER W/ DIGITAL DISPLAY

POWER INPUT	12V DC ~ 24V DC
MAX CURRENT LOAD	MAX 8A x 4CH
MAX OUTPUT POWER	384W (12V) 1152W (24V)
DIMENSIONS	LxWxH (7.04" x 1.79" x 0.73")



RGB-DMX-4C-RJ45 | 4 CHANNEL RGB DMX DECODER

POWER INPUT	12V DC ~ 24V DC
MAX CURRENT LOAD	MAX 8A x 4CH
MAX OUTPUT POWER	384W (12V) 1152W (24V)
DIMENSIONS	LxWxH (6.5" x 2.36" x 1.25")



RGB-DMX-5C-XLR | 5 CHANNEL RGB DMX DECODER

POWER INPUT	12V DC ~ 24V DC
MAX CURRENT LOAD	MAX 8A x 5CH
MAX OUTPUT POWER	5 x 96 ~ 288W
DIMENSIONS	LxWxH (6.46" x 2.87" x 1.5")
INPUT/OUTPUT PORTS	XLR 3&5 pin, RJ45, DMX



RGB-DMX-4C-WP | 4CH WATERPROOF DMX DECODER

POWER INPUT	12V DC ~ 24V DC
MAX CURRENT LOAD	MAX 5A x 4CH
MAX OUTPUT POWER	4 x (60 ~ 180W)
DIMENSIONS	LxWxH (7.11" x 2.9" x 1.5")

*IP67 WET LOCATION / WATERPROOF

