

## SPECIFICATION SHEET

JOB NAME: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 QUOTE/REF#: \_\_\_\_\_



**CSL340** series is an architectural LED lighting fixture with direct/indirect light distributions. Exceptional performance up to 148 Lumens per Watt, and a patented frosted lens to eliminate any hot spots for a uniform beam of light. Its indirect lens creates an unparalleled wide-throw batwing distribution for significantly smoother ceiling illumination. Aesthetic design elements combine the latest lighting technologies with texture and exceptional performance. Ideal for retail, office, residential or most commercial applications.


### FEATURES

- Suspended Applications
- Available Lengths: 4FT, 8FT
- Up to 1100 Lumens per FT
- 148 Lumens per Watt
- 0-10V Dimming
- Black and White Finish options
- 90+ CRI
- Aircraft Cable Suspension System

### SPECIFICATIONS


<b>TYPE</b>	Suspended
<b>AVAILABLE LENGTHS</b>	4FT / 8FT
<b>FINISH</b>	White / Black
<b>POWER CONSUMPTION</b>	11W/Ft.
<b>DIMMING</b>	0-10V
<b>INPUT VOLTAGE</b>	100V-277V
<b>COLOR TEMP</b>	35K
<b>CRI</b>	90+
<b>LUMENS</b>	Up to 1100 Lumens per FT.
<b>LENS</b>	Frosted Acrylic Lens
<b>POWER FEED</b>	10FT
<b>LIGHTING DISTRIBUTION</b>	2200 Lm UP / 4400 Lm DOWN
<b>IP RATING</b>	Dry and Damp Location

### DIMENSIONS

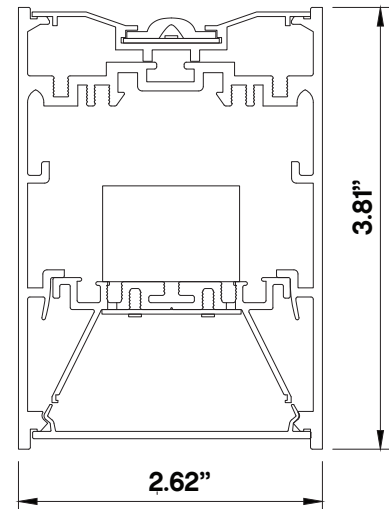

### PERFORMANCE CHART

TYPE	LUMENS PER FOOT	WATTS PER FOOT
UL1	550	3.5W
DL3	1100	7.5W



## SPECIFICATION CODE

Model	Fixture Length	Downlight	Uplight	Color Temp	Voltage	Finish
<b>CSL340</b>	<b>4 - 4Ft. 8 - 8Ft.</b>	<b>DL3 - 1100LM</b>	<b>UL1 - 550LM</b>	<b>35 - 3500K</b>	<b>UNV-120V-277V</b>	<b>WH</b> White  <b>BK</b> Black

### NOTES:

- 0-10V DIMMING
- 10FT SUSPENSION KIT INLCUDED
- SPECIAL ORDER CCT - 30K, 40K, 50K  
(Allow 4 weeks lead time)

### LIGHT OUTPUT

- UL1** 550 LUMENS / FT.
- DL3** 1100 LUMENS / FT.