

# ALP-100K-98 Surface/Corner Mount LED Profile

**CORE**  
LIGHTING

## SPECIFICATION SHEET

JOB NAME: \_\_\_\_\_  
LOCATION: \_\_\_\_\_  
QUOTE/REF#: \_\_\_\_\_



The **ALP-100K-98** is an Architectural Grade LED extrusion profile designed for corner applications and LED strips up to 15.1 mm (0.59 in) wide. Made from high quality aluminum, these extrusions provide superior thermal protection for higher wattage LED strips and prolong the overall lifetime of your lighting system. The **ALP-100K-98** is manufactured with a patented frosted diffuser for maximum lumen output and wide beam distribution.

### FEATURES

- Customizable
- Durable, anodized aluminum
- Protects LED systems from dust and other elements
- Suitable for corner installations / applications.
- Dissipates heat from LED, prolonging its lifetime

### SPECIFICATIONS

TYPE	Corner/Surface mount
AVAILABLE LENGTHS	98 in
FINISH	Anodized Silver
LENS OPTIONS	Frosted
CHANNEL	ALP-100K-98
LENS	ALP-100K-98-LN
END CAP	ALP-100K-98-EC

Compatible with LED strips up to **15.1mm (0.59in) wide.**

LED tape light sold separately.


Frosted Lens diffuser included (1 with every channel)

2 (two) end caps included with every channel.

Remote power supply sold separately.

Custom color finishes available (powder-coating).

### DIMENSIONS

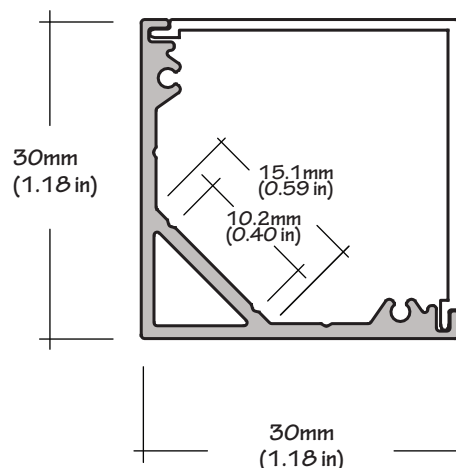

### ORDERING CODE


Model	Length	Lens	Light Engine	Finish
ALP-100K	98 - 98 in	FR - Frosted	See P. 3	SI Silver
				CU Custom (powder-coat)



# ALP-100K-98 Surface/Corner Mount LED Profile

**CORE**  
LIGHTING

## ASSEMBLY

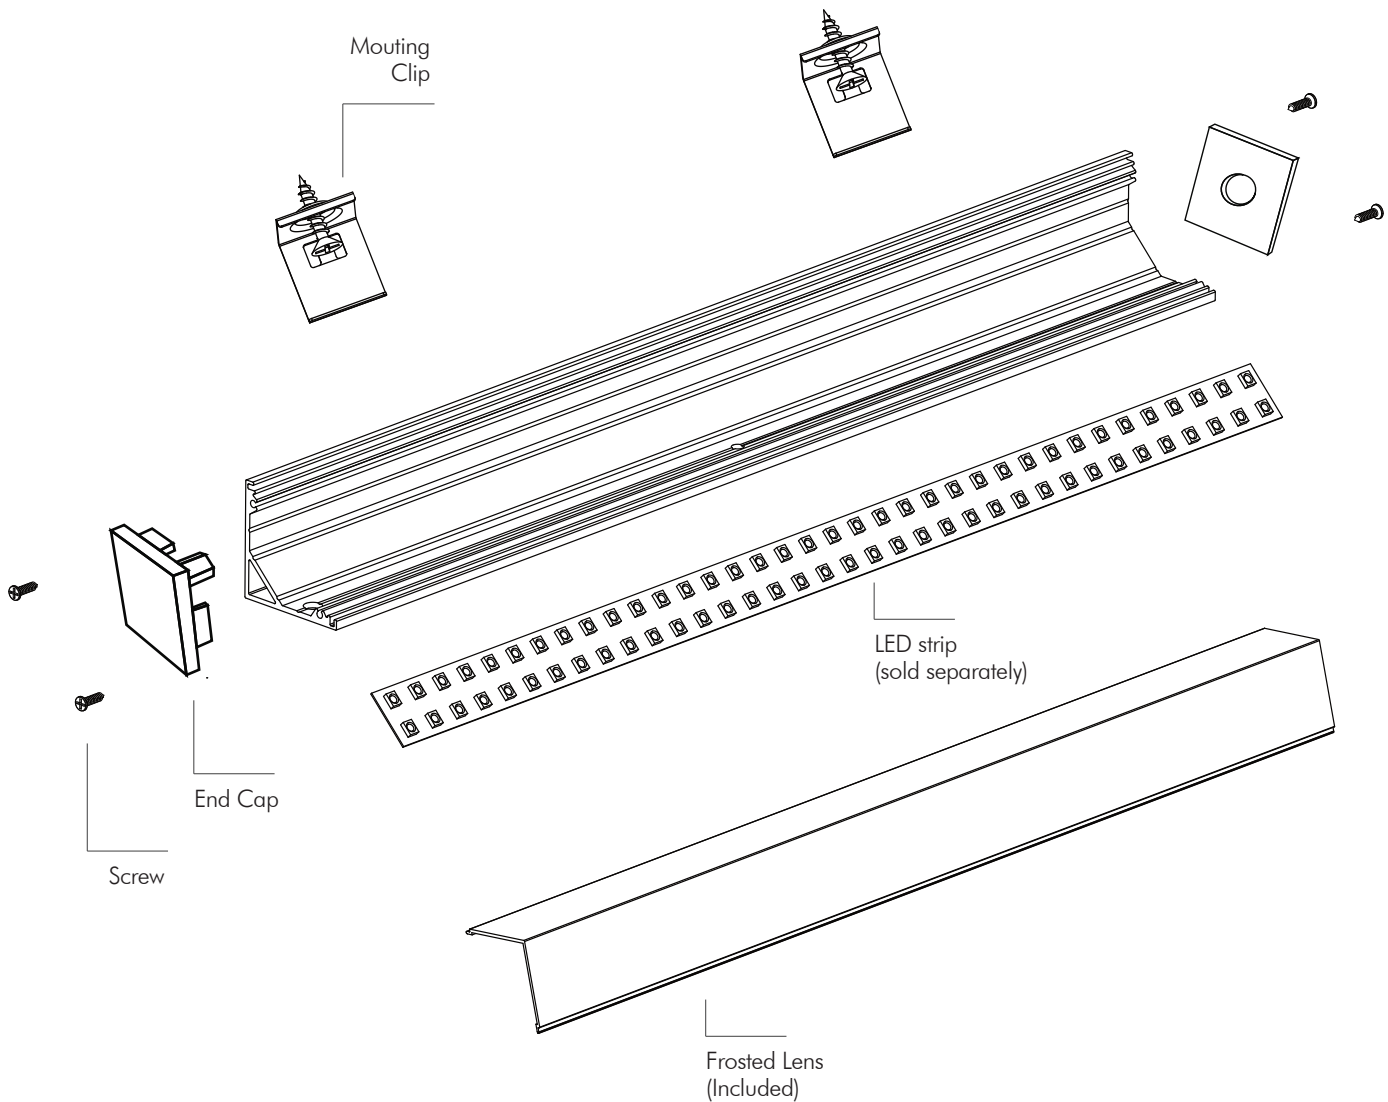

# ALP-100K-98

Surface/Corner Mount LED Profile

## COMPATIBLE LED STRIPS

Indoor	Outdoor	Color-changing
<b>LSM-15</b> 1.5W/FT, 120 Lumens	<b>LSMW-15</b> 1.5W/FT, 120 Lumens	<b>LSP-20-RGB</b> 2.2W/FT
<b>LSM-25</b> 2.2W/FT, 185 Lumens	<b>LSMW-25</b> 2.2W/FT, 185 Lumens	<b>LSP-50-RGB</b> 4.4W/FT
<b>LSM-30</b> 3.0W/FT, 250 Lumens	<b>LSMW-30</b> 3.0W/FT, 250 Lumens	<b>LSP-50-RGB-DX</b> 4.4W/FT Digital
<b>LSM-35WD</b> 3.6W/FT, Auto Warm Dim	<b>LSMW-40HF</b> 4.0W/FT, 440 Lumens	<b>LSP-50-RGB + W</b> 4.4W/FT, 165 Lumens
<b>LSM-40HF</b> 4.0W/FT, 440 Lumens		<b>LSP-60-RGB + W</b> 4.4W/FT, 165 Lumens
<b>LSM-45</b> 4.4W/FT, 370 Lumens		<b>LSPW-60-RGB + W</b> 4.4W/FT, 165 Lumens (outdoor)
<b>LSP-50</b> 4.4W/FT, 380 Lumens		
<b>LSM-55</b> 5.5W/FT, 500+ Lumens		
<b>LSM-55WD</b> 5.5W/FT, 348 Lumens		
<b>LSM-55MX</b> 5.5W/FT, 500+ Lumens		
<b>LSM-60</b> 6.0W/FT, 500 Lumens		
<b>LSM-60MX</b> 6.0W/FT, 500 Lumens		
<b>LSM-70HF</b> 6.6W/FT, 698 Lumens		
<b>LSM-75HF</b> 7.0W/FT, 784 Lumens		