

SPECIFICATION SHEET

JOB NAME: _____
 LOCATION: _____
 QUOTE/REF#: _____



The **SLG-4200** linear cove / wall washer comes in high and standard outputs with multiple color temperature options. Its proprietary small, adjustable mounting and continuous run connectors make the SLG-4200 series suitable for any architectural, retail, hospitality and display applications.

FEATURES



- Up to 1000+ Lumens per foot
- Up to 90+ Lumens per Watt
- Proprietary Optical Technology
- 0-10V, DMX and MultiVolt Input Options
- Small Profile Fixture
- Continuous Run Capability
- Proprietary Adjustable Mounting Bracket
- Facade Wall Washing
- Graze Lighting
- Signage

SPECIFICATIONS

POWER CONSUMPTION	11.9W (1ft) 48W (4ft)
MAXIMUM RUN LENGTH	48ft
OPERATING VOLTAGE	110-277V AC
OPERATING FREQUENCY	50 / 60 Hz
DRIVER	Internal / Built-in
STARTUP TEMPERATURE	-10°C~40°C (14°F~104°F)
OPERATING TEMPERATURE	-10°C~40°C (14°F~104°F)
STORAGE TEMPERATURE	-40°C~80°C (40°F~176°F)
CONTROL	110-277V AC 0-10V, DMX/RDM
LENS	Clear Polycarbonate
CONNECTORS	Integral Male / Female 5 pin
ENVIRONMENT	Indoor / Dry / Damp Location
DISTRIBUTION	10°x10° / 10°x60° / 30°x 60°
MOUNTING OPTIONS	Adjustable 80° + 80°
CERTIFICATIONS	ETL, Conforms to UL STD 1598 Certified to CSA STD C2.2 NO.250.0-08

CCT	LUMEN	EFFICACY
2200	993 lm/ft	84.6 lm/W
2500	1004 lm/ft	84.8 lm/W
2700	1015 lm/ft	85.3 lm/W
3000	1026 lm/ft	86.2 lm/W
3500	1038 lm/ft	87.2 lm/W
4000	1045 lm/ft	87.8 lm/W
5000	1056 lm/ft	88.3 lm/W

DIMENSIONS

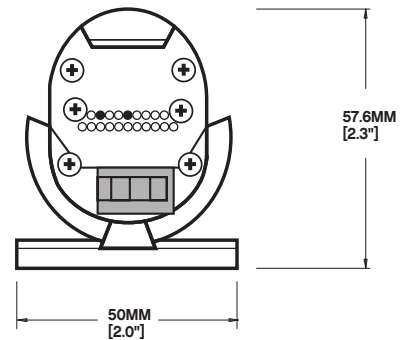

ORDERING GUIDE EX: SLG4200-48-27K-BG-MVOLT-DIM10

SLG4200					
MODEL	LENGTH	COLOR TEMP	OPTICS	VOLTAGE	DIMMING
	12 - 12" 48 - 48"	22K - 2200K 25K - 2500K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	BX - 10°x10° BV - 10°x60° BG - 30°x60°	MVOLT - 120V~277V	DIM10 - 0~10V

COMPATIBLE ACCESSORIES

SLG-LNK-12-DIM10 | 12" LINK CABLE
SLG-LNK-60-DIM10 | 60" LINK CABLE



SLG-HWC-120-DIM10 | 120" HARDWIRE CABLE

