

SPECIFICATION SHEET

JOB NAME: _____
LOCATION: _____
QUOTE/REF#: _____




Ring led pendant designed for retail or residential applications. Compact design with high lumen efficiency. Extruded aluminum frame is finished into a seamless ring available in different colors. Driver installs remotely.

FEATURES

- 650 Lumens per ft.
- 90+ CRI
- Pure aluminum body
- Suspension fixture
- Suitable for accent or ambient lighting
- Multiple CCT options available
- UL Listed
- Dimmable with CORE Lighting dimmable drivers

SPECIFICATIONS

INPUT VOLTAGE	110-277V
WATTAGE	25W 38W 50W 63W
AVAILABLE SIZES	24" 36" 48" 60"
LUMEN OUTPUT	650 Lm/Ft.
	90 Lm/W
LED CHIP EFFICIENCY	120-130 Lm/W
BEAM ANGLE	120°
CRI	90+
DIMMING	MLV, ELV, 0-10 and TRIAC
IP RATING	IP45 dry location (indoor)
LUMEN MAINTENANCE	50,000 hrs.
OPERATING TEMPERATURE	-40°F(-40°C)~+140°F(+60°C)
BINNING	1.5 Step Macadam Elipse
DIFFUSER	Silicone, 80% Transmittance
CERTIFICATIONS	UL listed

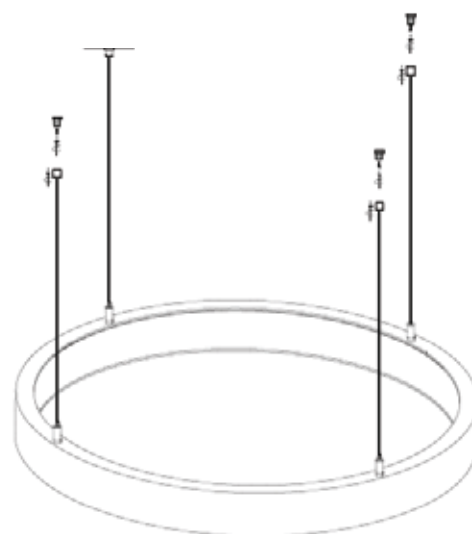

STANDARD ORDERING CODE

Model	Size (diameter) Wattage	Color Temp	Finish	Driver Options
CIRCA-UNO	24 - 24" 25W	27K - 2700K	BK - Black	EB PSDL Series, TRIAC / ELV dimming
	36 - 36" 38W	30K - 3000K	WH - White	D10 PSDE-96W-24V-010-JB, 0~10V Dimming
	48 - 48" 50W	35K - 3500K	SI - Silver	HL2W Lutron 2-Wire Dimming Driver.
	60 - 60" 63W	40K - 4000K		HL3E Lutron ECO 3-Wire Dimming Driver.
		50K - 5000K		