


SPECIFICATION SHEET

JOB NAME: _____
 LOCATION: _____
 QUOTE/REF#: _____

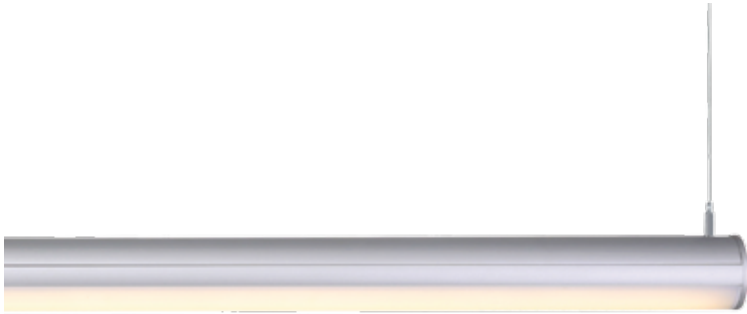

The CSL-225 is designed with a simple structure combined with the direct-indirect lighting concept which can provide uniform light output and excellent anti-glare effect. Advanced thermal management technology guarantees continuous high lumen output and constant CCT.


FEATURES

- Suspended luminaire
- Available lengths: 4Ft., 6Ft. & 8Ft.
- Up to 900 Lm per Ft.
- 118 Lm per Watt
- 0-10V dimming, TRIAC, ELV
- Finish options: Black, White & Silver
- 90+ CRI
- Aircraft cable suspension system
- High quality aluminum alloy
- Internal driver available for DIRECT option
- Multiple CCT options


SPECIFICATIONS

TYPE	Suspended
AVAILABLE LENGTHS	4Ft. / 6Ft. / 8Ft.
FINISH	White / Black / Silver
POWER CONSUMPTION	6W - 8W
DIMMING	0-10V
INPUT VOLTAGE	100V-277V
COLOR TEMP	27K / 30K / 35K / 40K / 50K
CRI	90+
LUMENS	Up to 1100 Lumens per Ft.
LENS	Frosted Acrylic Lens
POWER FEED	10Ft.
LIGHTING DISTRIBUTION	Up & Down
DRIVER	Remote or Internal
IP RATING	Dry and Damp Location

DIMENSIONS

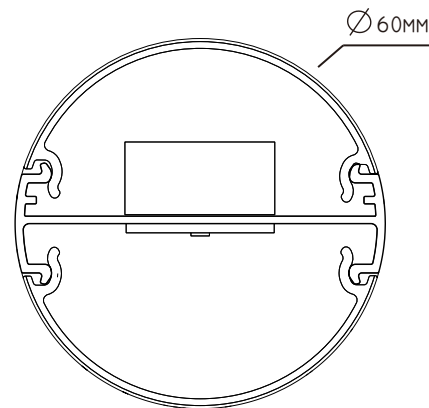

TYPE	LUMENS PER FOOT	WATTS PER FOOT
L1	550	6W
L2	700	7W
L3	900	8W



CSL-225 Direct/Indirect Suspended LED Luminaire

STANDARD ORDERING CODE: DIRECT OPTION

Model	Fixture length	Down Light	Color Temp	Finish	Voltage	Mounting	Driver
CSL-225	4 - 4Ft.	DL1 500Lm	27K 2700K	WH White	UNV 120V-277V	C12 12Ft. Cable	INTERNAL: EBINT Electronic / TRIAC
	6 - 6Ft.	DL2 700Lm	30K 3000K	BK Black			
	8 - 8Ft.	DL3 900Lm	35K 3500K	SI Silver			
			40K 4000K				
			50K 5000K				REMOTE: EB Electronic / TRIAC
							D10INT 1% 0-10V
							D10 1% 0-10V

STANDARD ORDERING CODE: DIRECT / INDIRECT OPTION

Model	Fixture length	Down Light	Up Light	Color Temp	Finish	Voltage	Mounting	Driver
CSL-225	4 - 4Ft.	DL1 500Lm	UL1 500Lm	27K 2700K	WH White	UNV 120V-277V	C12 12Ft. Cable	REMOTE: EB Electronic / TRIAC
	6 - 6Ft.	DL2 700Lm	UL2 700Lm	30K 3000K	BK Black			
	8 - 8Ft.	DL3 900Lm	UL3 900Lm	35K 3500K	SI Silver			
				40K 4000K				
				50K 5000K				D10 1% 0-10V

LIGHT OUTPUT

TYPE	LUMENS PER FOOT	WATTS PER FOOT
L1	550	6W
L2	700	7W
L3	900	8W

DRIVER OPTIONS:

EB
PSDL series, TRIAC / ELV dimming

D10
PSDE series, 0-10V dimming

NOTE:
INTERNAL DRIVER ONLY AVAILABLE
WITH DIRECT OPTION