


LSP50-RGBW 4.4W Indoor Color-changing + White LED Strip

CORE
ARCHITECTURAL
LIGHTING

JOB NAME: _____
LOCATION: _____
QUOTE/REF#: _____

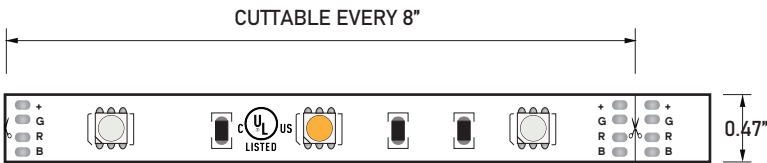

LSP50RGBW is a color changing flexible LED strip that provides a full spectrum of color options using red, green blue and white LED technology. The countless color mixing possibilities make RGB LEDs a diverse choice for even the most critical in lighting solutions and applications. It can be easily installed onto most surfaces with its attached double-sided mounting tape.


SPECIFICATIONS

INPUT VOLTAGE	24V DC
IP RATING	IP54 Indoor rated
CCT	RGBW
CRI	90+
WATTAGE	4.4W/FT
LUMENS	287Lm/FT
MAX RUN	25FT
CUTTING	8"
DIMMING	Through RGBW Controller
BEAM ANGLE	120°
OPERATING TEMP	5°C (41°F) to 70°C (158°F)
AMBIENT TEMP	-20°C (4°F) to 40°C (108°F)
RATING	UL listed, Dry location
LUMEN MAINTENANCE	50,000 Hrs.

FEATURES

- Full range RGB + White
- Designed for easy installation
- Fully compatible with DMX systems
- Indoor (dry) location rated
- UP to 25 FT continuous run
- California TITLE 24 JA8 compliant
- Field cuttable
- Suitable for accent or ambient lighting
- Multiple CCT options available
- Superior COLOR RENDERING INDEX (CRI)

RGBW COLOR SPECTRUM

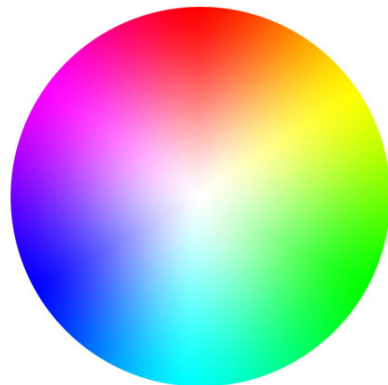

LSP50-RGBW

4.4W Indoor Color-changing + White LED Strip



STANDARD ORDERING CODE


Model	Color Temperature	Length	Voltage	Profile
LSP-50	RGBW27K RGBW + 2700K	16 16.4 Ft.	24 24 Volts	²See p3 for options
	RGBW30K RGBW + 3000K	100 100 Ft.		
	RGBW50K RGBW + 5000K	¹XX per Ft.		

NOTE:


- 1** = Custom length per Ft.
Cuttable every 8"
- 2** = Custom color finishes require
powder coating. Allow 7 days
lead time.

LSP50-RGBW 4.4W Indoor Color-changing + White LED Strip


COMPATIBLE ALUMINUM PROFILES




ALU-SF Surface
LENGTHS 39^{3/8}" | 78^{7/8}" | 98"
LENS Clear, Frosted
FINISH Silver | Black




ALU-DS100 Surface Wide
LENGTHS 39^{3/8}" | 78^{7/8}" | 96"
LENS Clear, Frosted
FINISH Silver




ALU-CN Surface, Corner
LENGTHS 39^{3/8}" | 78^{7/8}" | 96"
LENS Clear, Frosted
FINISH Silver | Black




ALP-50C Surface, Corner
LENGTHS 49.25" | 98.5"
LENS Frosted
FINISH White | Black | Silver




ALP-70 Surface
LENGTHS 49.25" | 98.5"
LENS Frosted
FINISH White | Black | Silver




ALP-80 Surface, Suspended
LENGTHS 49.25" | 98.5"
LENS Frosted
FINISH Silver




ALP-90 Surface
LENGTHS 48" | 96"
LENS Frosted
FINISH Silver



ALP-130 Surface, Suspended
LENGTHS 49.25" | 98.5"
LENS Frosted
FINISH Silver



ALP-140 Surface, Suspended
LENGTHS 49.25" | 98.5"
LENS Frosted
FINISH Silver

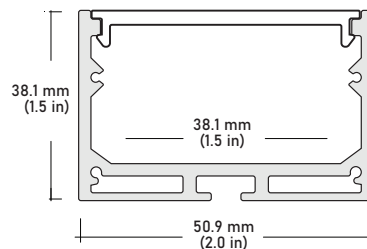


ALP-160 Surface, Suspended
LENGTHS 48" | 98"
LENS Frosted
FINISH Silver


LSP50-RGBW 4.4W Indoor Color-changing + White LED Strip

COMPATIBLE WALL CONTROLLERS

RGB-SDE3	INPUT POWER	6V DC 0.6A
	OUTPUT SIGNAL	DMX512 (x2)
	PROGRAMMABILITY	PC, MAC, Tablet, Smartphone
	AVAILABLE COLORS	Black / White
	CONNECTIONS	USB, Ethernet, RS232, Clock, 8dry contact ports, 5V output relay
	MEMORY	microSD card
	WORKING TEMP	-10°C ~ 45°C
	MOUNTING	Single or double gang wall socket
	WEIGHT (gross)	247g

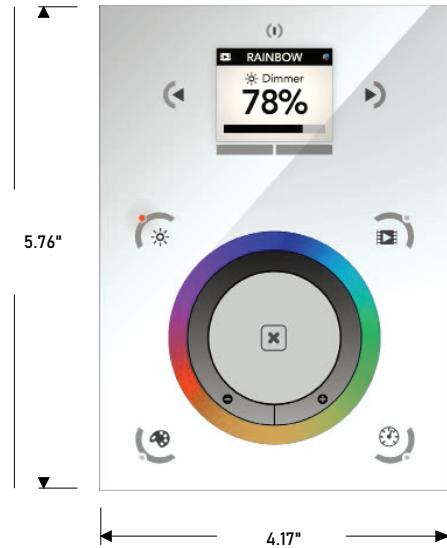

RGB-SCW4	INPUT POWER	5-10V DC 0.6A
	OUTPUT PROTOCOL	DMX512 (X2)
	PROGRAMMABILITY	PC / MAC
	AVAILABLE COLORS	Black / White
	CONNECTIONS	USB, 8 dry contact ports Open drain output (for relay)
	MEMORY	Built-in flash
	TEMPERATURE	-10°C ~ 45°C
	MOUNTING	Single or double gang socket
	DIMENSIONS	LxWxH (146mm x 106mm x 11mm)
	WEIGHT	200g
	STANDARDS	EC / EMC / ROHS

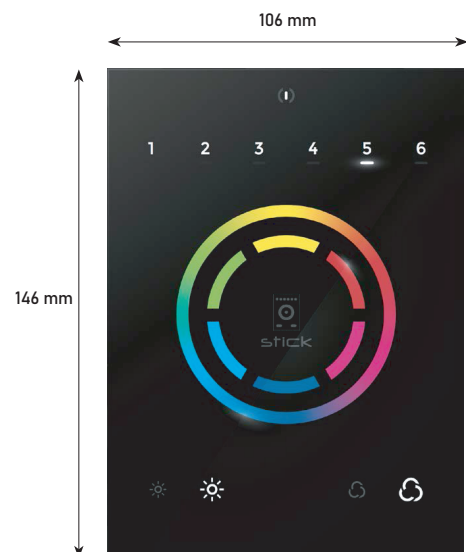

ALP-130 SURFACE / SUSPENDED

LENGTHS 49.25" and 98.5"

LENS Frosted


FINISH Anodized Aluminum

LSP50-RGBW 4.4W Indoor Color-changing + White LED Strip



COMPATIBLE DMX RECEIVERS

RGB-DMX5C-XLR	INPUT	12V-24V-36V DC
	OUTPUT CURRENT	8A X 5CH

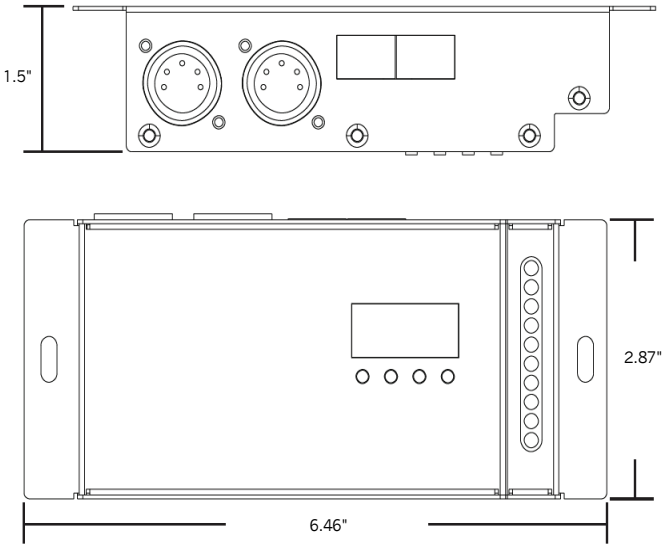

LSP50-RGBW 4.4W Indoor Color-changing + White LED Strip

COMPATIBLE NON-DIMMING TRANSFORMERS

PSHW SERIES 24V

	CLASS 2	L X W X H
PSHW-10W-24V	YES	2.55" X 1.37" X .90"
PSHW-20W-24V	YES	4.64" X 1.38" X 1.2"
PSHW-35W-24V	YES	5.83" X 1.57" X 1.18"
PSHW-60W-24V	YES	6.38" X 1.65" X 1.18"
PSHW-100W-24V	NO	7.44" X 2.4" X 1.45"
PSHW-150W-24V	NO	8.75" X 2.68" X 1.53"
PSHW-200W-24V	NO	9.62" X 2.68" X 1.53"
PSHW-300W-24V	NO	9.92" X 3.55" X 1.75"



PSHK SERIES

	CLASS 2	L X W X H
PSHK-30W-24V-UNV	YES	6.5" X 3.6" X 1.02"
PSHK-60W-24V-UNV	YES	7.4" X 3.6" X 1.02"
PSHK-96W-24V-UNV	YES	8.66" X 3.6" X 1.61"
PSHK-150W-24V-UNV	YES	10.24" X 4.06" X 1.81"
PSHK-200W-24V-UNV	NO	10.24" X 4.06" X 1.81"
PSHK-300W-24V-UNV	NO	10.94" X 4.25" X 1.81"

