

ALP3200SCX

Recessed Stucco LED Profile

CORE
ARCHITECTURAL
LIGHTING

JOB NAME: _____
LOCATION: _____
QUOTE/REF#: _____



The **ALP-3200SCX** is an architectural-grade LED profile designed for **stucco applications** and compatible with LED strips up to 37.5mm (1.47") wide. Made from high quality aluminum, these extrusions provide superior thermal management for LED strips prolonging the lighting system's lifespan. It is manufactured with a patented frosted diffuser for maximum lumen output and wider beam distribution.

FEATURES

- Customizable
- Trimless, recessed design
- Stucco applications
- 2" Aperture
- Protects LED systems from dust and other elements
- Dissipates heat from LED, prolonging its lifetime
- Lens sold separately
- End cap sold separately

SPECIFICATIONS


TYPE	Recessed mount
AVAILABLE LENGTHS	48" and 98.5"
FINISH	Anodized Silver
APERTURE	2"
LENS OPTIONS	Frosted
CHANNEL	ALP-3100TLX
LENS (SOLD SEPARATELY)	ALP-3000LNX
END CAP (SOLD SEPARATELY)	ALP-3000-EC

Compatible with LED strips up to **37.5mm (1.47") wide**.

LED tape light sold separately.

Custom color finishes available (powder-coating).

Remote mounted power supply sold separately

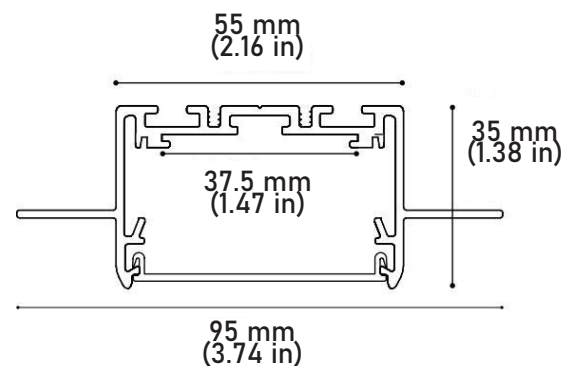

ALP3200SCX

Recessed Stucco LED Profile

STANDARD ORDERING CODE

Model	Length	Light Engine	Finish
ALP3200SCX Stucco profile	48 48 in	See p3 for options	SI Silver
	98 98.5 in		CU Custom (powder-coat)

Model	Length
ALP3000LNX Lens	48 48 in
	98 98.5 in
	PF per Ft.

NOTE:

Custom color finishes require powder coating. Allow 7 days lead time.

ALP3200SCX

Recessed Stucco LED Profile

CORE
ARCHITECTURAL
LIGHTING

COMPATIBLE LED STRIPS

ALP-3000LNX | Lens (sold separately)

TYPE FR

LENGTHS 48", 98.5" and per Ft.



ALP-3200SCX | Aluminum profile

MOUNTING Recessed

LENGTHS 48" and 98.5"



ALP-3000-EC | End Cap

*sold separately



COMPATIBLE LED STRIPS

Indoor	Outdoor	Color-changing
LSM-25 2.2W/Ft., 185 Lumens	LSMW-25 2.2W/FT, 185 Lumens	LSP-20-RGB 2.2W/FT
LSM-30 3.0W/Ft., 250 Lumens	LSMW-30 3.0W/FT, 250 Lumens	LSP-50-RGB 4.4W/FT
LSM-32CB 3.2W/Ft., 292 Lumens	LSMW-35WD 3.6W/FT Auto warm-dim	LSP-50-RGB-DX 4.4W/FT Digital
LSM-35 3.0W/Ft., 290 Lumens	LSMW-40HF 4.0W/Ft., 440 Lumens	LSP-52-RGBW 4.4W/FT
LSM-35WD 3.6W/Ft., Auto warm-dim	LSMW-60 6W/Ft., 500 Lumens	LSM-55-RGBW 5W/FT
LSM-40HF 4.0W/Ft., 440 Lumens	LSMW-60MX 6W/Ft., Color-tuning	LSP-70-RGBWW 7W/FT
LSM-45 4.4W/Ft., 370 Lumens		
LSP-50 4.4W/Ft., 380 Lumens		
LSM-55 5.5W/Ft., 500+ Lumens		
LSM-55MX 5.5W/Ft., 500+ Lumens		
LSM-55WD 5.5W/Ft., Auto warm-dim		
LSM-60 6W/Ft., 500 Lumens		
LSM-75HF 7W/Ft., 784 Lumens		
LSP-80 8.8W/Ft., 720 Lumens		
LSM-90HF 7.9W/Ft., 930 Lumens		
LSM-105 10W/Ft., 840 Lumens		
LSM-105WD 9W/Ft., 720 Lumens		