

SPECIFICATION SHEET

JOB NAME: _____
LOCATION: _____
QUOTE/REF#: _____



The ALP-125 is a versatile and efficient Linear LED lighting system available in different lengths and color temperatures. It features a unique design that allows it to swivel 360° and can be mounted in any orientation to direct light source towards sign, ceiling, wall or workplane. Seamless and continuous run installations deliver efficient illumination.


FEATURES


- 1 1/8" inches in diameter
- Unique 360° swivel design
- Multiple mounting orientations
- Slim profile, modular design
- REMOTE MOUNTED POWER SUPPLY SOLD SEPARATELY


SPECIFICATIONS

TYPE	Wall Mount
AVAILABLE LENGTHS	24", 36", 48", 72" and 96"
FINISH	Brushed Aluminum
POWER CONSUMPTION	3.0W/Ft. or 5.5W/Ft.
DIMMING	ELV / 0-10V (remote driver)
DRIVER	Remote Mounted (Sold Separately)
COLOR TEMP	27K / 30K / 35K / 40K / 50K
CRI	90 CRI
SWIVEL	360°
LUMEN MAINTENANCE	50,000 Hrs

DIMENSIONS

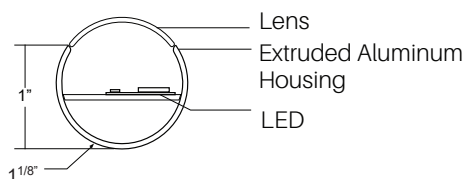

2' Overall length 24.98" (63.45cm)


3' Overall length 36.75" (93.35cm)


4' Overall length 48.67" (123.62cm)


6 Ft. multi-unit installation


8 Ft. multi-unit installation



ALP-125 Linear LED System

SPECIFICATION CODE

Model	Fixture Length	Light Output	Color Temp	Finish	Lens	Voltage	Stem Length	Driver	Mounting
Model	Fixture Length	Light Output	Color Temp	Finish	Lens	Voltage	Stem Length	Driver	Mounting
ALP-125	24- 24"	L2- 3.0W	27- 2700K	BA	FR	120-120V	STM6-6"	EB	RC2
	36- 36"	L3- 5.5W	30- 3000K	Brushed	Frosted	277-277V	STM12-12"	Electronic / TRIAC	2" Wall Canopy
	48- 48"		35- 3500K	Aluminum			STM18-18"		
	72- 72"		40- 4000K				STM24-24"	D10	RC5
	96- 96"		50- 5000K	1WH				1% 0-10	5" Wall Canopy
				White				HL2W	
								Lutron 2-Wire	
								HL3E	
								Lutron ECO 3-Wire	

NOTES:

*REMOTE MOUNTED POWER SUPPLY REQUIRED
(SOLD SEPARATELY)

*Other Lumen package available, consult factory

LIGHT OUTPUT

L2	3.0 WATTS / FT.	290 LUMENS / FT.
L3	5.5 WATTS / FT.	500 LUMENS / FT.

DRIVER OPTIONS

EB	PSDL Series, TRIAC / ELV dimming
D10	PSDE-96W-24V-010-JB, 0~10V Dimming
HL2W	Lutron 2-Wire Dimming Driver.
HL3E	Lutron ECO 3-Wire Dimming Driver.