


SLINQ RGB

RGB FLEXIBLE 360° ROUND NEON SERIES

Slinq RGB— IP65 rated, flexible neon rope light is a true game-changer, with its 360° illuminating capabilities and vibrant RGB color options. Unleash your creativity to create any desired shape, freeform pattern, grid, icicle chandeliers, or simply drape it along walls and ceilings. Perfect for any project, whether you're looking to create an eye-catching centerpiece or simply add some ambiance to your living space.

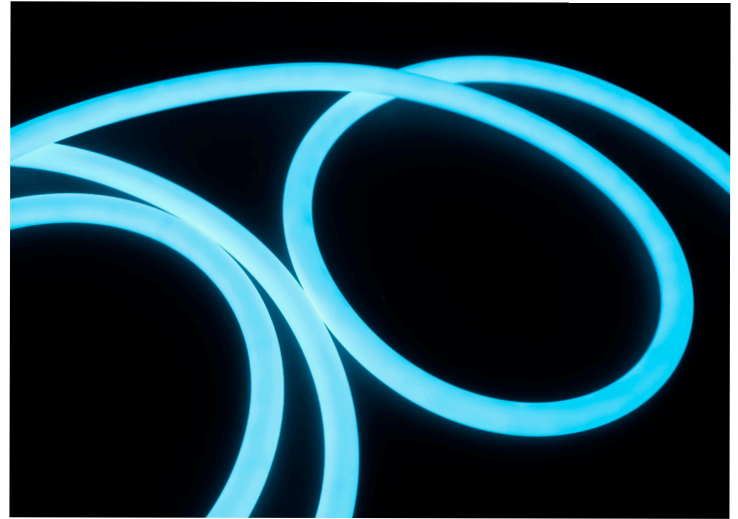

SPECIFICATIONS

POWER CONSUMPTION	4.4W per foot
LUMEN OUTPUT	317 Lm/ Ft.
CRI	90+
COLOR TEMPERATURE	RGB
MAXIMUM RUN LENGTH	16 Ft.
OPERATING VOLTAGE	24V
STORAGE TEMPERATURE	-30°C to 60°C
OPERATING TEMPERATURE	30°C (-22°F) to 55°C (131°F)
BEAM ANGLE	360°
IP RATING	IP65 Outdoor/ Wet Location
LUMEN MAINTENANCE	50,000 Hrs.

FEATURES

- 360° Light Source
- Multiple Mounting Options
- DMX Control
- IP65 Outdoor Rated
- Factory-Installed Power Feed
- Injection Moulded End-Caps
- Ideal for Decorative, Retail, Artistic Lighting





MODEL	LENGTH	COLOR TEMP	VOLTAGE	MOUNTING OPTIONS	POWER FEED
SLQ-25	Per Inch Per Inch	RGB RGB	24V 24 Volts	AR Arch SF Surface Pendant SUP Suspended Pendant SCS Suspension Cable Support TES Telescopic Extension Support	EF72 72" End Feed SF72 72" Side Feed

SLINQ RGB



RGB FLEXIBLE 360° ROUND NEON SERIES

MOUNTING OPTIONS


ARCH (AR)





MOUNT CAP 1





MOUNT CAP 2




SURFACE PENDANT (SF)





END CAP





CEILING MOUNT



SUSPENDED PENDANT (SUP)






END CAP

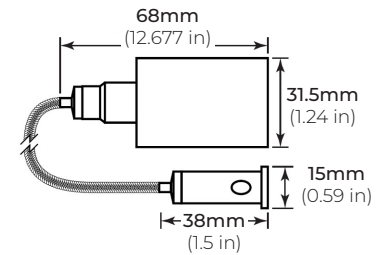


SUSPENDED PENDANT

* Cable Length = 72"


SUSPENSION CABLE SUPPORT (SCS)

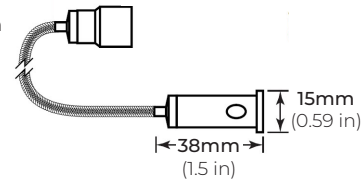



* 72" Cable included



TELESCOPIC EXTENSION SUPPORT (TES)



* 13 - 24" Extension




SLINQ RGB


RGB FLEXIBLE 360° ROUND NEON SERIES

ACCESSORIES



VISIBLE MOUNTING CLIP (VMC)






DISCREET MOUNTING BRACKET (DMB)

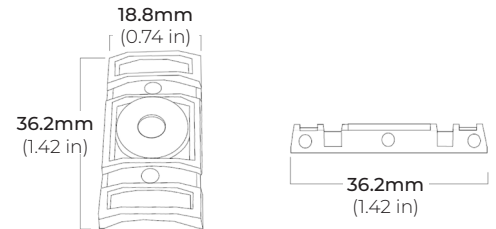


INFINITY JOINER (IJ)

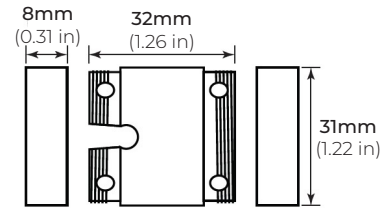

DIMENSIONS

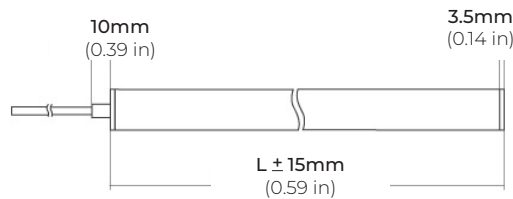

END FEED

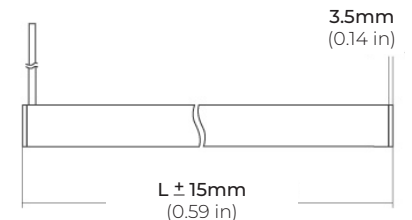

SIDE FEED


SLINQ RGB

RGB FLEXIBLE 360° ROUND NEON SERIES

CONTROLLERS


RGB CT600 MULTI-FUNCTION RGBW WALL CONTROLLER

INPUT VOLTAGE	5V DC, 1A
OUTPUT SIGNAL	RF 2.4GHZ + DMX512
CONTROL	4 ZONES
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.19"x7.08"x1.38")




RGB-SDE3 MULTI-FUNCTION RGBW WALL CONTROLLER

INPUT VOLTAGE	6V DC, 0.6A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC/ Tablet/ Smartphone
COLOR	Black/ White
CONNECTIONS	USB/ Ethernet/ RS232/ CLock/ 8dry contact ports/ 5V output relay
MEMORY	MicroSD Card
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



RGB-SCW4 WiFi DMX WALL CONTROLLER

INPUT VOLTAGE	5 - 10V DC, 0.6A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC
COLOR	Black/ White
CONNECTIONS	USB/ 8dry contact ports/ Open drain output (for relay)
MEMORY	Built-In Flash
WORKING TEMP	-10°C ~ 45°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")




SLINQ RGB

RGB FLEXIBLE 360° ROUND NEON SERIES

COMPATIBLE DMX DRIVERS


RGB-DMX-4C-RJ45 4-CHANNEL DMX DECODER

INPUT	12V-24V DC
OUTPUT CURRENT	8A X 4CH
OUTPUT POWER	240W(12V), 720W(24V)
OUTPUT CHANNELS	3 or 4 Selectable
DIMENSIONS	LxWxH (7"x1.77"x0.75")

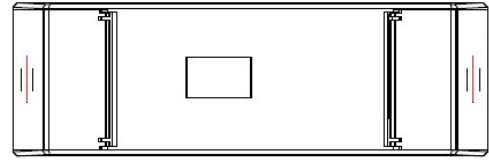

RGB-DMX-5C-XLR 5-CHANNEL DMX DECODER

INPUT	12V-24V-36V DC
OUTPUT VOLTAGE	12V-24V DC
OUTPUT CURRENT	8A X 5CH
OUTPUT WATTAGE	5 x (96W ~ 192W)
DIMENSIONS	LxWxH (6.45"x2.87"x1.5")

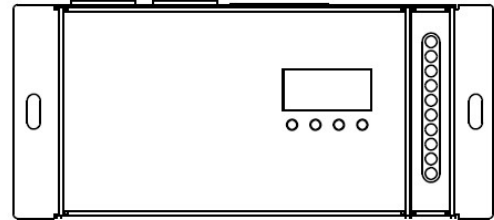

COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V	CLASS 2	10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

