

JOB NAME: _____
 LOCATION: _____
 QUOTE/REF#: _____



RGB-CT600 Wall Controller is a sleek DMX glass wall controller with optional remote or WiFi programming via iPhone/iPad and Android devices (requires RGB-CT500-Wifi - sold separately). Integrated keypad provides easy scene control and 4 zone control. Features include 2.4G RF and 512 DMX output channels.


FEATURES

- iOS and Android Compatible (requires RGB-CT500-Wifi sold separately).
- Sleek, slim and stylish glass face.
- Multi-function RGB+W touch panel
- Universal installation, suitable for various wall boxes.
- DMX512 / RF Wireless / WiFi Control / Remote Control
- Individual 4 zone control
- 4 Scene control.

SPECIFICATIONS

INPUT VOLTAGE	5V DC / 1A
OUTPUT SIGNAL	RF 2.4GHz + DMX512
CONTROL	4 Zones / 4 Scenes
POWER FAILURE MEMORY	YES
OPERATING TEMPERATURE	-20°C ~ 40°C (-4°F ~ 104°F)
AMBIENT TEMPERATURE	-20°C ~ 75°C (-4°F ~ 167°F)
ENVIRONMENT	Indoor / Dry location only
DIMENSIONS	LxWxH (132mm x 180mm x 35mm)

DIMENSIONS

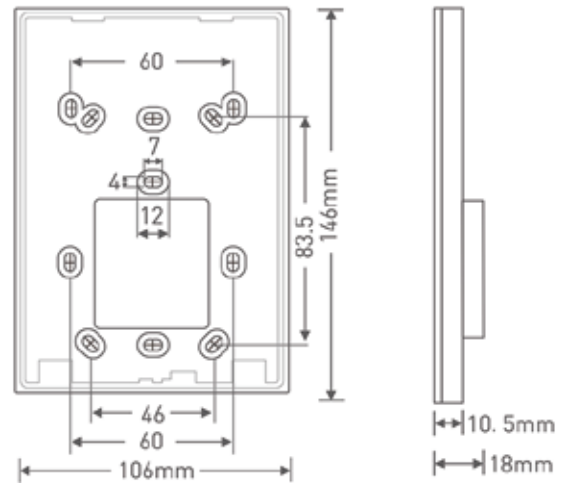

COMPATIBLE ACCESSORIES

RGB-CT500-RM8 | LED CONTROLLER



RGB-CT500-WiFi | WiFi LED CONTROLLER
RGB-CT500-WiFi-ZR | WiFi ZONE RECEIVER



COMPATIBLE DMX DECODERS

RGB-DMX-4C | DMX DECODER W/ DIGITAL DISPLAY

POWER INPUT	12V DC ~ 24V DC
MAX CURRENT LOAD	MAX 8A x 4CH
MAX OUTPUT POWER	384W (12V) 1152W (24V)
DIMENSIONS	LxWxH (7.04" x 1.79" x 0.73")



RGB-DMX-4C-RJ45 | 4 CHANNEL RGB DMX DECODER

POWER INPUT	12V DC ~ 24V DC
MAX CURRENT LOAD	MAX 8A x 4CH
MAX OUTPUT POWER	384W (12V) 1152W (24V)
DIMENSIONS	LxWxH (6.5" x 2.36" x 1.25")



RGB-DMX-5C-XLR | 5 CHANNEL RGB DMX DECODER

POWER INPUT	12V DC ~ 24V DC
MAX CURRENT LOAD	MAX 8A x 5CH
MAX OUTPUT POWER	5 x 96 ~ 288W
DIMENSIONS	LxWxH (6.46" x 2.87" x 1.5")
INPUT/OUTPUT PORTS	XLR 3&5 pin, RJ45, DMX



RGB-DMX-4C-WP | 4CH WATERPROOF DMX DECODER

POWER INPUT	12V DC ~ 24V DC
MAX CURRENT LOAD	MAX 5A x 4CH
MAX OUTPUT POWER	4 x (60 ~ 180W)
DIMENSIONS	LxWxH (7.11" x 2.9" x 1.5")

***IP67 WET LOCATION / WATERPROOF**

