

# LWW-SL

## High-Output Gen-3 Linear LED Wall Washer





LWW-SL Linear Wall washer series is a powerful LED flood light typically used for building facades, signs or any wall washing applications. Variety of optical lens options provides endless lighting solutions. Available in narrow, medium, wide and elliptical optic options.

### FEATURES

- Up to 82 Lumens per Watt
- Linkable up to 12Ft.
- Proprietary Optical Technology
- TRIAC Dimming
- Proprietary Adjustable Mounting Bracket
- Facade Wall Washing
- Graze Lighting
- Signage

### SPECIFICATIONS

<b>INPUT VOLTAGE</b>	24V DC
<b>POWER CONSUMPTION</b>	7W per Ft.
<b>LUMEN PER WATT</b>	82 lm/W
<b>BEAM ANGLE</b>	15° / 25° / 50° / 10°x40°
<b>CRI</b>	90+
<b>DIMMING</b>	TRIAC
<b>MAXIMUM RUN LENGTH</b>	Linkable up to 12 Ft.
<b>IP RATING</b>	IP65 wet location (outdoor)
<b>LUMEN MAINTENANCE</b>	50,000 hrs.
<b>OPERATING TEMPERATURE</b>	-40°F TO 122°F (-40°C TO 50°C)
<b>OPERATING TEMPERATURE</b>	-40°F TO 176°F (-40°C TO 80°C)

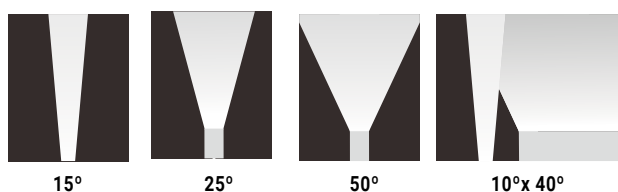

# LWW-SL

## High-Output Gen-3 Linear LED Wall Washer

### STANDARD ORDERING GUIDE

Model	Legth	Color Temp	Optics	Mounting Option	Finish Option	Voltage
LWW-SL	20 20" (12W)	22K 2200K	15 15°	FMB Fixed Mounting Bracket	TG Titanium Gray	24 24Volts DC
		27K 2700K	25 25°	STB Standard Tilting Bracket	*BK Black	
	40 40" (24W)	30K 3000K	50 50°	ETB Extended Tilting Bracket	*WH White	
		40K 4000K	10X40 10° x 40°			
		50K 5000K				
		60K 6000K				
		RD Red				
		GN Green				
		BL Blue				
		AM Amber				

\* Special order item- allow up to 4 weeks of lead time




THIS FIXTURE IS NOT COMPATIBLE WITH PSDH AND PSDM SERIES DRIVERS. DIMMING IS ONLY AVAILABLE WITH 0-10 DRIVERS

# LWW-SL


## High-Output Gen-3 Linear LED Wall Washer

### ACCESSORIES


**LWW-SL-FMB**  
Fixed Mounting Bracket  
(sold separately)



**LWW-SL-STB**  
Standard Tilting Bracket  
(included with every fixture)



**LWW-SL-ETB**  
Extended Tilting Bracket  
(sold separately)




# LWW-SL


## High-Output Gen-3 Linear LED Wall Washer

### ACCESSORIES

**LWW-SL-12-SDLV**  
**LWW-SL-20-SDLV**  
**LWW-SL-24-SDLV**  
**LWW-SL-40-SDLV**  
**LWW-SL-48-SDLV**  
12", 20", 24", 40", 48"  
Symmetric Louver  
(sold separately)



**LWW-SL-12-ADLV**  
**LWW-SL-20-ADLV**  
**LWW-SL-24-ADLV**  
**LWW-SL-40-ADLV**  
**LWW-SL-48-ADLV**  
12", 20", 24", 40", 48"  
Asymmetric Louver  
(sold separately)



**LWW-LNK-10**  
**LWW-LNK-36**  
**LWW-LNK-72**  
10", 36", 72"  
Link Extension Cable  
(sold separately)



**LWW-HWC-72-BK**  
72" Hardwire Cable  
(sold separately)




# LWW-SL

## High-Output Gen-3 Linear LED Wall Washer


### PHOTOMETRICS

3500K CRI80  
Beam Angle (50%) 15°  
Field Angle (10%) 35°

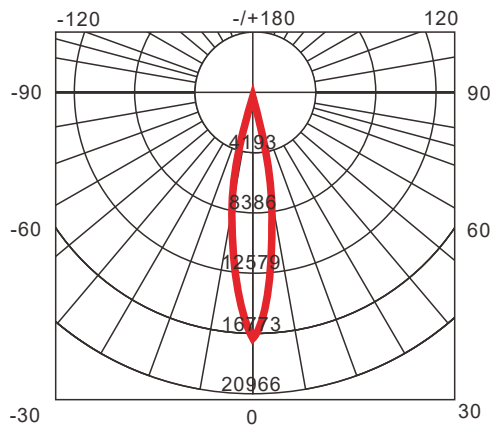


Unit: cd  
— C0-C180 — C90-C270

3500K CRI80  
Beam Angle (50%) 30°  
Field Angle (10%) 55°

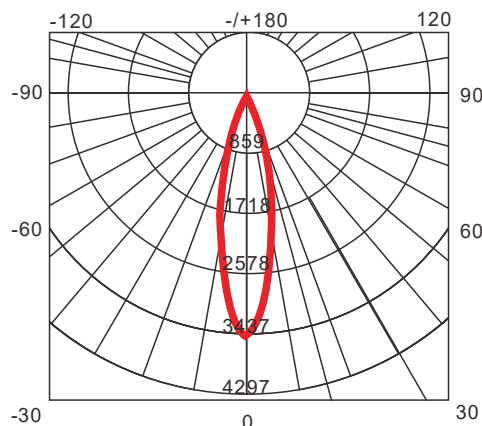


Unit: cd  
— C0-C180 — C90-C270

3500K CRI80  
Beam Angle (50%) 15°  
Field Angle (10%) 85°

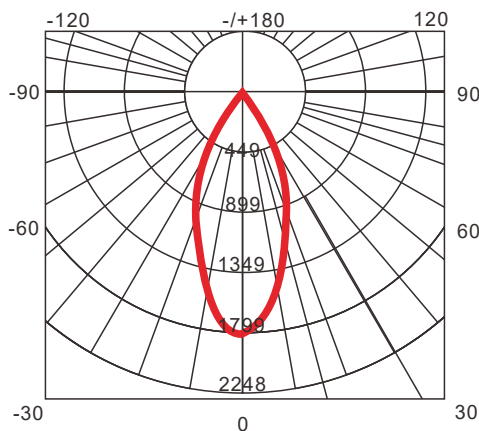

Unit: cd  
— C0-C180 — C90-C270

3500K CRI80  
Beam Angle (50%) 10° X 40°  
Field Angle (10%) 30° X 65°

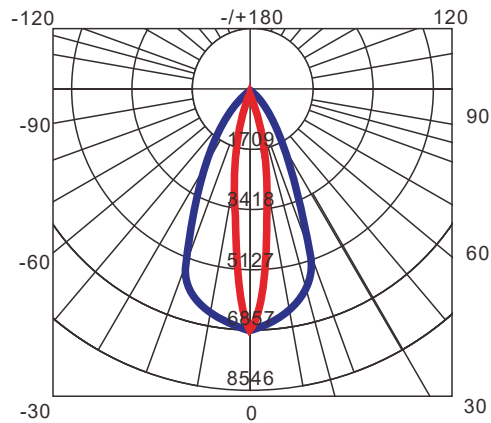

Unit: cd  
— C0-C180 — C90-C270

# LWW-SL


## High-Output Gen-3 Linear LED Wall Washer

### COMPATIBLE DRIVERS

#### PSDL SERIES

TRIAC DIMMABLE


<b>PSDL-30W-24V</b>	CLASS 2	6.5" x 3.63" x 1.03"
<b>PSDL-60W-24V</b>	CLASS 2	7.4" x 3.63" x 1.03"
<b>PSDL-96W-24V</b>	CLASS 2	8.67" x 3.67" x 1.62"
<b>PSDL-150W-24V</b>		8.67" x 3.67" x 1.62"
<b>PSDL-192W-24V</b>	CLASS 2	10.25" x 4.06" x 1.82"
<b>PSDL-200W-24V</b>		10.25" x 4.06" x 1.82"
<b>PSDL-288W-24V</b>	CLASS 2	10.25" x 4.06" x 1.82"
<b>PSDL-300W-24V</b>		10.25" x 4.06" x 1.82"

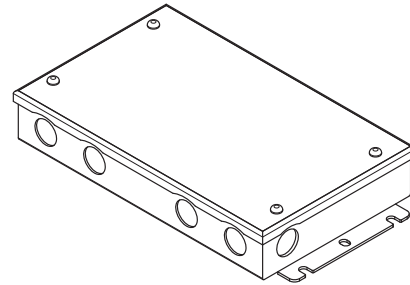

#### PSHK SERIES

NON-DIMMING W/ JUNCTION BOX

<b>PSHK-30W-24V-UNV</b>	CLASS 2	6.5" X 3.6" X 1.02"
<b>PSHK-60W-24V-UNV</b>	CLASS 2	7.4" X 3.62" X 1.02"
<b>PSHK-96W-24V-UNV</b>	CLASS 2	8.66" X 3.66" X 1.61"
<b>PSHK-150W-24V-UNV</b>		10.24" X 4.06" X 1.81"
<b>PSHK-200W-24V-UNV</b>		10.24" X 4.06" X 1.81"
<b>PSHK-300W-24V-UNV</b>		10.94" X 4.25" X 1.81"

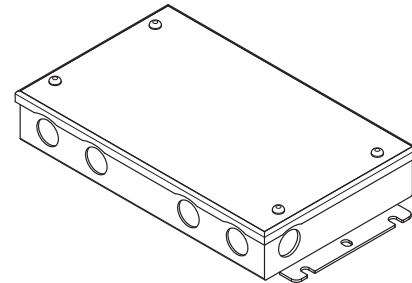

#### PSVT SERIES

0-10V DIMMING DRIVER

<b>PSVT-60W-24V</b>	CLASS 2	7.4" X 3.72" X 1.57"
<b>PSVT-96W-24V</b>	CLASS 2	8.66" X 3.72" X 1.57"
<b>PSVT-200W-24V</b>		10.24" X 4.13" X 1.77"
<b>PSVT-288W-24V</b>	CLASS 2	11.85" X 4.25" X 1.81"
<b>PSVT-300W-24V</b>	CLASS 2	10.94" X 4.33" X 1.77"

