
LINEAR-PIXEL BAR



120V-277V INDOOR/ OUTDOOR ACCENT LIGHT

The **Linear Pixel Bar** is a powerful 120V LED linear luminaire ideal for media facades and delineation of largescale structures such as bridges and towers. IP66-rated for outdoor applications, the Linear Pixel Bar's acrylic square or rounded diffuser lenses produce perfectly uniform and saturated light that can be controlled with up to 12 in resolution for dynamic shows and monochrome video effects.

Project	
Location	
Ouote/ Ref #	

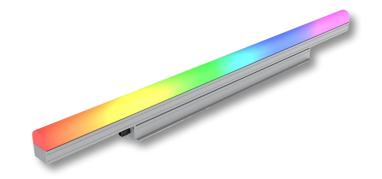

SPECIFICATIONS

 INPUT VOLTAGE
 120V-277V

 POWER CONSUMPTION
 8W per Ft.

 LEDS PER FIXTURE
 12 LEDs (24")

 18 LEDs (36")
 24 LEDs (48")

PIXELS Adressable Every 2 in.

LUMEN OUTPUT Up to 265 Lm/ Ft. (Square Lens) Up to 260 Lm/ Ft. (Round Lens)

BEAM ANGLE 140° x 110° (Square Lens) 180° x 110° (Round Lens)

COLOR TEMPERATURE RGBW+30K

DIMMING/ CONTROL DMX **MAXIMUM RUN LENGTH** 20 Ft.

IP RATING IP66 Wet Location Rated

AMBIENT TEMPERATURE -4°F (-20°C) to +122°F (+50°C)

LUMEN MAINTENANCE50,000 Hrs.CERTIFICATIONSUL ListedWARRANTY5 years

FEATURES

- · 120V-277V
- · 8W per Ft
- · 265 Lumens per Ft.
- DMX Control
- · IP66 Wet Location
- · UL Listed


MODEL	LENGTH	COLOR TEMP	MOUNTING	LENS	FINISH
36 35.43 ii 48	24 23.62 in.	RGBW30K RGB + 3000K	FMB Fixed Mounting	SQ Square	WH White
	36 35.43 in.	 	AM Adjustable Mounting	RN Round	BK Black
	48 47.24 in.	1 		 	GR Grey
	 	1 1 1 1		 	

LINEAR-PIXEL BAR




120V-277V INDOOR/ OUTDOOR ACCENT LIGHT

DIMENSIONS

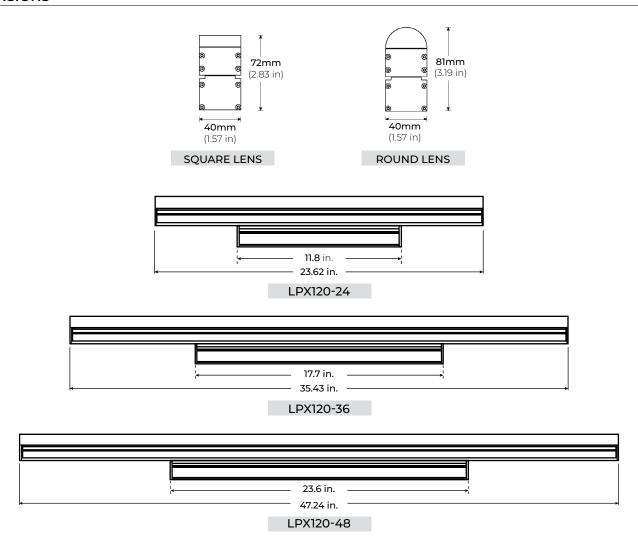

OPTICS

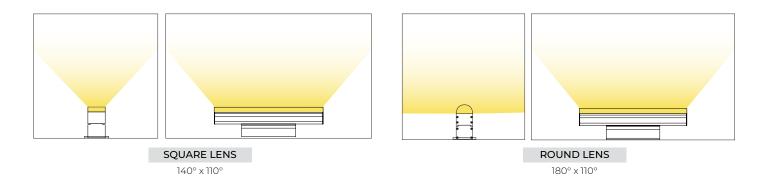

LINEAR-PIXEL BAR



120V-277V INDOOR/ OUTDOOR ACCENT LIGHT


MOUNTING OPTIONS

LPX120-FMB FIXED MOUNTING BRACKET



LPX120-AM ADJUSTABLE MOUNTING









89mm

(3.5 in)

50mm (1.97 in)

COMPATIBLE ACCESSORIES

LPX120-LNK-10 LPX120-LNK-36 LPX120-LNK-72 10", 36", 72" LINK EXTENSION CABLE *Sold Separately

*Sold Separately





