

# ALP-30R


## RECESSED BEVELED LED LUMINAIRE

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

**ALP-30R** is an Architectural Grade, LED recessed luminaire designed for recessed applications. Made from high-quality aluminum, this extrusion provides superior thermal management for higher wattage LED strips prolonging the overall lifespan of the lighting system. Manufactured with a patented frosted diffuser for maximum lumen output and a wider beam distribution.

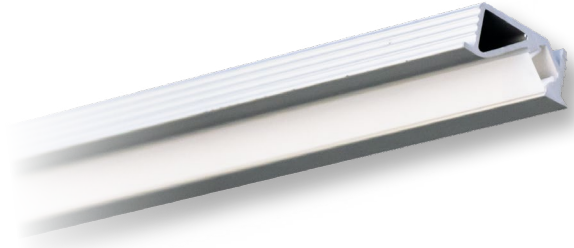

### SPECIFICATIONS

TYPE	Recessed
INPUT VOLTAGE	24V
WATTAGE	3W
LUMEN OUTPUT	Up to 277 Lm/ Ft.
COLOR TEMPERATURE	27K/ 30K/ 35K/ 40K
LENS OPTION	Frosted
AVAILABLE LENGTHS	49 in./ 84 in./ 98 in.
DIMMING	MLV, ELV, 0-10 and TRIAC
FINISH	White/ Black/ Silver
TRANSFORMER	Remote
CHANNEL	ALP-30R
LENS (INCLUDED)	ALP-30R-LN
END CAP	ALP-30R-EC
END CAP (W/ HOLE)	ALP-30R-ECH

### FEATURES

- Field Cuttable
- Suitable for interior and decorative applications
- Various installation methods
- Frosted Lens diffuser included
- Dissipates heat from LED, prolonging its lifetime

\* Remote mounted power supply sold separately.




MODEL	LENGTH	COLOR TEMP	LENS	FINISH	DRIVER
ALP-30R	<b>49</b> 49 in.	<b>27K</b> 2700K	FR Frosted Lens	<b>WH</b> White	See Page 3-4 for compatible drivers.
	<b>84</b> 84 in.	<b>30K</b> 3000K		<b>BK</b> Black	
	<b>98</b> 98 in.	<b>35K</b> 3500K		<b>SI</b> Silver	
	<b>XX</b> Custom Length	<b>40K</b> 4000K			

\* Frosted Lens  
included

# ALP-30R

## RECESSED BEVELED LED LUMINAIRE

### DIMENSIONS

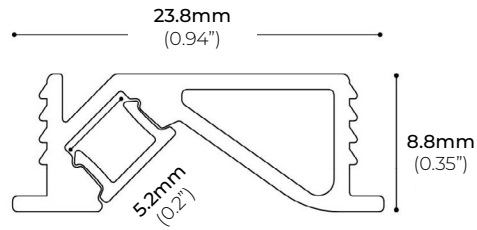

### LUMENS

MODEL	LENS	WATTS	COLOR TEMP	LUMEN/ FT.
ALP-30R	FR (FROSTED)	3W	2700K	240 LM/ FT.
			3000K	258 LM/ FT.
			3500K	270 LM/ FT.
			4000K	277 LM/ FT.

### ACCESSORIES

#### ALP-30R-EC

##### END CAP

23.8mm x 14mm x 8.8mm (0.94" x 0.55" x 0.35")



#### ALP-30R-ECH

##### END CAP WITH HOLE

23.8mm x 14mm x 8.8mm (0.94" x 0.55" x 0.35")




# ALP-30R

## RECESSED BEVELED LED LUMINAIRE

### COMPATIBLE DRIVERS


#### PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.03"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.03"
PSDL-96W-24V	CLASS 2	8.67" X 3.67" X 1.62"
PSDL-150W-24V		8.67" X 3.67" X 1.62"
PSDL-192W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

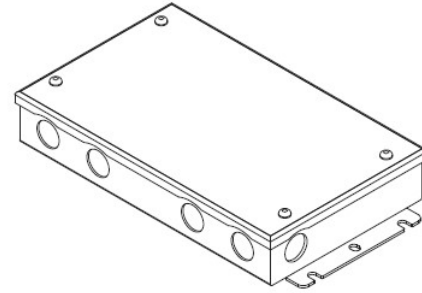


#### PSDH SERIES HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

PSDH-48W-24V	CLASS 2	11.25" X 3.37" X 3.25"
PSDH-96W-24V	CLASS 2	11.25" X 3.37" X 3.25"
PSDH-288W-24V	CLASS 2	14.25" X 8.43" X 4.43"

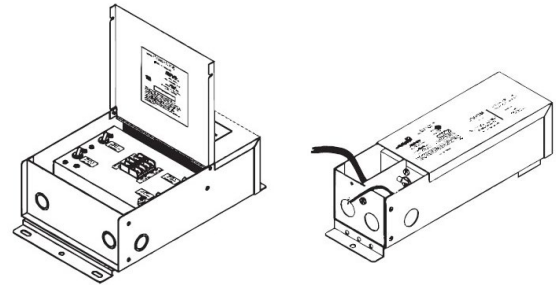


#### PSRX SERIES 4-IN-1 DIMMING DRIVER

PSRX-30W-24V	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V		10.24" X 4.13" X 1.77"
PSRX-192W-24V	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V		10.24" X 4.13" X 1.77"
PSRX-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V		10.94" X 4.33" X 1.77"

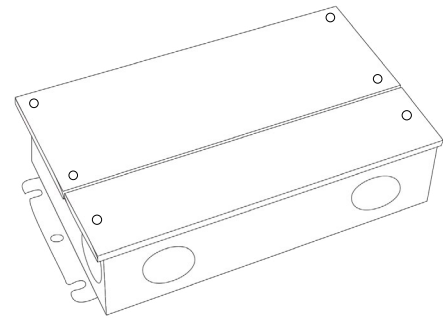

#### PSVT SERIES 0-10V DIMMING DRIVER

PSVT-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSVT-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSVT-200W-24V		10.24" X 4.13" X 1.77"
PSVT-288W-24V	CLASS 2	11.85" X 4.25" X 1.81"
PSVT-300W-24V		10.94" X 4.33" X 1.77"

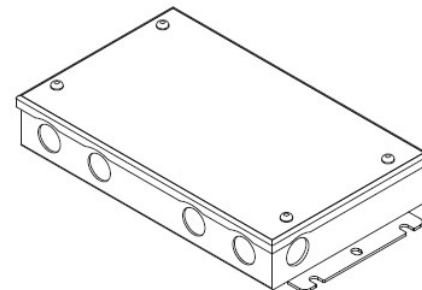


# ALP-30R

## RECESSED BEVELED LED LUMINAIRE

### COMPATIBLE DRIVERS


PSDE SERIES  
0-10V DIMMING W/ JUNCTION BOX

PSDE-60W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"
PSDE-96W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"

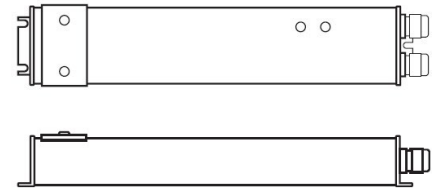


LUTRON 1%  
2 OR 3-WIRE DIMMING

LTEA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"

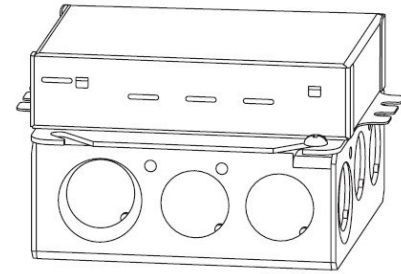

LUTRON 1%

PSDE-96W-24V-ECO	CLASS 2	10.5" X 3.0" X 2.0"
------------------	---------	---------------------



### COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES  
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

