


## INSTALLATION GUIDE



### DIMENSIONS

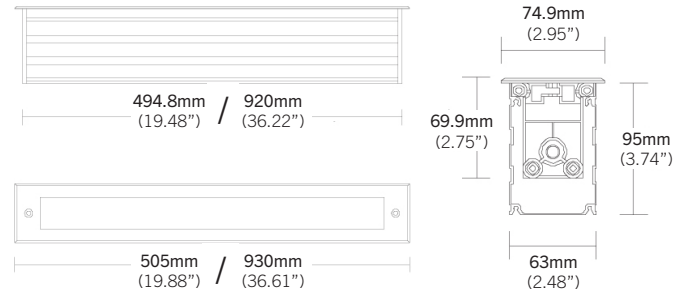

## PRE-INSTALLATION

### Recessed Mount

Disconnect power source prior to installation.

- It is recommended to provide a gravel bed (20cm thick) beneath the casing to prevent corrosion.
- Install when weather is dry.

### SAFETY

Read all instructions before installation.

Do not look directly into light.

Do not submerge in water.

Do not install within 10 ft or less from the nearest edge of a pool, spa, fountain, or similar location

- Product should be installed by a qualified electrician.
- Product should be installed in accordance with these instructions and current electrical codes.
- Product is 120V.
- Not recommended to be installed on the beach and corrosive chemical areas to avoid corrosion and damage.
- Must be installed with CORE Lighting Drivers

## INSTALLATION

- |        |   |
|--------|---|
| STEP 1 | Loosen the two screws on the top of the fixture and remove fixture from the housing. (Figure 1)   |
| STEP 2 | Feed the ground cable through the housing and insert the housing into the prepared recess.  |
| STEP 3 | Wire accordingly and secure connections tightly. (Figure 2)<br>* Live Conductor with "Clamp L"<br>* Neutral Conductor with "Clamp N"<br>* Protective Conductor with "Earth Clamp" |
| STEP 4 | Insert fixture into the casing and ensure a secure fit. (Figure 3)  |

