


ECHO 300 SERIES

2.3" ARCHITECTURAL LED LIGHTING SYSTEM

The **Echo 300 Series** is a linear, architectural lighting solution ideal for installations with continuous runs. Featuring a 2.3-inch aperture, this streamline lighting fixture offers powerful lighting uniformity while seamlessly blending with contemporary and modern spaces.

Project _____
Location _____
Quote/ Ref # _____

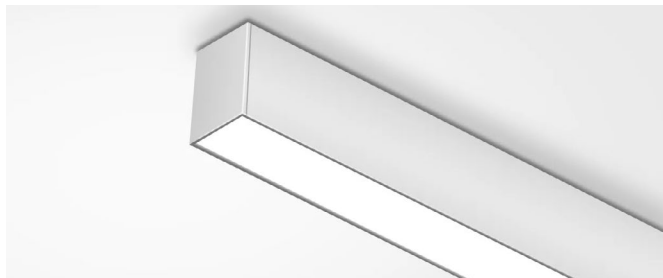

SPECIFICATIONS

TYPE	Surface Suspension Wall
INPUT VOLTAGE	100-277 VAC
APERTURE	2.3 in.
POWER CONSUMPTION	5W/ Ft. 7.5W/ Ft. 10W/ Ft.
LUMEN OUTPUT	Up to 1150 Lm/ Ft. (up/down lighting)
CRI	85+
COLOR TEMPERATURE	Selectable (30K/ 35K/ 40K)
DIMMING	0-10V (12%-100%)
AMBIENT TEMPERATURE	-4°F (-20°C) to 104°F (40°C)
DRIVER	Internal
AVAILABLE LENGTHS	2 Ft./ 3 Ft./ 4 Ft./ 8 Ft.
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs.
WARRANTY	5 Years

FEATURES

- Up to 1150 Lm/ Ft.
- Color Temperature selectable from 30K, 35K, 40K
- Selectable Wattage (50%, 75%, 100%)
- Superior Color Rendering Index (CRI)
- 40 Ft. Continuous Lens
- Multiple mounting options
- T-Grid compatible suspended mount
- UL Listed, Damp Rated
- 5-Year Limited Warranty

LUMENS

SURFACE MOUNT			
LENS	5W (LM/FT)	7.5W (LM/FT)	10W (LM/FT)
FROSTED	500	750	1000
LOUVER	350	525	700
MICRO REFLECTOR	450	675	900
REGRESSED	400	600	800

SUSPENDED/WALL MOUNT			
LENS	5W (LM/FT)	7.5W (LM/FT)	10W (LM/FT)
FROSTED	575	860	1150
LOUVER	450	675	900
MICRO REFLECTOR	575	860	1150
REGRESSED	475	710	950




MODEL	MOUNTING	LENGTH		LENS		FINISH	DIMMING	ACCESSORIES
ECH-S300	SM Surface Mount	2 2 Ft.	4 4 Ft.	FR Frosted	RG Regressed	WH White	D10 0-10V	EMEG Remote Emergency Battery
	PM* Suspended Mount	3 3 Ft.	8 8 Ft.	LV Louver	WW* Wall Washer (30° Tilt)	BK Black		OCS Occupancy Sensor
	WM Wall Mount			MR* Micro Reflector		SI* Silver		
						CU Custom		
	* 10ft. Suspension Cable included			* Not available for Wall Mount		* Wall Mount only		For additional accessories, see page 5


ECHO 300 SERIES

2.3" ARCHITECTURAL LED LIGHTING SYSTEM




DIMENSIONS




23.7" (Frosted/ Regressed) | 23.82" (Micro Reflector/ Louver)



35.71" (Frosted/ Regressed) | 35.63" (Micro Reflector/ Louver)

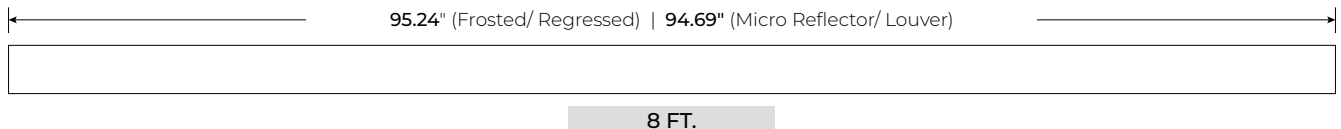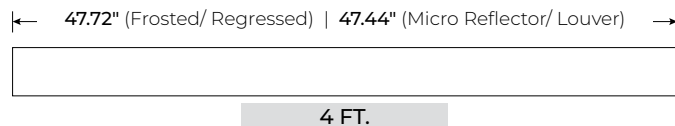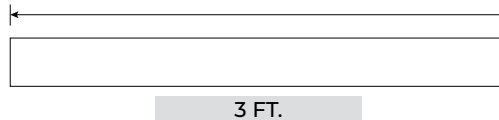

PRODUCT OVERVIEW

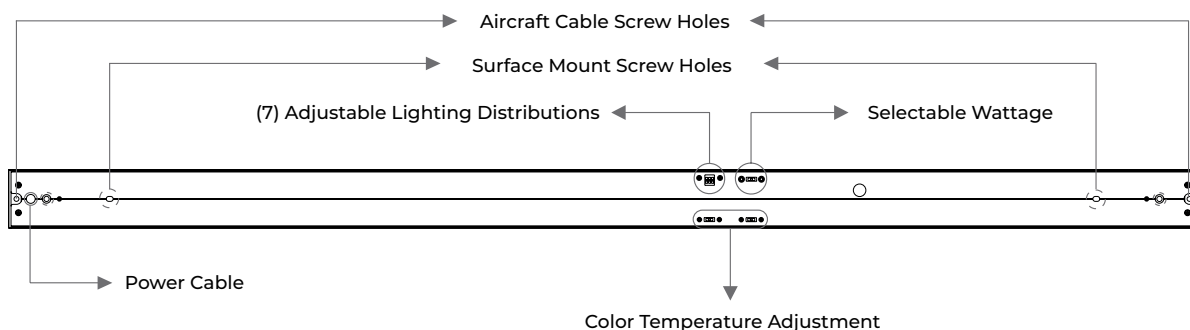


ECHO 300 SERIES


2.3" ARCHITECTURAL LED LIGHTING SYSTEM

LENS OPTIONS


FR
FROSTED



LV
LOUVER




RG
REGRESSED




MR
MICRO REFLECTOR

*Only available for Surface and Suspended Mount



WW
WALL WASHER

*Only available for Surface and Suspended Mount

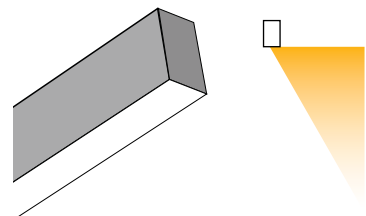

ECHO 300 SERIES

2.3" ARCHITECTURAL LED LIGHTING SYSTEM


SUSPENSION KIT ACCESSORIES

* Suspension kit accessories include a 10ft. suspension cable.

POWER FEED KIT

ALP-CF-WH
WHITE POWER FEED KIT


ALP-CF-BK
BLACK POWER FEED KIT

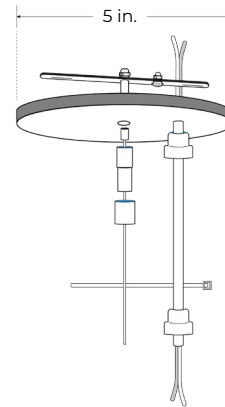

2" NON-POWER FEED KIT

ALP-CSB-WH-2
2" WHITE FEED KIT


ALP-CSB-BK-2
2" BLACK FEED KIT



5" NON-POWER FEED KIT

ALP-CSB-WH-5
5" WHITE FEED KIT

ALP-CSB-BK-5
5" BLACK FEED KIT




ECHO 300 SERIES

2.3" ARCHITECTURAL LED LIGHTING SYSTEM

OPTIONAL ACCESSORIES

ECH-S300-ST STRAIGHT JOINER


*Sold Separately

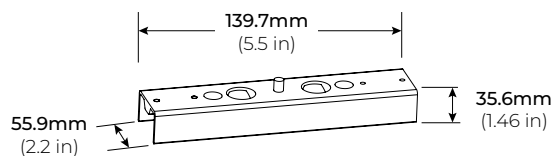

ECH-S300-TLJ "T-SHAPED" LINE JOINER

*Sold Separately


*Only available for Surface and Suspended Mount

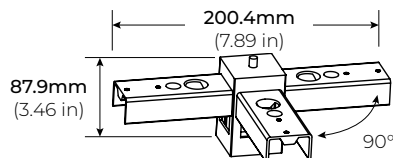

ECH-S300-LJ9 "L-SHAPED" LINE JOINER

*Sold Separately


*Only available for Surface and Suspended Mount



ECH-S300-XLJ "X-SHAPED" LINE JOINER

*Sold Separately


*Only available for Surface and Suspended Mount

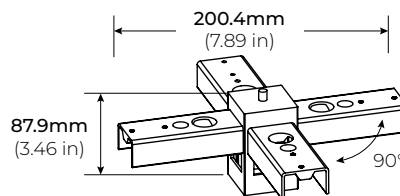

ECH-S300-YLJ "Y-SHAPED" LINE JOINER

*Sold Separately


*Only available for Surface and Suspended Mount

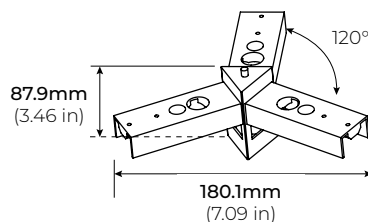

ECH-S300-VLJ "V-SHAPED" LINE JOINER

*Sold Separately

*Only available for Surface and Suspended Mount

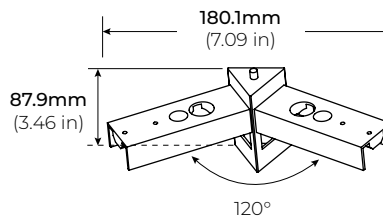

ECHO 300 SERIES

2.3" ARCHITECTURAL LED LIGHTING SYSTEM

EMERGENCY LED BATTERY (EMEG)

When AC power fails, the Emergency LED Driver (EM) immediately switches to emergency mode; operating for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to charging mode.

* One Emergency Battery Per Driver required.



LUMINAIRE LOAD POWER	60W (MAX.)
FIXTURE EFFICACY	110 Lm/W
STANDBY POWER	< 0.4W
EMERGENCY OPERATION	90 Minutes
OPERATING TEMPERATURE	0°F (0°C) ~ 122°F (50°C)
BATTERY	Lithium
RECHARGE	24 Hrs.
CERTIFICATIONS	UL Listed, CEC
DIMENSIONS	12.76" x 2.13" x 1.57" (LxWxH)

INPUT	
INPUT CURRENT (MAX.)	70 MA
INPUT POWER (MAX.)	3.2W
INPUT VOLTAGE RANGE	100-277V AC, 50-60Hz

OUTPUT	
OUTPUT VOLTAGE	170V DC
OUTPUT WATTAGE	8W
OUTPUT POWER	880 Lm (8W)



DIMENSIONS

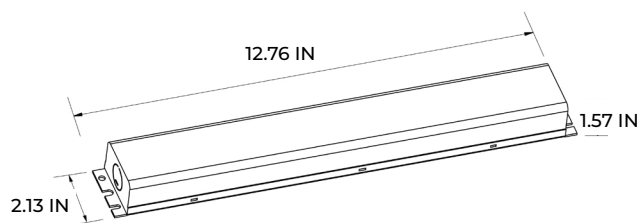

REMOTE