


# CORA DIRECT/ INDIRECT

## DIRECT/ INDIRECT LINEAR LED WALL MOUNT

Project \_\_\_\_\_  
Location \_\_\_\_\_  
Quote/ Ref # \_\_\_\_\_

**CORA DIRECT/ INDIRECT** is an architectural LED luminaire with direct/ indirect light distributions. Offered in three lumen output options up to 704 lumens per foot, and frosted lens to eliminate any hotspots for a uniform beam of light. Manufactured from extruded aluminum with three standard powder-coated color options makes this low profile luminaire ideal for retail, office, school or commercial applications.

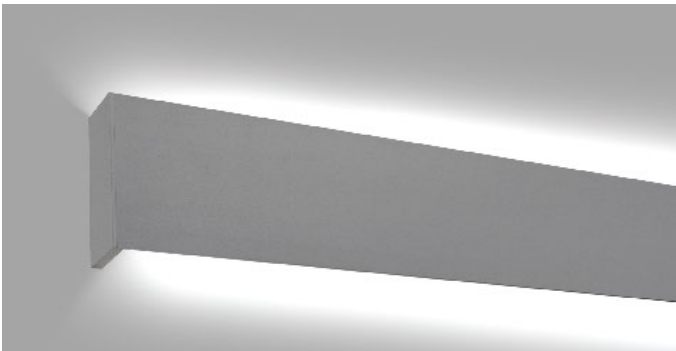

### SPECIFICATIONS

|                     |                                   |
|---------------------|-----------------------------------|
| INPUT VOLTAGE       | 24V                               |
| POWER CONSUMPTION   | 4W/ 5.5W/ 7W                      |
| LUMEN OUTPUT        | 704 Lm/ Ft. (30K)                 |
| BEAM ANGLE          | 180° (Downlight)   180° (Uplight) |
| COLOR TEMPERATURE   | 27K/ 30K/ 35K/ 40K/ 50K/ 65K      |
| MAX RUN             | Linkable up to 32 ft.             |
| CRI                 | 90                                |
| DIMMING             | ELV, 0-10V, DALI and DMX          |
| HOUSING             | Extruded Aluminum                 |
| AMBIENT TEMPERATURE | -4° (-20°C) to 122° (50°C)        |
| ENVIRONMENT         | Dry/ Damp Locations               |
| CERTIFICATIONS      | UL Listed                         |
| LUMEN MAINTENANCE   | 50,000 Hrs.                       |
| WARRANTY            | 5-Year Limited                    |

### FEATURES

- Wall Mounted Luminaire
- Quick and Easy Installation
- Multiple CCT options available
- UL Listed (US and Canada)

### LUMENS

| CCT | WATTS<br>(W/ FT.) | LM/FT<br>(3000K) |
|-----|-------------------|------------------|
| L1  | 4W                | 440              |
| L2  | 5.5W              | 529              |
| L3  | 7W                | 704              |




| MODEL | LENGTH              | DOWNLIGHT   | UPLIGHT     | COLOR TEMP   | FINISH             | DIMMING               |
|-------|---------------------|-------------|-------------|--------------|--------------------|-----------------------|
| CORA  | 4<br>48"            | DL1<br>4W   | UL1<br>4W   | 27K<br>2700K | SI<br>Silver       | ELV<br>ELV Dimming    |
|       | 8<br>96"            | DL2<br>5.5W | UL2<br>5.5W | 30K<br>3000K | CC<br>Custom Color | DIM10<br>0-10 Dimming |
|       | CU<br>Custom Length | DL3<br>7W   | UL3<br>7W   | 35K<br>3500K |                    | DALI<br>DALI Dimming  |
|       |                     |             |             | 40K<br>4000K |                    | DMX<br>DMX            |
|       |                     |             |             | 50K<br>5000K |                    | REM<br>Remote Driver  |
|       |                     |             |             | 65K<br>6500K |                    |                       |


# CORA DIRECT/ INDIRECT

## DIRECT/ INDIRECT LINEAR LED WALL MOUNT

### DIMENSIONS

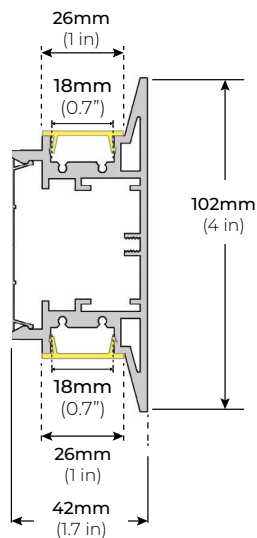

### LIGHT DISTRIBUTION

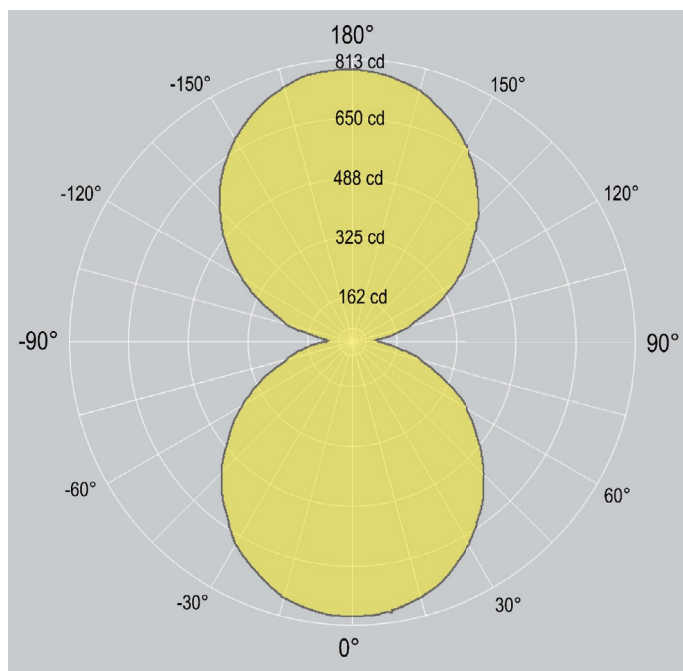

### ACCESSORIES

ALP900-SC  
JOINING CONNECTOR KIT

\*Sold Separately

