### SUSPENDED 330° ROTATING LED WALL WASHER

**Blade Suspension** is a versatile, suspended lighting solution able to rotate up to 330°, ensuring precise light placement. Available in two wattage options and multiple color temperatures, Blade adapts to a variety of lighting needs. Its unique design combines functionality with modern style, making it an ideal choice for both commercial and creative lighting projects.

#### SPECIFICATIONS

INPUT VOLTAGE	120-277V
POWER CONSUMPTION	6W/ Ft.   9W/ Ft.
LUMEN OUTPUT	Up to 960 Lm/ Ft.
COLOR TEMPERATURE	27K/ 30K/ 35K/ 40K/ 50K
MAX RUN	Power Feed every 24 Ft. run
CRI	90+
DIMMING	0-10V, DALI and DMX
DRIVER	Integral
HOUSING	Extruded Aluminum
AMBIENT TEMPERATURE	-4° (-20°C) to 122° (50°C)
ENVIRONMENT	Dry/ Damp Locations
CERTIFICATIONS	ETL Listed
LUMEN MAINTENANCE	50,000 Hrs.
WARRANTY	5-Year Limited

# FEATURES Rotatable Channel up to 330° Integral driver

- Multiple CCT options available
- ETL Listed


#### FEATURES

LIGHT OUTPUT	WATTS (W/ FT.)	LM/ FT
LI	6W	828
L2	9W	960



MODEL	LENGTH	OUTPUT	COLOR TEMP	FINISH	VOLT	DIMMING	OPTIONS
BLDE	2 2 Ft. 3 3 Ft. 4 4 Ft. 6 6 Ft. <b>*8</b> 8 Ft. <b>PF</b> Custom Length *8 = 2 QTY - 4Ft. + 3 cables	L1 6W L2 9W	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	WH White Silver BK Black	UNV 120-277V	ND Non- Dimming 010 0-10V DALI DALI DMX DMX	EMEG Remote Emergency Battery


Project \_\_\_\_\_\_ Location \_\_\_\_\_\_ Quote/ Ref # \_\_\_\_\_\_

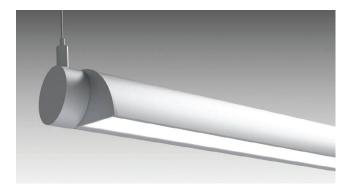



### SUSPENDED 330° ROTATING LED WALL WASHER

#### DIMENSIONS

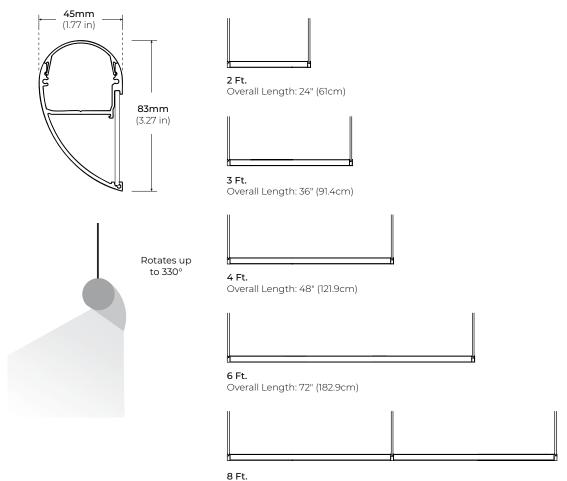

LIGHTING

8 Ft. Multi-Unit Installation



#### SUSPENSION KIT ACCESSORIES

#### POWER FEED KIT

ALP-CF-WH WHITE POWER FEED KIT

ALP-CF-BK BLACK POWER FEED KIT




ALP-CSB-WH-2 2" WHITE FEED KIT


ALP-CSB-BK-2 2" BLACK FEED KIT


#### 5" NON-POWER FEED KIT

ALP-CSB-WH-5 5" WHITE FEED KIT

ALP-CSB-BK-5 5" BLACK FEED KIT







2 in.

0

0





### SUSPENDED 330° ROTATING LED WALL WASHER

#### **EMERGENCY LED BATTERY (EMEG)**

When AC power fails, the Emergency LED Driver (EM) immediately switches to emergency mode; operating for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to charging mode.

#### \* One Emergency Battery Per Driver required.

LUMINAIRE LOAD POWER	60W (MAX.)
FIXTURE EFFICACY	110 Lm/W
STANDBY POWER	< 0.4W
EMERGENCY OPERATION	90 Minutes
OPERATING TEMPERATURE	0°F (0°C) ~ 122°F (50°C)
BATTERY	Lithium
RECHARGE	24 Hrs.
CERTIFICATIONS	UL Listed, CEC
DIMENSIONS	12.76" x 2.13" x 1.57" (LxWxH)

INPUT	
INPUT CURRENT (MAX.)	70 MA
INPUT POWER (MAX.)	3.2W
INPUT VOLTAGE RANGE	100-277V AC, 50-60Hz

OUTPUT	
OUTPUT VOLTAGE	170V DC
OUTPUT WATTAGE	8W
OUTPUT POWER	880 Lm (8W)



#### DIMENSIONS

