

LWW-HO-RGB

HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

Project _____

Location _____

Quote/ Ref # _____

LWW-HO-RGB is a Color-Changing Linear Wall washer that is a powerful LED flood light typically used for building facades, signs or any color-changing wall washing application. Multiple optical lens options provide a variety of lighting solutions. Available in narrow, medium, wide and elliptical optic options and compatible with DMX systems.



SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	15W per Ft.
LUMEN OUTPUT	498 Lm/ Ft.
CRI	90+
COLOR TEMPERATURE	RGB
BEAM ANGLE	10°/ 15°/ 30°/ 15°x40°
DIMMING	DMX
MAX RUN	Linkable up to 12 ft.
OPERATING TEMPERATURE	-40°F TO 122°F (-40°C TO 50°C)
OPERATING TEMPERATURE	-40°F TO 176°F (-40°C TO 80°C)
BEAM ANGLE	15° / 20° / 25° / 50° / 10°x40°
IP RATING	IP65 wet location (outdoor)

FEATURES

- 90+ CRI
- Linkable up to 12Ft.
- Proprietary Optical Technology
- Facade Wall Washing
- Graze Lighting
- Signage




MODEL	COLOR TEMP	LENGTH	OPTICS	OPTIONS
LWW-HO	RGB RGB	12 12" (9W)	10 10°	FMB Fixed Mounting Bracket
		24 24" (18W)	15 15°	STB Standard Tilting Bracket
		48 48" (36W)	30 30°	ETB Extended Tilting Bracket
			15x40 15° x 40°	STK Mounting Stake


LWW-HO-RGB

HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

DIMENSIONS

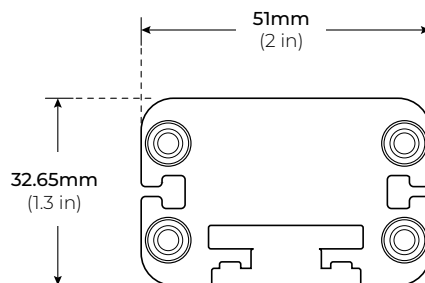


OPTICS

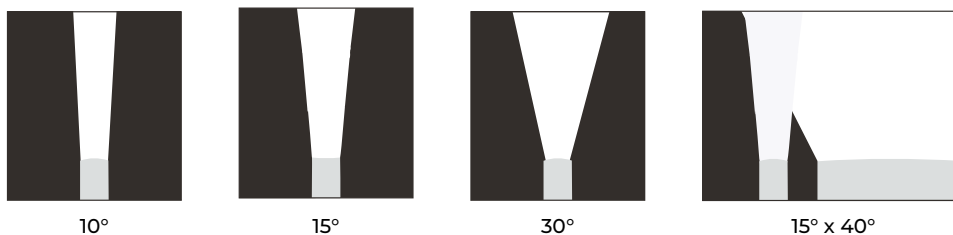


MOUNTING ACCESSORIES


LWW-FMB
FIXED MOUNTING BRACKET
*Sold Separately



LWW-STB
STANDARD TILTING BRACKET
*Included with every Fixture



LWW-ETB
EXTENDED TILTING BRACKET
*Sold Separately



LWW-HO-RGB


CORE
ARCHITECTURAL
LIGHTING

UPDATED: 04.21.25


HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

COMPATIBLE ACCESSORIES



LWW-HO-STK
MOUNTING STAKE

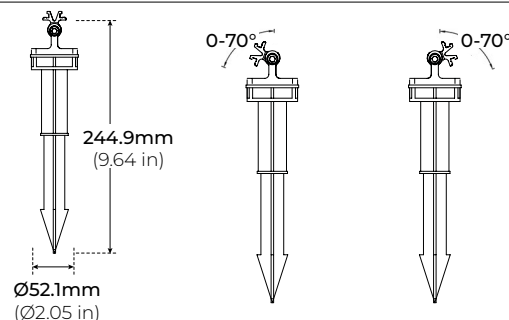



LWW-EC
END CAP
*Sold Separately

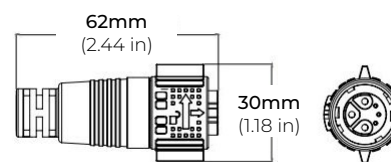

LWW-HO-12-ADLV
LWW-HO-24-ADLV
LWW-HO-36-ADLV
LWW-HO-48-ADLV
12", 24", 36", 48" ASYMMETRIC LOUVER
*Sold Separately



LWW-HO-12-SDLV
LWW-HO-24-SDLV
LWW-HO-36-SDLV
LWW-HO-48-SDLV
12", 24", 36", 48" SYMMETRIC LOUVER
*Sold Separately



LWW-LNK-10-RGB
LWW-LNK-36-RGB
LWW-LNK-72-RGB
10", 36", 72" LINK EXTENSION CABLE
*Sold Separately



LWW-HWC-72-BK
72" HARDWIRE CABLE
*Sold Separately



LWW-HO-RGB


HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

DMX CONTROLLERS

RGB CT600

MULTI-FUNCTION RGBW WALL CONTROLLER


INPUT VOLTAGE	5V DC, 1A
OUTPUT SIGNAL	RF 2.4GHZ + DMX512
CONTROL	4 ZONES
COLOR OPTIONS	Black/ White
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.19"x7.08"x1.38")



RGB-SCW4

WiFi DMX WALL CONTROLLER


INPUT VOLTAGE	5 - 10V DC, 06A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ 8dry contact ports/ Open drain output (for relay)
MEMORY	Built-In Flash
WORKING TEMP	-10°C ~ 45°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



RGB-SDE3

WiFi DMX WALL CONTROLLER

INPUT VOLTAGE	6V DC, 0.6A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC/ Tablet/ Smartphone
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ Ethernet/ RS232/ CLock/ 8dry contact ports/ 5V output relay
MEMORY	MicroSD Card
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")




LWW-HO-RGB

HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

DMX DECODERS


RGB-DMX-4C-RJ45 4-CHANNEL DMX DECODER

INPUT VOLTAGE	12V-24V DC
OUTPUT CURRENT	8A X 4CH
OUTPUT WATTAGE	4 x (96W ~ 288W)
OUTPUT CHANNELS	4
DIMENSIONS	LxWxH (6.5"x2.38"x1.27")

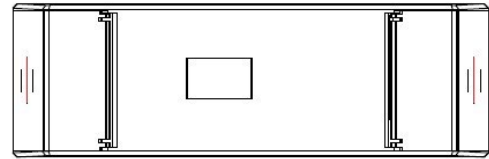

RGB-DMX-5C-XLR 5-CHANNEL DMX DECODER

INPUT VOLTAGE	12V-24V DC
OUTPUT CURRENT	8A X 5CH
OUTPUT WATTAGE	5 x (96W ~ 192W)
OUTPUT CHANNELS	5
DIMENSIONS	LxWxH (6.45"x2.87"x1.5")

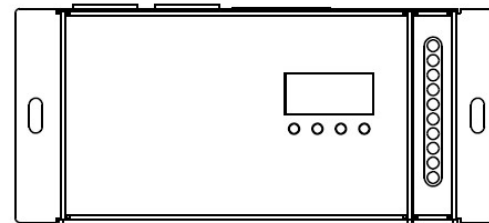

LWW-HO-RGB

HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

NON-DIMMING DRIVERS (COMPATABLE WITH ALL SYSTEMS)

PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

