

SLINQ-40

RECESSED TRIMLESS 360° ROUND NEON SERIES

Project _____
Location _____
Quote/ Ref # _____

Set your creativity free and unleash the endless possibilities with **SLINQ-40** Neon Series. Featuring a 360° light source and recessed trimless mounting options, this flexible neon ensures brilliant illumination from any angle, no matter how it's mounted. Discover what you can create.

SPECIFICATIONS

POWER CONSUMPTION	4.5W/ Ft. (SLQ40-SO) 5.5W/ Ft. (SLQ40-HO)
LUMEN OUTPUT	Up to 399 Lm/ Ft. (SLQ40-SO) Up to 642 Lm/ Ft. (SLQ40-HO)
CRI	90+
COLOR TEMPERATURE	23K/ 27K/ 30K/ 40K
MAXIMUM RUN LENGTH	16 Ft.
OPERATING VOLTAGE	24V
STORAGE TEMPERATURE	0°F (0°C) to 140°F (60°C)
OPERATING TEMPERATURE	-13°F (-25°C) to 131°F (55°C)
BEAM ANGLE	360°
IP RATING	IP65 Outdoor/ Wet Location
LUMEN MAINTENANCE	> 36,000 Hrs.



FEATURES

- 360° Light Source
- Recessed Trimless Options
- Universal Dimming
- IP65 Outdoor Rated
- Factory-Installed Power Feed
- Ideal for Decorative, Retail, Artistic Lighting
- UL Listed (US and Canada)



MODEL	OUTPUT	LENGTH	COLOR TEMP	VOLTAGE	POWER FEED
SLQ40	SO Standard Output (4.5W)	Per Inch Per Inch	23K 2300K	24V 24 Volts	EF72 72" End Feed
	HO High Output (5.5W)		27K 2700K		SF72 72" Side Feed
			30K 3000K		
			40K 4000K		

SLINQ-40


RECESSED TRIMLESS 360° ROUND NEON SERIES

ACCESSORIES

SLQ40-RSM-WH

WHITE RECESSED MOUNT KIT


Ø80MM x 25mm (D x H)



SLQ40-TSM-WH

WHITE TRIMLESS MOUNT KIT

Ø78MM x 25mm (D x H)



CEILING MOUNTING KIT

Ø50MM x 47mm (D x H)

SLQ40-CMK-WH

WHITE CEILING MOUNT KIT

SLQ40-CMK-BK

BLACK CEILING MOUNT KIT

SLQ40-CMK-SI

SILVER CEILING MOUNT KIT



SLQ40-VMC

VISIBLE MOUNTING CLIP


25mm x 59mm x 43.2mm (L x W x H)



SLQ40-PC39

39" MOUNTING CHANNEL

1000mm x 59mm x 43.2mm (L x W x H)



SLQ40-DMB

DISCREET MOUNTING BRACKET


32.2mm x 14.3mm x 4.9mm (L x W x H)




SLINQ-40

RECESSED TRIMLESS 360° ROUND NEON SERIES

DIMENSIONS

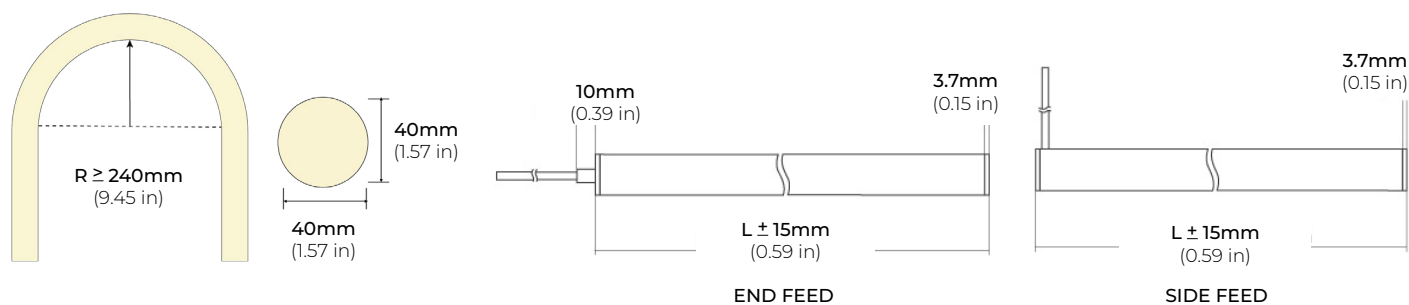

LIGHT DISTRIBUTION

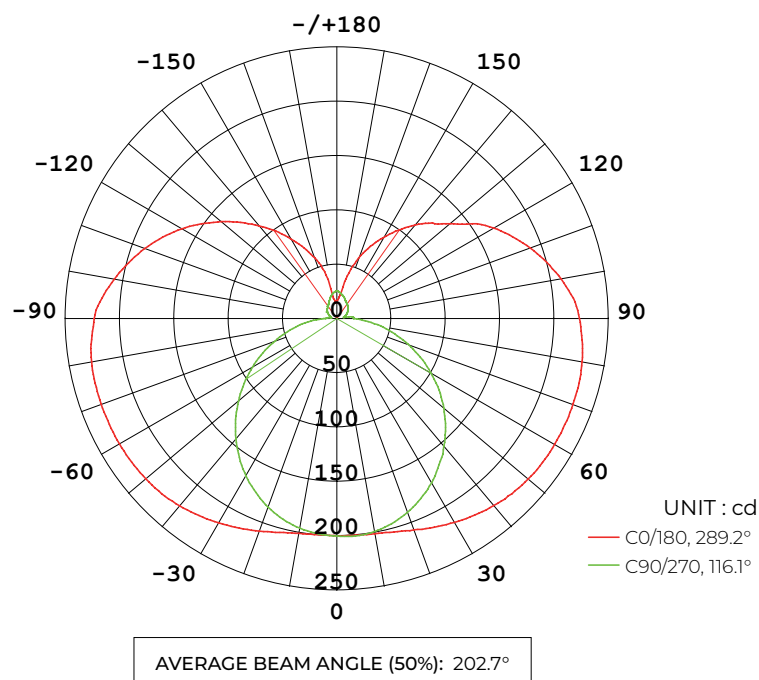


SLINQ-40

RECESSED TRIMLESS 360° ROUND NEON SERIES

COMPATIBLE TRANSFORMERS


PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		10.25" X 4.06" X 1.82"
PSDL-192W-24V	CLASS 2	11" X 4" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

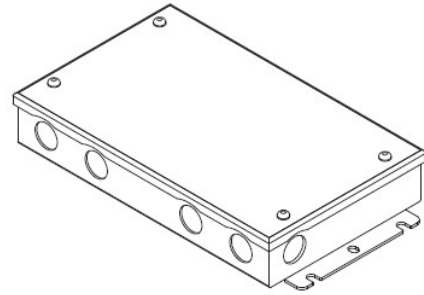


PSDH SERIES HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

PSDH-48W-24V	CLASS 2	11.25" X 3.38" X 3.38"
PSDH-96W-24V	CLASS 2	11.25" X 3.38" X 3.37"
PSDH-288W-24V	CLASS 2	14.25" X 8.43" X 4.43"

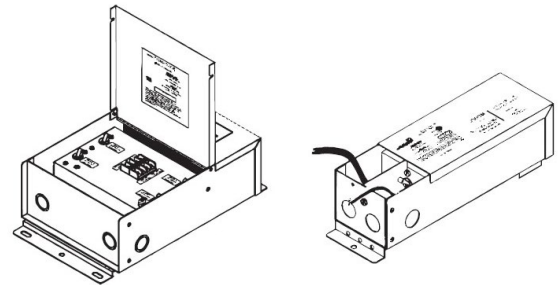


PSRX SERIES 4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-30W-24V-UNV	CLASS 2	6.5" X 3.7" X 1.57"
PSRX-60W-24V-UNV	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V-UNV	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-192W-24V-UNV	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-288W-24V-UNV	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V-UNV		10.94" X 4.33" X 1.77"

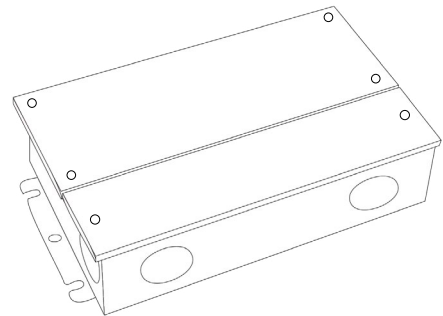

LUTRON 1% 3-WIRE DIMMING

L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
------------------	---------	--------------------

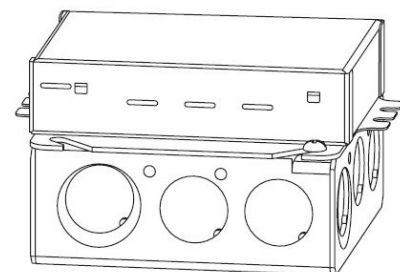


SLINQ-40

RECESSED TRIMLESS 360° ROUND NEON SERIES

COMPATIBLE TRANSFORMERS

LUTRON 1%
3-WIRE DIMMING

PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

