

CORE
ARCHITECTURAL
LIGHTING

4.6W OUTDOOR DIGITAL PIXEL COLOR-CHANGING LED STRIP

Quote/ Ref # _____

[illegible]

LUMENS

CCT	LM/ FT
RGBW (Digital)	227
RGB	142
3000K	85




MODEL	COLOR TEMP	LENGTH	VOLTAGE	PROFILE
LSPW65DX	RGBW30K RGB+3000K	16 16 Ft.	24 24V DC	See Page 2 for compatible profiles.
	RGBW40K RGB+4000K	PF Per Ft.		

LSPW65WDX-RGBW

4.6W OUTDOOR DIGITAL PIXEL COLOR-CHANGING LED STRIP

DIMENSIONS

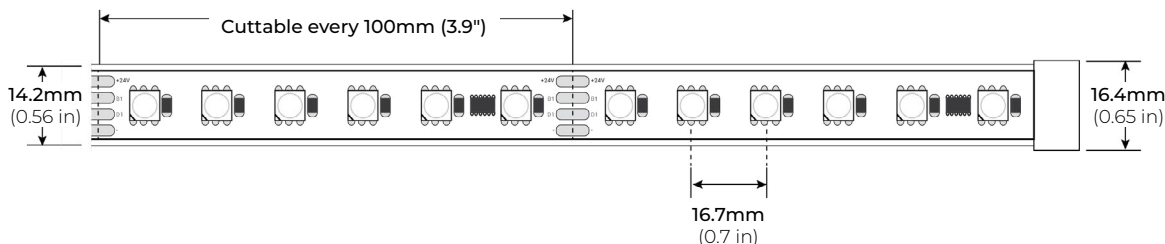


COMPATIBLE ALUMINUM PROFILES

SURFACE PROFILES


ALU-DS100

LENGTHS 39" | 78" | 84"
LENS Clear, Frosted
FINISH Silver




ALP-90

LENGTHS 48" | 96"
LENS Frosted
FINISH Black | Silver




ALP-130

LENGTHS 49" | 84" | 98"
LENS Frosted
FINISH Silver | Black




ALP-140

LENGTHS 48" | 98"
LENS Frosted
FINISH Silver




ALP-160

LENGTHS 49" | 98"
LENS Frosted
FINISH Silver



ALP-190

LENGTHS 48" | 98"
LENS Frosted
FINISH Silver

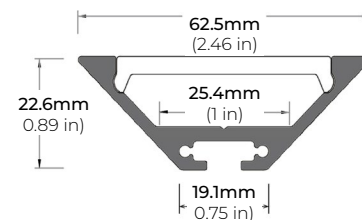


* For more compatible profiles, visit corelightingusa.com

RECESSED PROFILES


ALP-230RN

LENGTHS 49" | 98"
LENS Frosted
FINISH Silver



ALP-330RN

LENGTHS 49" | 98"
LENS Frosted
FINISH Silver



* For more compatible profiles, visit corelightingusa.com

LSPW65WDX-RGBW


4.6W OUTDOOR DIGITAL PIXEL COLOR-CHANGING LED STRIP

DMX CONTROLLERS

RGB-SCW4

WiFi DMX WALL CONTROLLER


INPUT VOLTAGE	5 - 10V DC, 06A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ 8dry contact ports/ Open drain output (for relay)
MEMORY	Built-In Flash
WORKING TEMP	-10°C ~ 45°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



RGB-SDE3

WiFi DMX WALL CONTROLLER

INPUT VOLTAGE	6V DC, 0.6A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC/ Tablet/ Smartphone
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ Ethernet/ RS232/ CLock/ 8dry contact ports/ 5V output relay
MEMORY	MicroSD Card
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")




DMX DECODERS

DMX-SPI-XLR

DIGITAL DMX DECODER

INPUT VOLTAGE	5V-24V DC
INPUT SIGNAL	DMX512 + RF 2.4GHz
OUTPUT SIGNAL	SPI (TTL) x 3
OUTPUT CHANNELS	RGB 510
DIMENSIONS	LxWxH (6.5"x2.8"x1.5")

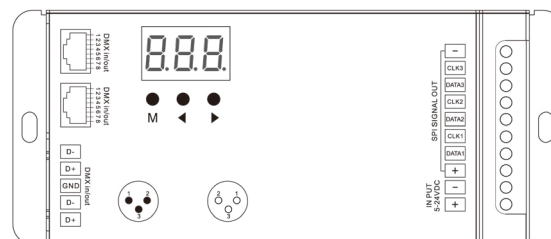

NON-DIMMING DRIVERS (COMPATABLE WITH ALL SYSTEMS)

PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

