BLADE STEM

CORE ARCHITECTURAL LIGHTING

330° ROTATING LED WALL WASHER

Blade Stem is a versatile, wall-mounted lighting solution able to rotate up to 330°, ensuring precise light placement. Available in two wattage options and multiple color temperatures, Blade adapts to a variety of lighting needs. Its unique design combines functionality with modern style, making it an ideal choice for both commercial and creative lighting projects.

Project _____ Location ___ Quote/ Ref # ____



SPECIFICATIONS

INPUT VOLTAGE
120-277V

POWER CONSUMPTION
6W/ Ft. | 9W/ Ft.

LUMEN OUTPUT
Up to 960 Lm/ Ft.

COLOR TEMPERATURE
27K/ 30K/ 35K/ 40K/ 50K

MAX RUN
Power Feed every 24 Ft. run

CRI 90+

DIMMING 0-10V, DALI and DMX

DRIVER Integral

HOUSINGExtruded AluminumAMBIENT TEMPERATURE-4° (-20°C) to 122° (50°C)ENVIRONMENTDry/ Damp Locations

CERTIFICATIONSETL ListedLUMEN MAINTENANCE50,000 Hrs.WARRANTY5-Year Limited

FEATURES

- · Rotatable Channel up to 330°
- · Integral Driver
- · Multiple CCT options available
- · ETL Listed

FEATURES

LIGHT OUTPUT	WATTS (W/ FT.)	LM/ FT	
Lì	6W	828	
L2	9W	960	











MODEL	LENGTH	OUTPUT	COLOR TEMP	STEM	FINISH	VOLT	DIMMING	OPTIONS
MODEL	LENGIA	OUTPUT	COLOR TEMP	SIEM	LINISH	VOLI	DIMINING	OPTIONS
BLDE	2 2 Ft.	L1 6W	27K 2700K	STM6 6" Stem	WH White	UNV 120-277V	ND Non-	EMEG Remote
	3 3 Ft.	L2 9W	30K 3000K	STM12 12" Stem	SI Silver	 	Dimming 010	Emergency Battery
	4 4 Ft.		35K 3500K	STM18 18" Stem	BK Black	 	0-10V DALI	
	5 5 Ft.	 	40K 4000K	STM24 24" Stem	 	 	DALI DMX	
	¦ *6 ı 6 Ft. !	 	50K 5000K	 	 	 	DMX	
	¦ *8 ! 8 Ft.				 	 		
	PF Custom Length						 	
	*6 = 2 QTY - 3Ft. + 3 Wall Stems		1 	1 	1 	1 	1 	
	*8 = 2 QTY - 4Ft. + 3 Wall Stems		 	 	 	 		


BLADE STEM



330° ROTATING LED WALL WASHER

UPDATED: 06.04.2

DIMENSIONS

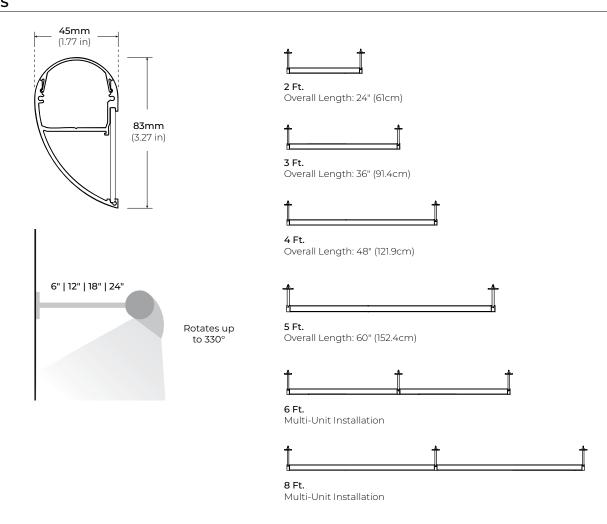

BLADE STEM



330° ROTATING LED WALL WASHER

UPDATED: 06.04.2

EMERGENCY LED BATTERY (EMEG)

When AC power fails, the Emergency LED Driver (EM) immediately switches to emergency mode; operating for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to charging mode.

* One Emergency Battery Per Driver required.

LUMINAIRE LOAD POWER60W (MAX.)FIXTURE EFFICACY110 Lm/WSTANDBY POWER< 0.4W</th>EMERGENCY OPERATION90 Minutes

OPERATING TEMPERATURE 0°F (0°C) ~ 122°F (50°C)

BATTERY Lithium RECHARGE 24 Hrs.

CERTIFICATIONS UL Listed, CEC

DIMENSIONS 12.76" x 2.13" x 1.57" (LxWxH)

INPUT	
INPUT CURRENT (MAX.)	70 MA
INPUT POWER (MAX.)	3.2W
INPUT VOLTAGE RANGE	100-277V AC, 50-60Hz

OUTPUT	
OUTPUT VOLTAGE	170V DC
OUTPUT WATTAGE	8W
OUTPUT POWER	880 Lm (8W)



DIMENSIONS

