



**INSTALLATION GUIDE**

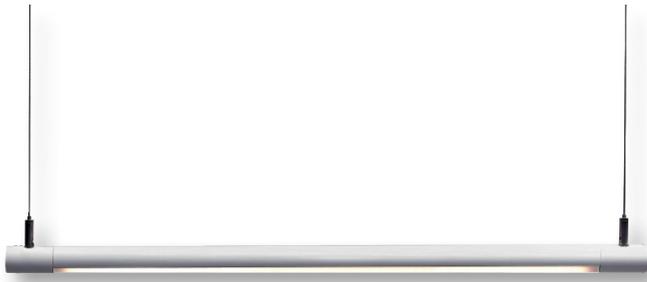

**DIMENSIONS**

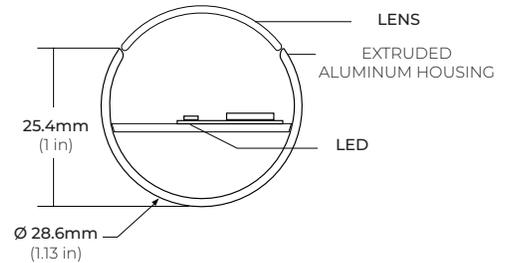

**PRE-INSTALLATION**

**Suspended Mount**

Power input is 24V DC. Confirm the power supply is compatible.

Disconnect power source prior to installation.

**SAFETY**

Read all instructions before installation.





These products may represent a possible shock or fire hazard if improperly installed.

Do not look directly into light.

- Product should be installed by a qualified electrician.
- Product should be installed in accordance with these instructions and current electrical codes.
- Must be installed with CORE Lighting Drivers

**INSTALLATION**

- STEP 1** Using a pencil, mark the ceiling to map out the placement of the fixture.
- STEP 2** Cut a Ø 25mm (1") hole in the ceiling and feed the main power wires through the hole.
- STEP 3** Feed the aircraft cable through the griplock gripper by rotating clockwise to loosen. Continue to feed the wire through until the desired length and rotate counter-clockwise to secure the cable in place. (Figure 1)
- STEP 4** Connect the powerfeed to the main power wire. (Figure 2)
- STEP 5** Using screws, secure the canopy mounting to the ceiling. (Figure 3)  
*\*If necessary, adjust the cable length by repeating step 3.*
- STEP 6** Slide the cover plate up the suspension cable towards the ceiling and secure in place using set screws along the sides. (Figure 4)

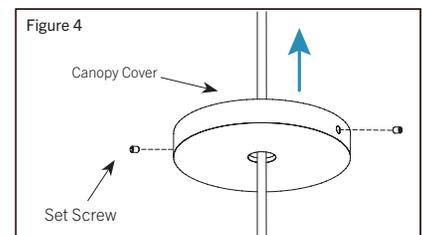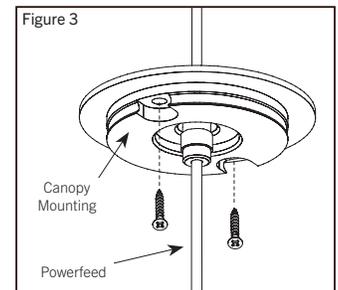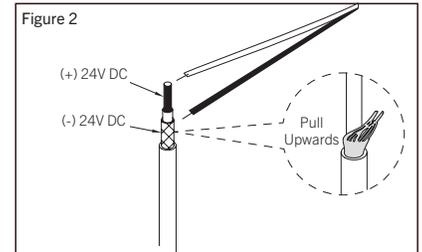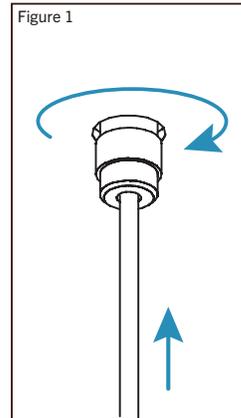


**INSTALLATION (CONT.)**

If only installing one fixture, skip to step 8.


Joining Multiple Fixtures

If connecting multiple fixtures together, screw the light fixture into your connector of choice. Secure in place with set screws. Repeat on the opposite side. (Figure 5)


*\*The LUCA fixture can be linked together up to 20ft. with non-powered connectors. Factory recommends one powered connector every 20ft. See spec sheet for compatible connectors.*

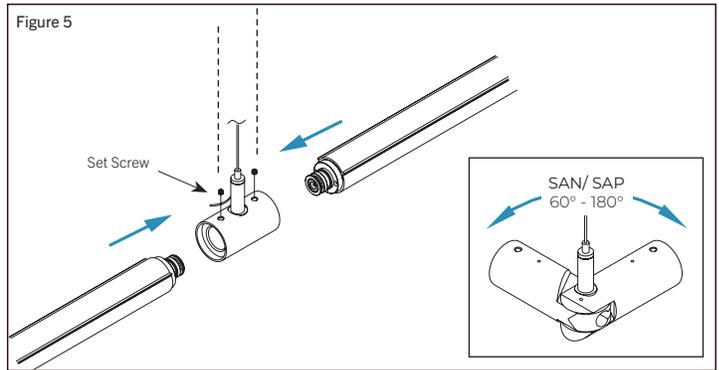


Connect the end support to the end of the fixture. Secure in place with set screws. (Figure 6)

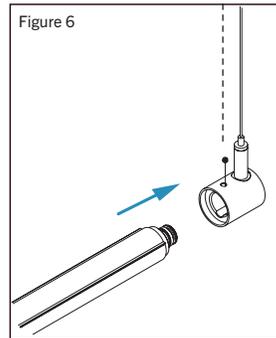

Mount the cable fitting to the ceiling using anchor screws and rotate the cover clockwise to secure the suspension cable in place. (Figure 7)

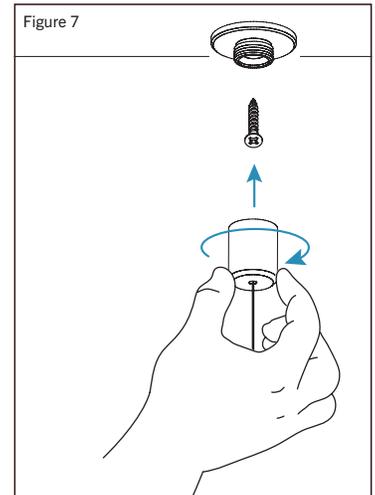

Adjust the height of the luminaire by pressing the gripper nozzle. Pull the cable to the desired length and cut any excess cable with appropriate tools. (Figure 8)

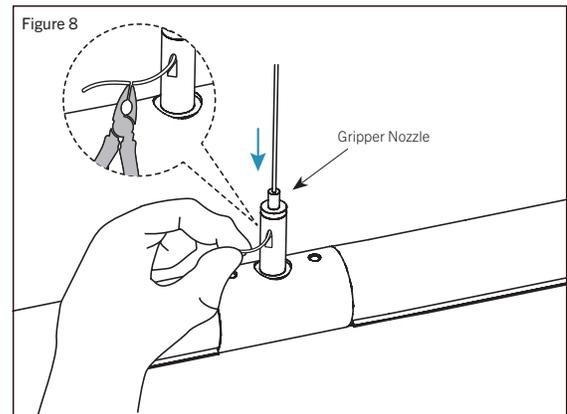

Turn on power to test luminaire functionality.