

IGU-500AD

IN-GROUND LINEAR ADJUSTABLE UPLIGHT

Project _____
Location _____
Quote/ Ref # _____

IGU-500AD is an adjustable in-ground linear uplight featuring multiple beam angle options including long, narrow pattern and assymetric optic. Designed for in-ground/recessed installations in concrete or lawns, this fixture is ideal for wall washing and illuminating ground mounted signs and linear objects.



SPECIFICATIONS

INPUT VOLTAGE	120-277V AC
POWER CONSUMPTION	24.4W/Ft.
LUMEN OUTPUT	70 Lm/ W
COLOR TEMPERATURE	27K / 30K / 35K / 40K / 60K / Red / Green / Blue / Amber / Yellow / RGB / RGBW / RGBA
BEAM ANGLE	8° / 15° / 30° / 45° / 60° / 10° x 40° / 20° x 60° Asymmetric
CRI	80+, 90 (optional, consult factory)
DIMMING	DMX, DALI and Casambi
HOUSING	Extruded Anodized Aluminum
COVER	Tempered Glass
TOP COVER FRAME	Stainless Steel 316
OPERATING TEMPERATURE	-4°F (-20°C) ~ 122°F (50°C)
STORAGE TEMPERATURE	-4°F (-20°C) ~ 140°F (60°C)
IP RATING	IP67
MAX LOAD	1000 lbs (500 kgs)
CERTIFICATIONS	3G Vibration, RoHS, ETL Listed
LUMEN MAINTENANCE	50,000 Hrs.
IMPACT RATING	IK09
WEIGHT	2.89 kg/ ft. (6.37 lbs)

FEATURES

- 120 - 277V AC
- ±15° Tilt Adjustment
- Max load 1000 lbs (500kgs)
- Built-in Driver
- Stainless Steel Frame
- Clear Tempered Glass
- Recessed Housing Included
- 3G Vibration




MODEL	TYPE	LENGTH	COLOR TEMP			OPTIC		FINISH	VOLT	CONTROL	OPTIONS				
IGU500	AD Adjustable	12 12 in. (24.4W)	27K	RD	RGB	8	1040	SS Stainless Steel	UNV 120-277V	NDM No Dimming	OLV Optic Louver				
			30K	GR	RGBW							15	2060		
		20 20 in. (40W)	35K	BL	RGBA	30	ASY					DMX DMX	HC Honeycomb Louver		
		3000K	Green	RGBW	15°									H20° x V60°	
		40 40 in. (80W)	40K	AM	RGBA (Amber)	45	Asymmetric							DALI Dali	MG Micro Grill Shield
		3500K	Blue	RGBA (Amber)	30°										
60K	YL		60	60°	CAS Casambi										
6000K	Yellow														


IGU-500AD

IN-GROUND LINEAR ADJUSTABLE UPLIGHT


DIMENSIONS




NON-DIMMING




DIMMING

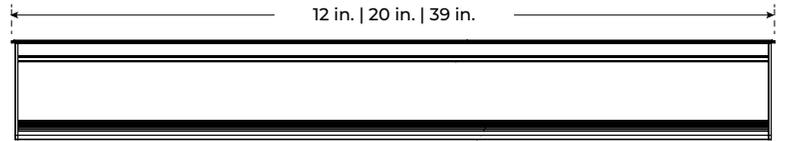


OPTICS




8°




15°




30°




45°




60°



10° x 40°



20° x 60°



ASYMMETRIC

IGU-500AD

IN-GROUND LINEAR ADJUSTABLE UPLIGHT

OPTIONAL ACCESSORIES

IGU500-OLV
OPTIC LOUVER



IGU500-HC
HONEYCOMB LOUVER



IGU500-MG
MICRO GRILL LOUVER



PRODUCT OVERVIEW

