

LWW-HO-RGB


HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

Project _____

Location _____

Quote/ Ref # _____

LWW-HO-RGB is a Color-Changing Linear Wall washer that is a powerful LED flood light typically used for building facades, signs or any color-changing wall washing application. Multiple optical lens options provide a variety of lighting solutions. Available in narrow, medium, wide and elliptical optic options and compatible with DMX systems.

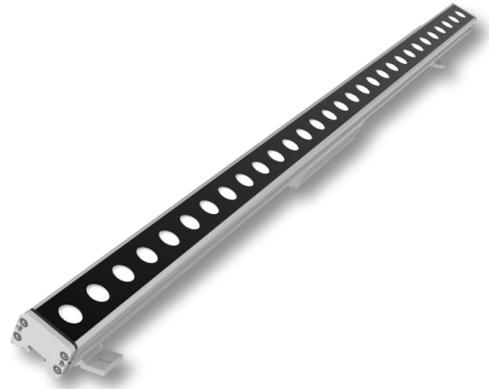

SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	15W per Ft.
LUMEN OUTPUT	498 Lm/ Ft.
CRI	90+
COLOR TEMPERATURE	RGB
BEAM ANGLE	10°/ 15°/ 30°/ 15°x40°
DIMMING	DMX
MAX RUN	Linkable up to 12 ft.
OPERATING TEMPERATURE	-40°F TO 122°F (-40°C TO 50°C)
OPERATING TEMPERATURE	-40°F TO 176°F (-40°C TO 80°C)
BEAM ANGLE	15° / 20° / 25° / 50° / 10°x40°
IP RATING	IP65 wet location (outdoor)

FEATURES

- 90+ CRI
- Linkable up to 12Ft.
- Proprietary Optical Technology
- Facade Wall Washing
- Graze Lighting
- Signage




MODEL	COLOR TEMP	LENGTH	OPTICS	OPTIONS
LWW-HO	RGB RGB	12 12" (9W)	10 10°	FMB Fixed Mounting Bracket
		24 24" (18W)	15 15°	STB Standard Tilting Bracket
		30 30°		ETB Extended Tilting Bracket
		48 48" (36W)	15x40 15° x 40°	STK Mounting Stake
				WMS Small Wall Mount Arms
				WML Large Wall Mount Arms


LWW-HO-RGB

HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

DIMENSIONS

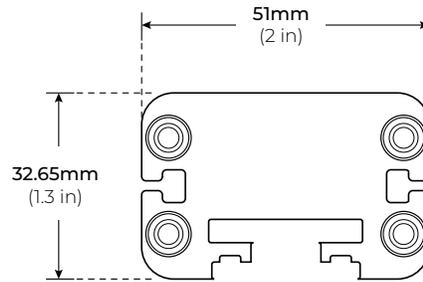


OPTICS

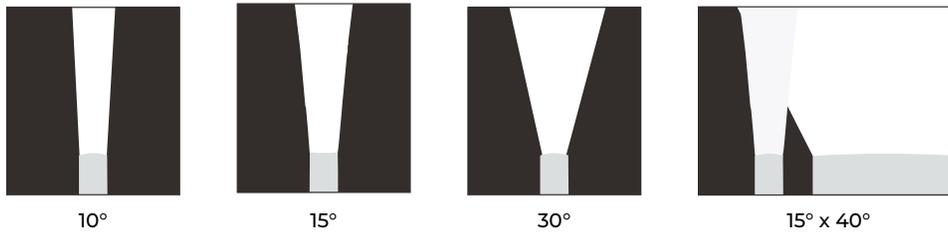


MOUNTING ACCESSORIES


LWW-FMB
FIXED MOUNTING BRACKET
*Sold Separately



LWW-STB
STANDARD TILTING BRACKET
*Included with every Fixture



LWW-ETB
EXTENDED TILTING BRACKET
*Sold Separately




LWW-HO-RGB

HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

MOUNTING ACCESSORIES


LWW-HO-STK
MOUNTING STAKE

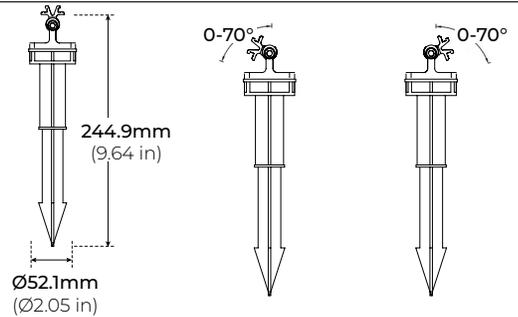

LWW-WMS
SMALL WALL MOUNT ARM (6-9")
*Sold Separately



Adjustable Length Wall to Fixture

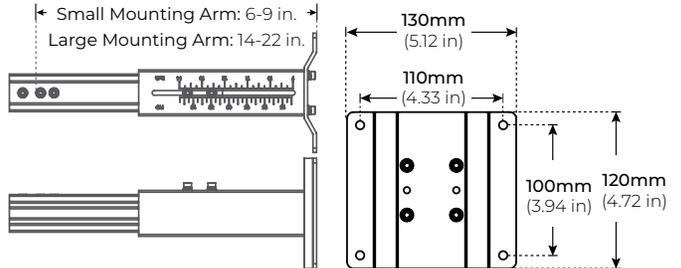


LWW-WML
LARGE WALL MOUNT ARM (14-22")
*Sold Separately



COMPATIBLE ACCESSORIES

LWW-EC
END CAP
*Sold Separately


*One end cap required per run length

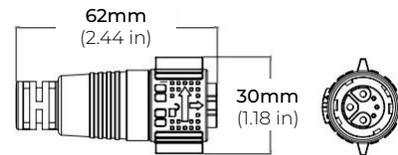

LWW-HO-12-ADLV
LWW-HO-24-ADLV
LWW-HO-36-ADLV
LWW-HO-48-ADLV
12", 24", 36", 48" ASYMMETRIC LOUVER
*Sold Separately



LWW-HO-12-SDLV
LWW-HO-24-SDLV
LWW-HO-36-SDLV
LWW-HO-48-SDLV
12", 24", 36", 48" SYMMETRIC LOUVER
*Sold Separately



LWW-HO-RGB

HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

COMPATIBLE ACCESSORIES

LWW-LNK-10-RGB
LWW-LNK-36-RGB
LWW-LNK-72-RGB
10", 36", 72" LINK EXTENSION CABLE
*Sold Separately



LWW-HWC-72-BK
72" HARDWIRE CABLE
*Sold Separately



LWW-HO-RGB


HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

DMX CONTROLLERS

All DMX Controllers require a DMX Decoder and Non-Dimming Driver.
Please refer for page 6 and 7 for compatible options.


RGB CT600 MULTI-FUNCTION RGBW WALL CONTROLLER

INPUT VOLTAGE	5V DC, 1A
OUTPUT SIGNAL	RF 2.4GHZ + DMX512
CONTROL	4 ZONES
COLOR OPTIONS	Black/ White
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.19"x7.08"x1.38")




RGB-SCW4 WiFi DMX WALL CONTROLLER

INPUT VOLTAGE	5 - 10V DC, 06A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ 8dry contact ports/ Open drain output (for relay)
MEMORY	Built-In Flash
WORKING TEMP	-10°C ~ 45°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



RGB-SDE3 WiFi DMX WALL CONTROLLER

INPUT VOLTAGE	6V DC, 0,6A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC/ Tablet/ Smartphone
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ Ethernet/ RS232/ CLock/ 8dry contact ports/ 5V output relay
MEMORY	MicroSD Card
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



LWW-HO-RGB


HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

DMX DECODERS

All DMX Decoders require a DMX Controller and Non-Dimming Driver.
Please refer for page 5 and 7 for compatible options.


RGB-DMX-4C-RJ45 4-CHANNEL DMX DECODER

INPUT VOLTAGE 12V-24V DC
OUTPUT CURRENT 8A X 4CH
OUTPUT WATTAGE 4 x (96W ~ 288W)
OUTPUT CHANNELS 4
DIMENSIONS LxWxH (6.5"x2.38"x1.27")

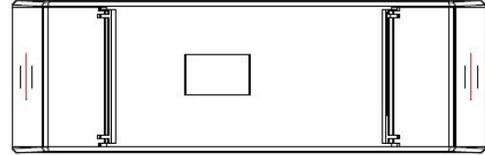

RGB-DMX-5C-XLR 5-CHANNEL DMX DECODER

INPUT VOLTAGE 12V-24V DC
OUTPUT CURRENT 8A X 5CH
OUTPUT WATTAGE 5 x (96W ~ 192W)
OUTPUT CHANNELS 5
DIMENSIONS LxWxH (6.45"x2.87"x1.5")

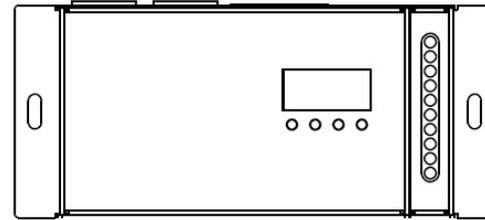

LWW-HO-RGB

HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

NON-DIMMING DRIVERS (COMPATABLE WITH ALL SYSTEMS)

PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

