

# SLINQ-40

## RECESSED TRIMLESS 360° ROUND NEON SERIES

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

Set your creativity free and unleash the endless possibilities with **SLINQ-40** Neon Series. Featuring a 360° light source and recessed trimless mounting options, this flexible neon ensures brilliant illumination from any angle, no matter how it's mounted. Discover what you can create.



### SPECIFICATIONS

<b>POWER CONSUMPTION</b>	4.5W/ Ft. (SLQ40-SO) 5.5W/ Ft. (SLQ40-HO)
<b>LUMEN OUTPUT</b>	Up to 399 Lm/ Ft. (SLQ40-SO) Up to 642 Lm/ Ft. (SLQ40-HO)
<b>CRI</b>	90+
<b>COLOR TEMPERATURE</b>	23K/ 27K/ 30K/ 40K
<b>MAXIMUM RUN LENGTH</b>	16 Ft.
<b>OPERATING VOLTAGE</b>	24V
<b>STORAGE TEMPERATURE</b>	0°F (0°C) to 140°F (60°C)
<b>OPERATING TEMPERATURE</b>	-13°F (-25°C) to 131°F (55°C)
<b>BEAM ANGLE</b>	360°
<b>IP RATING</b>	IP65 Outdoor/ Wet Location
<b>LUMEN MAINTENANCE</b>	> 36,000 Hrs.

### FEATURES

- 360° Light Source
- Recessed Trimless Options
- Universal Dimming
- IP65 Outdoor Rated
- Factory-Installed Power Feed
- Ideal for Decorative, Retail, Artistic Lighting
- UL Listed (US and Canada)

\*This product is factory-cut only. Do not field modify.



MODEL	OUTPUT	COLOR TEMP	LENGTH	VOLTAGE	POWER FEED
SLQ40-FX	<b>SO</b> Standard Output (4.5W)	<b>23K</b> 2300K	<b>1PF</b> Per Foot	<b>24V</b> 24 Volts	<b>EF72</b> 72" End Feed
		<b>27K</b> 2700K			
	<b>HO</b> High Output (5.5W)	<b>30K</b> 3000K			
		<b>40K</b> 4000K			
			*1 = Custom length per FT. (SO - Every 1.64") (HO - Every 1.97")		

# SLIQ-40

## RECESSED TRIMLESS 360° ROUND NEON SERIES

### ACCESSORIES

---

**SLQ40-RSM-WH**  
WHITE RECESSED MOUNT KIT  
Ø80MM x 25mm (D x H)



**SLQ40-TSM-WH**  
WHITE TRIMLESS MOUNT KIT  
Ø78MM x 25mm (D x H)



### CEILING MOUNTING KIT

---

Ø50MM x 47mm (D x H)

**SLQ40-CMK-WH**  
WHITE CEILING MOUNT KIT

**SLQ40-CMK-BK**  
BLACK CEILING MOUNT KIT

**SLQ40-CMK-SI**  
SILVER CEILING MOUNT KIT



**SLQ40-VMC**  
VISIBLE MOUNTING CLIP  
25mm x 59mm x 43.2mm (L x W x H)



**SLQ40-PC39**  
39" MOUNTING CHANNEL  
1000mm x 59mm x 43.2mm (L x W x H)




**SLQ40-DMB**  
DISCREET MOUNTING BRACKET  
32.2mm x 14.3mm x 4.9mm (L x W x H)




# SLINQ-40

## RECESSED TRIMLESS 360° ROUND NEON SERIES

### DIMENSIONS

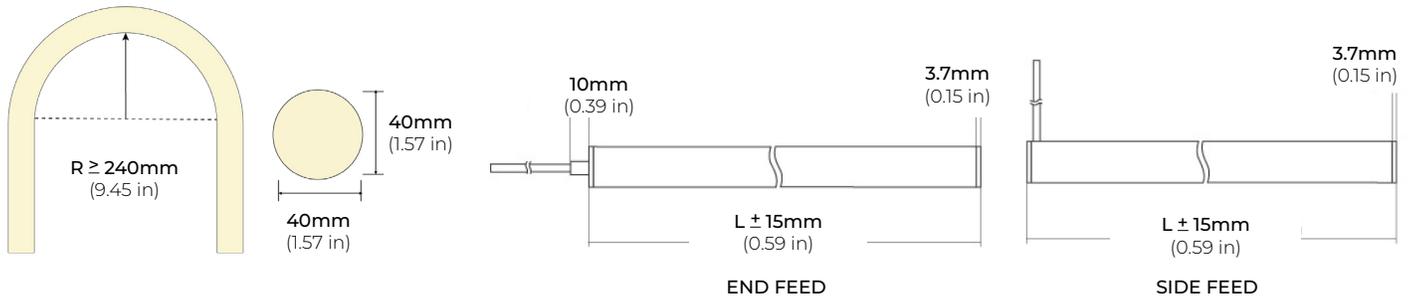

### LIGHT DISTRIBUTION

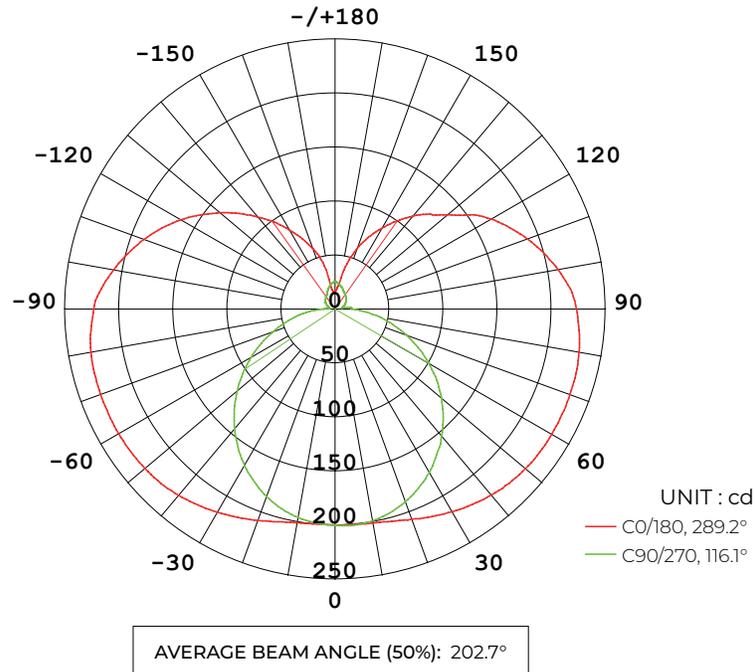


# SLINQ-40

## RECESSED TRIMLESS 360° ROUND NEON SERIES

### COMPATIBLE TRANSFORMERS


#### PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		10.25" X 4.06" X 1.82"
PSDL-192W-24V	CLASS 2	11" X 4" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

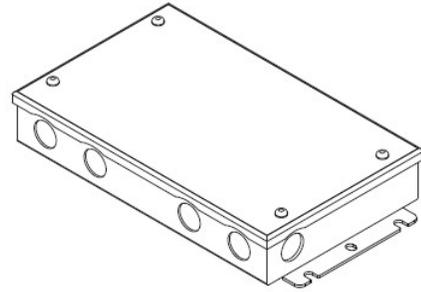


#### PSDH SERIES HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

PSDH-48W-24V	CLASS 2	11.25" X 3.38" X 3.38"
PSDH-96W-24V	CLASS 2	11.25" X 3.38" X 3.37"
PSDH-288W-24V	CLASS 2	14.25" X 8.43" X 4.43"

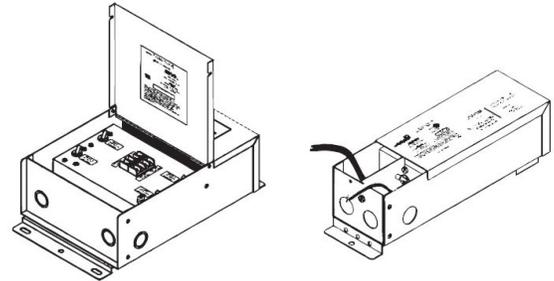


#### PSRX SERIES 4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-30W-24V-UNV	CLASS 2	6.5" X 3.7" X 1.57"
PSRX-60W-24V-UNV	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V-UNV	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-192W-24V-UNV	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-288W-24V-UNV	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V-UNV		10.94" X 4.33" X 1.77"

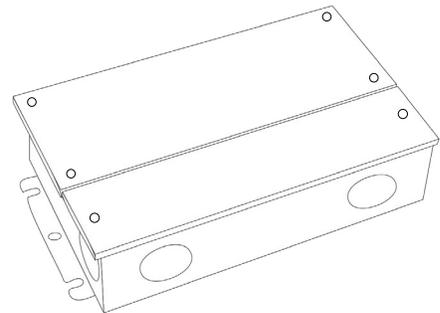

#### LUTRON 1% 3-WIRE DIMMING

L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
------------------	---------	--------------------

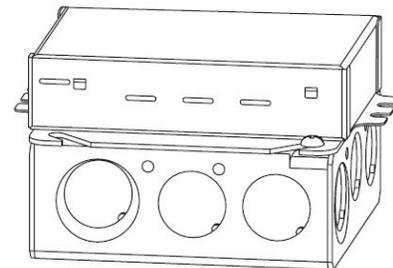

# SLINQ-40

## RECESSED TRIMLESS 360° ROUND NEON SERIES

### COMPATIBLE TRANSFORMERS

LUTRON 1%  
3-WIRE DIMMING

PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



### COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES  
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

