

# SLINQ MINI


## MINI FLEXIBLE 360° ROUND NEON SERIES

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

Set your creativity free and unleash the endless possibilities. With versatile mounting options including flush mounts and free form designs, this flexible 360° light source gives illumination no matter how the fixture is mounted. Discover what you can create with the **Slinq Mini** Neon Series.

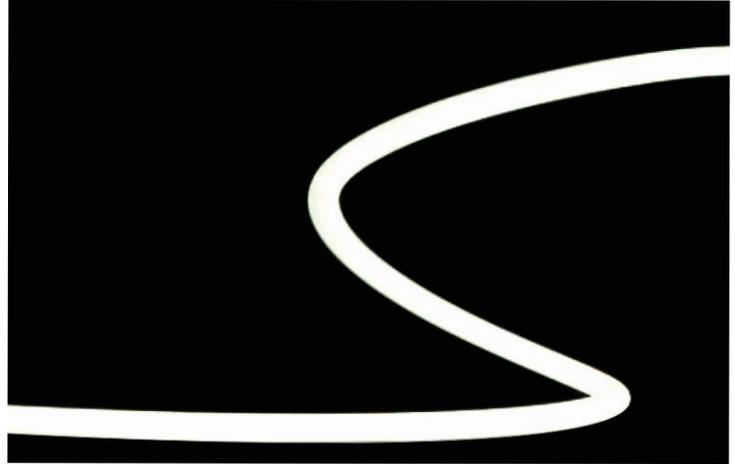

### SPECIFICATIONS

|                       |                                 |
|-----------------------|---------------------------------|
| POWER CONSUMPTION     | 3W per Ft.                      |
| LUMEN OUTPUT          | 204 Lm/ Ft.                     |
| CRI                   | 90+                             |
| COLOR TEMPERATURE     | 23K/ 27K/ 30K/ 43K              |
| MAXIMUM RUN LENGTH    | 16.4 Ft. (24V)   32.8 Ft. (48V) |
| OPERATING VOLTAGE     | 24V/ 48V                        |
| STORAGE TEMPERATURE   | 0°C (0°F) to 60°C (140°F)       |
| OPERATING TEMPERATURE | -25°C (-13°F) to 55°C (131°F)   |
| BEAM ANGLE            | 360°                            |
| IP RATING             | IP65 Outdoor/ Wet Location      |
| LUMEN MAINTENANCE     | 50,000 Hrs.                     |

### FEATURES

- 360° Light Source
- Multiple Mounting Options
- Universal Dimming
- Available in 24V and 48V DC
- IP65 Outdoor Rated
- Factory-Installed Power Feed
- Injection Moulded End-Caps
- Ideal for Decorative, Retail, Artistic Lighting

\*This product is factory-cut only. Do not field modify.




| MODEL  | LENGTH   | COLOR TEMP   | VOLTAGE         | POWER FEED                                    |
|--------|--|--------------|-----------------|---|
| SLQ-15 | 1PF<br>Per Foot  | 23K<br>2300K | 24V<br>24 Volts | EF72<br>72" End Feed                          |
|        |  | 27K<br>2700K | 48V<br>48 Volts |   |
|        |  | 30K<br>3000K |                 |   |
|        |  | 43K<br>4300K |                 |   |
|        | *1 = Custom length per FT.<br><br>(24V - Every 0.98")<br>(48V - Every 1.97") |              |                 | *MAX RUN:<br>24V - 16.4 Ft.<br>48V - 32.8 Ft. |

# SLINQ MINI


## MINI FLEXIBLE 360° ROUND NEON SERIES

### ACCESSORIES


**SLQ15-MC**  
MOUNTING CLIP  
\*SCREWS INCLUDED

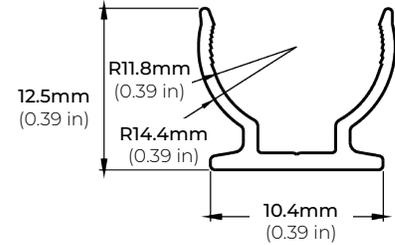

**SLQ15-PC39**  
39" MOUNTING CHANNEL  
\*SCREWS INCLUDED

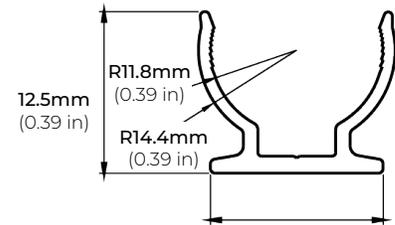

**SLQ15-DMB**  
DISCREET MOUNTING BRACKET  
26mm x 9.4mm x 4mm (L x W x H)  
\*SCREWS INCLUDED

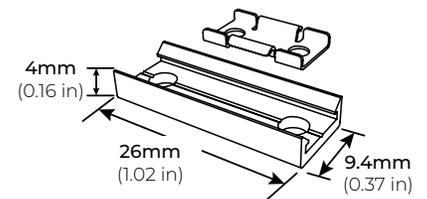


### ROUND PLATE SUSPENSION KIT


SLQ15-RPS-BK SMALL ROUND PLATE (BLACK)  
SLQ15-RPM-BK MEDIUM ROUND PLATE (BLACK)  
SLQ15-RPL-BK LARGE ROUND PLATE (BLACK)

SLQ15-RPS-WH SMALL ROUND PLATE (WHITE)  
SLQ15-RPM-WH MEDIUM ROUND PLATE (WHITE)  
SLQ15-RPL-WH LARGE ROUND PLATE (WHITE)

\*SCREWS INCLUDED

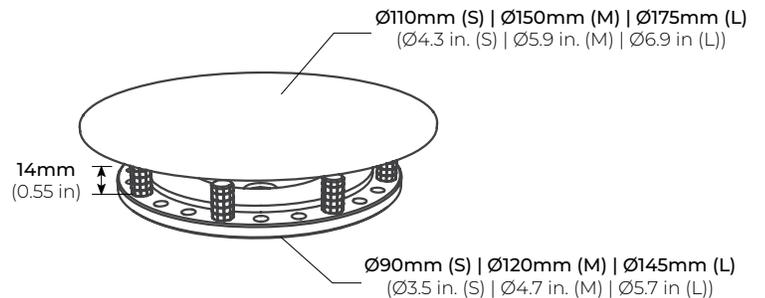

### DIMENSIONS

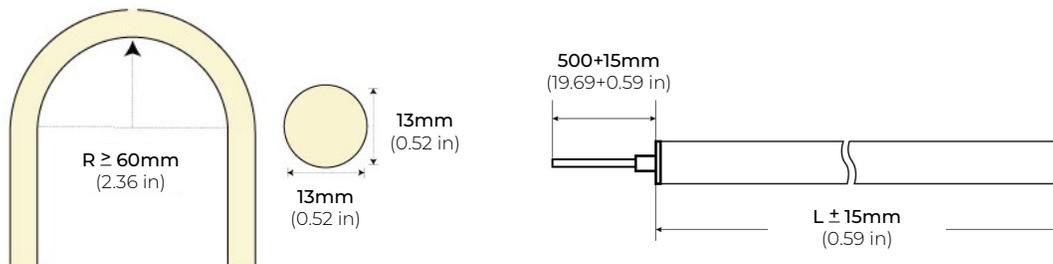


# SLINQ MINI

## MINI FLEXIBLE 360° ROUND NEON SERIES

### COMPATABLE 24V TRANSFORMERS


#### PSDL SERIES TRIAC DIMMABLE

|               |         |                        |
|---------------|---------|------------------------|
| PSDL-30W-24V  | CLASS 2 | 6.5" X 3.63" X 1.58"   |
| PSDL-60W-24V  | CLASS 2 | 7.4" X 3.63" X 1.58"   |
| PSDL-96W-24V  | CLASS 2 | 8.67" X 3.67 X 1.62"   |
| PSDL-150W-24V |         | 10.25" X 4.06" X 1.82" |
| PSDL-192W-24V | CLASS 2 | 11" X 4" X 1.82"       |
| PSDL-200W-24V |         | 10.25" X 4.06" X 1.82" |
| PSDL-288W-24V | CLASS 2 | 11.85" X 4.25" X 1.82" |
| PSDL-300W-24V |         | 10.25" X 4.06" X 1.82" |

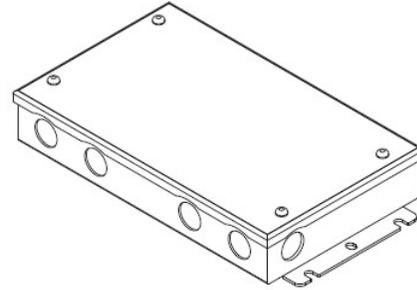


#### PSDH SERIES HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

|               |         |                        |
|---------------|---------|------------------------|
| PSDH-48W-24V  | CLASS 2 | 11.25" X 3.38" X 3.38" |
| PSDH-96W-24V  | CLASS 2 | 11.25" X 3.38" X 3.37" |
| PSDH-288W-24V | CLASS 2 | 14.25" X 8.43" X 4.43" |

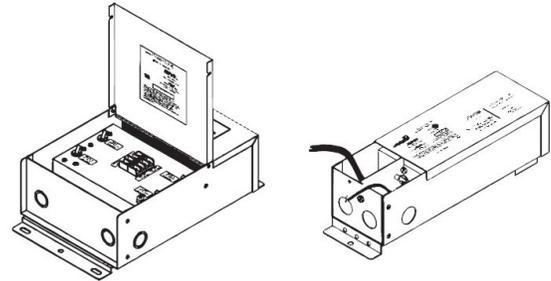

#### PSRX SERIES 4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

|               |         |                        |
|---------------|---------|------------------------|
| PSRX-30W-24V  | CLASS 2 | 6.5" X 3.72" X 1.57"   |
| PSRX-60W-24V  | CLASS 2 | 7.4" X 3.72" X 1.57"   |
| PSRX-96W-24V  | CLASS 2 | 8.66" X 3.72" X 1.57"  |
| PSRX-150W-24V |         | 10.24" X 4.13" X 1.77" |
| PSRX-192W-24V | CLASS 2 | 11" X 4" X 1.82"       |
| PSRX-200W-24V |         | 10.24" X 4.13" X 1.77" |
| PSRX-288W-24V | CLASS 2 | 11.85" X 4.25" X 1.82" |
| PSRX-300W-24V |         | 10.94" X 4.33" X 1.77" |

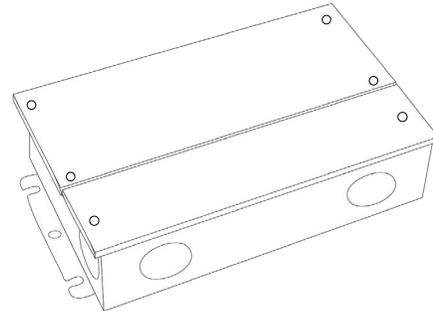


# SLINQ MINI

## MINI FLEXIBLE 360° ROUND NEON SERIES


### COMPATABLE 24V TRANSFORMERS

LUTRON 1%  
3-WIRE DIMMING

L3DA4U1UKL-CV240 CLASS 2 4.89" X 4" X 2.62"

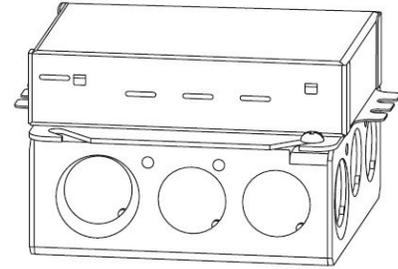


PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



### COMPATABLE 24V NON-DIMMING DRIVERS

PSHK SERIES  
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

|               |         |                        |
|---------------|---------|------------------------|
| PSHK-30W-24V  | CLASS 2 | 6.5" X 3.6" X 1.02"    |
| PSHK-60W-24V  | CLASS 2 | 7.4" X 3.62" X 1.02"   |
| PSHK-96W-24V  | CLASS 2 | 8.66" X 3.66" X 1.61"  |
| PSHK-150W-24V |         | 10.24" X 4.06" X 1.81" |
| PSHK-200W-24V |         | 10.24" X 4.06" X 1.81" |
| PSHK-288W-24V | CLASS 2 | 11.85" X 4.25" X 1.82" |
| PSHK-300W-24V |         | 10.24" X 4.25" X 1.81" |

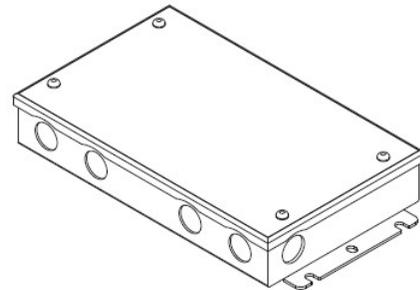

### COMPATABLE 48V TRANSFORMERS

PSRX SERIES  
4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

|                   |                        |
|-------------------|------------------------|
| PSRX-200W-48V-UNV | 10.24" X 4.13" X 1.77" |
| PSRX-300W-48V-UNV | 10.24" X 4.13" X 1.77" |

