

CSL-390

INDIRECT SUSPENDED LINEAR LED LUMINAIRE

Project _____

Location _____

Quote/ Ref # _____

The **CSL-390** is a suspended linear LED fixture designed with a simple yet elegant structure combined with the indirect lighting concept which provides a uniform light output and an excellent anti-glare effect to your space. Its advanced thermal management technology guarantees continuous high lumen output and constant CCT at up to 850 lumens per linear foot.



SPECIFICATIONS

| | |
|-----------------------|-----------------------------|
| TYPE | Suspended |
| INPUT VOLTAGE | 100V-277V |
| POWER CONSUMPTION | 5.5W - 8W |
| LUMEN OUTPUT | Up to 850 Lm/ Ft. |
| LIGHTING DISTRIBUTION | Up |
| CRI | 90+ |
| LENGTHS | 4 Ft. / 6 Ft. / 8 Ft. |
| MAX RUN LENGTH | Powerfeed every 12 Ft. |
| COLOR TEMPERATURE | 27K / 30K / 35K / 40K / 50K |
| DIMMING | ELV, 0-10V and TRIAC |
| POWER FEED | 10Ft. |
| IP RATING | Dry/ Damp Location |
| DRIVER | Remote |
| CERTIFICATIONS | UL Listed |

FEATURES

- 2.5" wide aperture
- Aircraft cable suspension system included
- High quality aluminum alloy
- Multiple CCT options, warm-dim
- Remote Driver
- UL Listed (US and Canada)

LUMENS

| TYPE | W/ FT. | LM/ FT. |
|------|--------|---------|
| L1 | 5.5W | 530 |
| L2 | 7W | 700 |
| L3 | 8W | 850 |




| MODEL | LENGTH | UP LIGHT | COLOR TEMPERATURE | FINISH | VOLT | MOUNTING | DRIVER |
|--------|---|--------------|-------------------|--|---------------------------------------|------------------|---|
| CSL390 | 4 4 Ft. | L1 530 Lm | 27K 2700K | WD1827 Warm-Dim 18K/27K | SI Silver | 2UNV 120-277V | C12 12 ft. Cable CXX Custom (XX-Ft. Ceiling to top of fixture) |
| | 6 6 Ft. | L2 700 Lm | 30K 3000K | WD1830 Warm-Dim 18K/30K | BK Black | | |
| | 8 8 Ft. | L3 850 Lm | 35K 3500K | | WH White | | |
| | 1CR Custom Length | | 40K 4000K | MXCCT Color Tuning (Contact Factory) | | | |
| | | | | 50K 5000K | | | |
| | *1 = Continuous run in 4 ft increments | | | | *2 = Remote Mounted Driver only | | REMOTE: EB Electronic TRIAC D10 1% 0-10V |

CSL-390

INDIRECT SUSPENDED LINEAR LED LUMINAIRE

DIMENSIONS

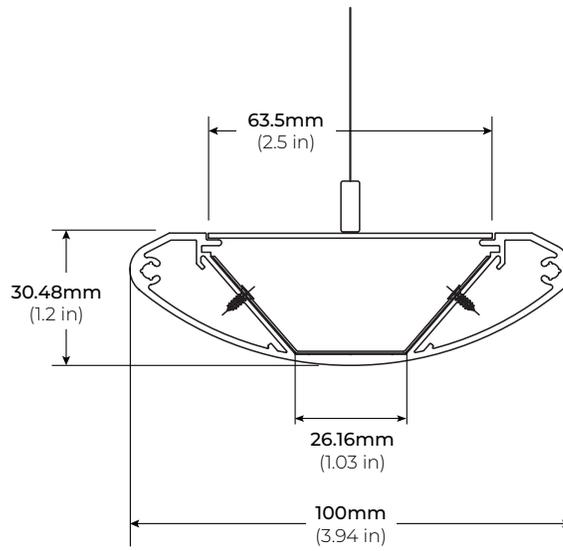

CSL-390

INDIRECT SUSPENDED LINEAR LED LUMINAIRE


SUSPENSION KIT ACCESSORIES

*REQUIRED FOR SUSPENSION MOUNTING

POWER FEED KIT

ALP-CF-WH
WHITE POWER FEED KIT


ALP-CF-BK
BLACK POWER FEED KIT



2" NON-POWER FEED KIT

ALP-CSB-WH-2
2" WHITE FEED KIT


ALP-CSB-BK-2
2" BLACK FEED KIT



5" NON-POWER FEED KIT

ALP-CSB-WH-5
5" WHITE FEED KIT

ALP-CSB-BK-5
5" BLACK FEED KIT




CSL-390

INDIRECT SUSPENDED LINEAR LED LUMINAIRE

COMPATIBLE TRANSFORMERS


PSDL SERIES TRIAC DIMMABLE

| | | |
|---------------|---------|------------------------|
| PSDL-30W-24V | CLASS 2 | 6.5" X 3.63" X 1.03" |
| PSDL-60W-24V | CLASS 2 | 7.4" X 3.63" X 1.03" |
| PSDL-96W-24V | CLASS 2 | 8.67" X 3.67 X 1.62" |
| PSDL-150W-24V | | 8.67" X 3.67" X 1.62" |
| PSDL-192W-24V | CLASS 2 | 10.25" X 4.06" X 1.82" |
| PSDL-200W-24V | | 10.25" X 4.06" X 1.82" |
| PSDL-288W-24V | CLASS 2 | 10.25" X 4.06" X 1.82" |
| PSDL-300W-24V | | 10.25" X 4.06" X 1.82" |

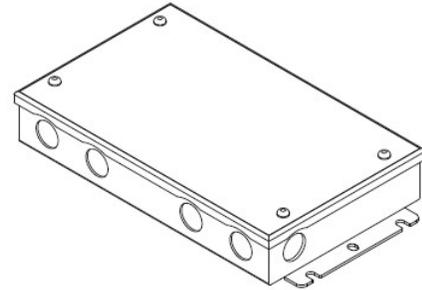


PSRX SERIES 4-IN-1 DIMMING DRIVER

| | | |
|---------------|---------|------------------------|
| PSRX-30W-24V | CLASS 2 | 6.5" X 3.72" X 1.57" |
| PSRX-60W-24V | CLASS 2 | 7.4" X 3.72" X 1.57" |
| PSRX-96W-24V | CLASS 2 | 8.66" X 3.72" X 1.57" |
| PSRX-150W-24V | | 10.24" X 4.13" X 1.77" |
| PSRX-192W-24V | CLASS 2 | 11" X 4" X 1.82" |
| PSRX-200W-24V | | 10.24" X 4.13" X 1.77" |
| PSRX-288W-24V | CLASS 2 | 11.85" X 4.25" X 1.82" |
| PSRX-300W-24V | | 10.94" X 4.33" X 1.77" |

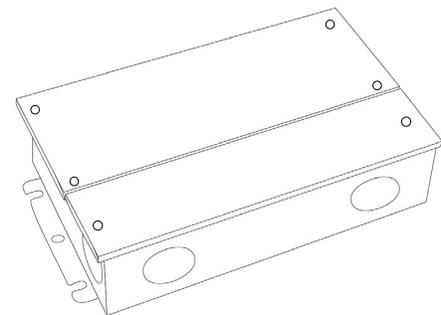


PSVT SERIES 0-10V DIMMING DRIVER

| | | |
|---------------|---------|------------------------|
| PSVT-60W-24V | CLASS 2 | 7.4" X 3.72" X 1.57" |
| PSVT-96W-24V | CLASS 2 | 8.66" X 3.72" X 1.57" |
| PSVT-200W-24V | | 10.24" X 4.13" X 1.77" |
| PSVT-288W-24V | CLASS 2 | 11.85" X 4.25" X 1.81" |
| PSVT-300W-24V | | 10.94" X 4.33" X 1.77" |

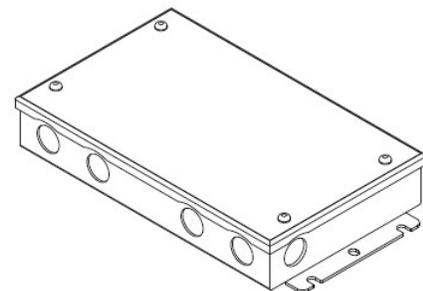

PSDE SERIES 0-10V DIMMING W/ JUNCTION BOX

| | | |
|---------------------|---------|----------------------|
| PSDE-60W-24V-010-JB | CLASS 2 | 12.1" X 2.36" X 1.4" |
| PSDE-96W-24V-010-JB | CLASS 2 | 12.1" X 2.36" X 1.4" |

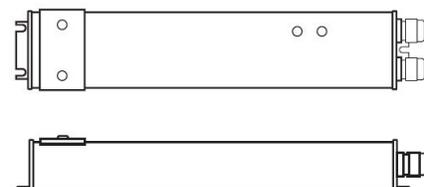


CSL-390

INDIRECT SUSPENDED LINEAR LED LUMINAIRE

COMPATIBLE TRANSFORMERS

LUTRON 1%
3-WIRE DIMMING

L3DA4U1UKL-CV240 CLASS 2 4.89" X 4" X 2.62"

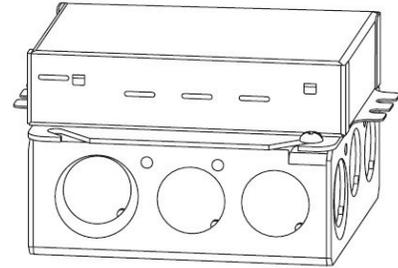

LUTRON 1%

PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



NON-DIMMING DRIVERS (COMPATIBLE WITH ALL SYSTEMS)

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

| | | |
|---------------|---------|------------------------|
| PSHK-30W-24V | CLASS 2 | 6.5" X 3.6" X 1.02" |
| PSHK-60W-24V | CLASS 2 | 7.4" X 3.62" X 1.02" |
| PSHK-96W-24V | CLASS 2 | 8.66" X 3.66" X 1.61" |
| PSHK-150W-24V | | 10.24" X 4.06" X 1.81" |
| PSHK-200W-24V | | 10.24" X 4.06" X 1.81" |
| PSHK-288W-24V | CLASS 2 | 11.85" X 4.25" X 1.82" |
| PSHK-300W-24V | | 10.24" X 4.25" X 1.81" |

