

# IGU-200TL

## TRIMLESS IN-GROUND LINEAR UPLIGHT

Project \_\_\_\_\_  
Location \_\_\_\_\_  
Quote/ Ref # \_\_\_\_\_

**IGU-200TL** is a trimless in-ground linear uplight featuring multiple beam angle options including long, narrow pattern and assymetric optic. Designed for in-ground/recessed installations in concrete or lawns, this fixture is ideal for wall washing and illuminating ground mounted signs and linear objects.



### SPECIFICATIONS

<b>INPUT VOLTAGE</b>	120-277V AC
<b>POWER CONSUMPTION</b>	14.6W/ Ft.
<b>LUMEN OUTPUT</b>	85 Lm/ W
<b>COLOR TEMPERATURE</b>	27K / 30K / 35K / 40K / 60K / Red / Green / Blue / Amber / Yellow / RGB / RGBW / RGBA
<b>BEAM ANGLE</b>	8° / 15° / 30° / 45° / 60° / 10° x 40° / 20° x 60° / Asymmetric / Frosted Lens (120°)
<b>CRI</b>	80+, 90 (optional, consult factory)
<b>DIMMING</b>	0-10V, DMX, DALI and Casambi
<b>HOUSING</b>	Extruded Anodized Aluminum
<b>COVER</b>	Tempered Glass
<b>TOP COVER FRAME</b>	Stainless Steel 316
<b>OPERATING TEMPERATURE</b>	-4°F (-20°C) ~ 122°F (50°C)
<b>STORAGE TEMPERATURE</b>	-4°F (-20°C) ~ 140°F (60°C)
<b>IP RATING</b>	IP67
<b>MAX LOAD</b>	1000 lbs (500 kgs)
<b>CERTIFICATIONS</b>	3G Vibration, RoHS, ETL Listed
<b>LUMEN MAINTENANCE</b>	50,000 Hrs.
<b>IMPACT RATING</b>	IK09
<b>WEIGHT</b>	1.46 kg/ Ft. (3.22 lbs)

### FEATURES

- 120 - 277V AC
- Trimless Frame
- Max load 1000 lbs (500kgs)
- Built-in Driver
- Stainless Steel Frame
- Clear Tempered Glass
- Recessed Housing Included
- 3G Vibration




MODEL	LENGTH	COLOR TEMPERATURE			OPTIC	FINISH	VOLT	CONTROL	OPTIONS		
IGU200TL	<b>12</b> 12 in. (14.6W)	<b>27K</b> 2700K	<b>RD</b> Red	<b>RGB</b> RGB	<b>18/27K</b> 1800K/ 2700K	<b>8</b> 8°	<b>1040</b> H10° x V40°	<b>TG</b> Titanium Gray	<b>UNV</b> 120-277V	<b>NDM</b> No Dimming	<b>HC</b> Honeycomb Louver
	<b>20</b> 20 in. (24W)	<b>30K</b> 3000K	<b>GR</b> Green	<b>RGBW</b> RGBW	<b>18/30K</b> 1800K/ 3000K	<b>15</b> 15°	<b>2060</b> H20° x V60°	<b>BK</b> Black		<b>D10</b> 0-10V Dimming	<b>GS</b> Anti-Glare Shield
		<b>35K</b> 3500K	<b>BL</b> Blue	<b>RGBA</b> RGBA (Amber)		<b>30</b> 30°	<b>ASY</b> Asymmetric	<b>WH</b> White			
	<b>40</b> 40 in. (48W)	<b>40K</b> 4000K	<b>AM</b> Amber			<b>45</b> 45°	<b>FR</b> Frosted Lens (120°)			<b>DMX</b> DMX	
		<b>60K</b> 6000K	<b>YE</b> Yellow			<b>60</b> 60°				<b>DALI</b> Dali	
									<b>CAS</b> Casambi		


# IGU-200TL

## TRIMLESS IN-GROUND LINEAR UPLIGHT

### DIMENSIONS

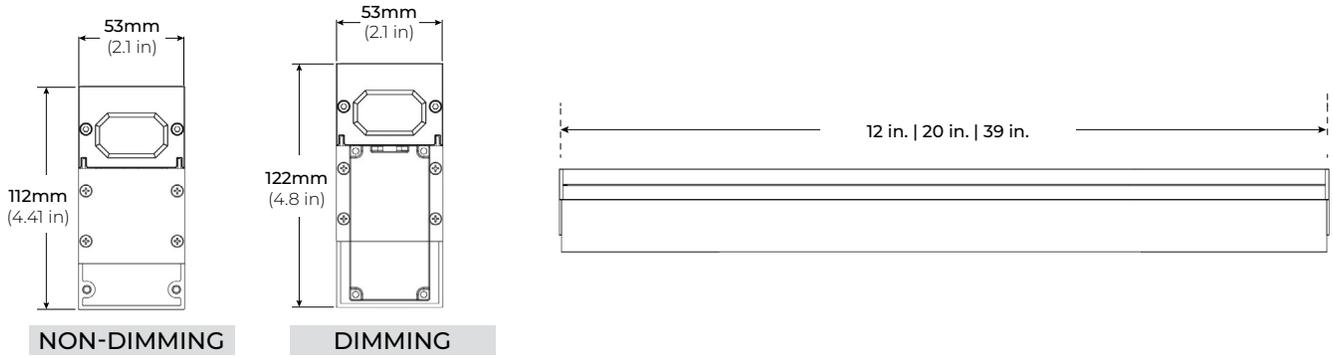

### OPTICS

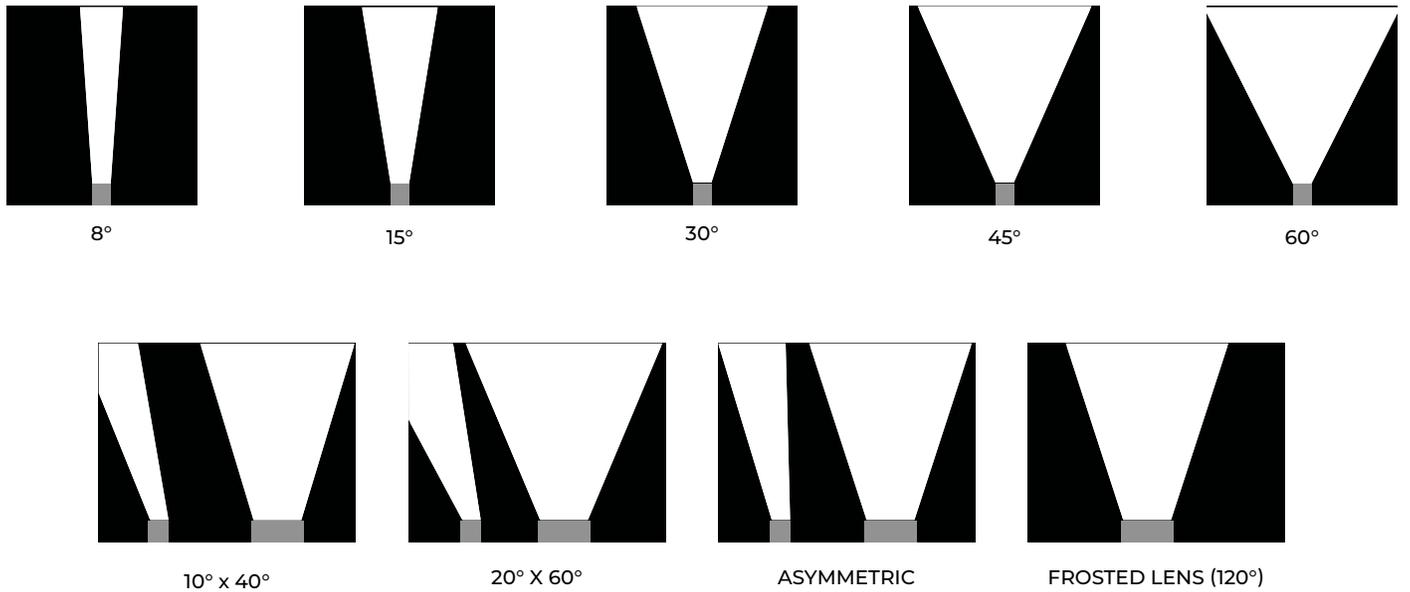

# IGU-200TL

## TRIMLESS IN-GROUND LINEAR UPLIGHT

### OPTIONAL ACCESSORIES

IGU200TL-HC  
HONEYCOMB LOUVER



IGU200TL-GS  
ANTI-GLARE SHIELD



### PRODUCT OVERVIEW

