

LWW120-SO

120V-277V HIGH-PERFORMANCE LED WALL WASHER

Project _____
Location _____
Quote/ Ref # _____

LWW120-SO Linear Wall washer series is a powerful 120V LED flood light typically used for building facades, signs or any wall washing application Available in multiple optical lens options to provide endless lighting solutions. Available in narrow, medium, wide and elliptical optic options.



SPECIFICATIONS

INPUT VOLTAGE	100-277V AC
OPERATING FREQUENCY	50-60Hz
POWER CONSUMPTION	10W/Ft.
LUMEN OUTPUT	125 Lm/W (30K)
COLOR TEMPERATURE	27K / 30K / 40K / 50K / 60K / RD / GN / BL
BEAM ANGLE	7° / 15° / 20° / 25° / 40° / 15° x 45° / 15° x 60°
MAX RUN	Linkable up to 100 ft
CRI	80+
DIMMING	0-10V, DALI
OPERATING TEMPERATURE	-4°F (-20°C) to 122°F (50°C)
STORAGE TEMPERATURE	-22°F (-30°C) to 140°F (60°C)
HOUSING	6063 Extruded aluminum
IP RATING	IP66 Outdoor/Wet Location
CERTIFICATIONS	ETL Listed
LUMEN MAINTENANCE	50,000 hrs.

FEATURES

- Linkable up to 60 ft.
- Multiple Beam Angles
- Multiple CCT Options Available
- Proprietary Adjustable Mounting Bracket
- Facade Wall Washing
- Graze Lighting
- Signage
- ETL Listed (US and Canada)




MODEL	LENGTH	CCT	OPTICS	FINISH	OPTIONS	VOLTAGE	DIMMING	MOUNTING OPTIONS
LWW120-SO	24 24 in (20W)	27K 2700K	7 7°	TG Titanium Grey	ADLV Asymmetric Anti-Glare Louver	UNV 120V-277V	D10 0-10V Dimming	STD Flip-Flop Bracket (Standard)
		30K 3000K	15 15°		WH White			SDLV Symmetric Anti-Glare Louver
	36 36 in (30W)	40K 4000K	20 20°	BK Black	HC Honeycomb Louver		MA Adjustable Mounting Bracket	
		50K 5000K	25 25°					WMS Small Wall Mount Arms
	48 48 in (40W)	65K 6500K	40 40°	RD Red	1545 15° x 45°		WML Large Wall Mount Arms	
		GR Green	1560 15° x 60°					GSK Ground Stake
		BL Blue						


LWW120-SO

120V-277V HIGH-PERFORMANCE LED WALL WASHER

DIMENSIONS

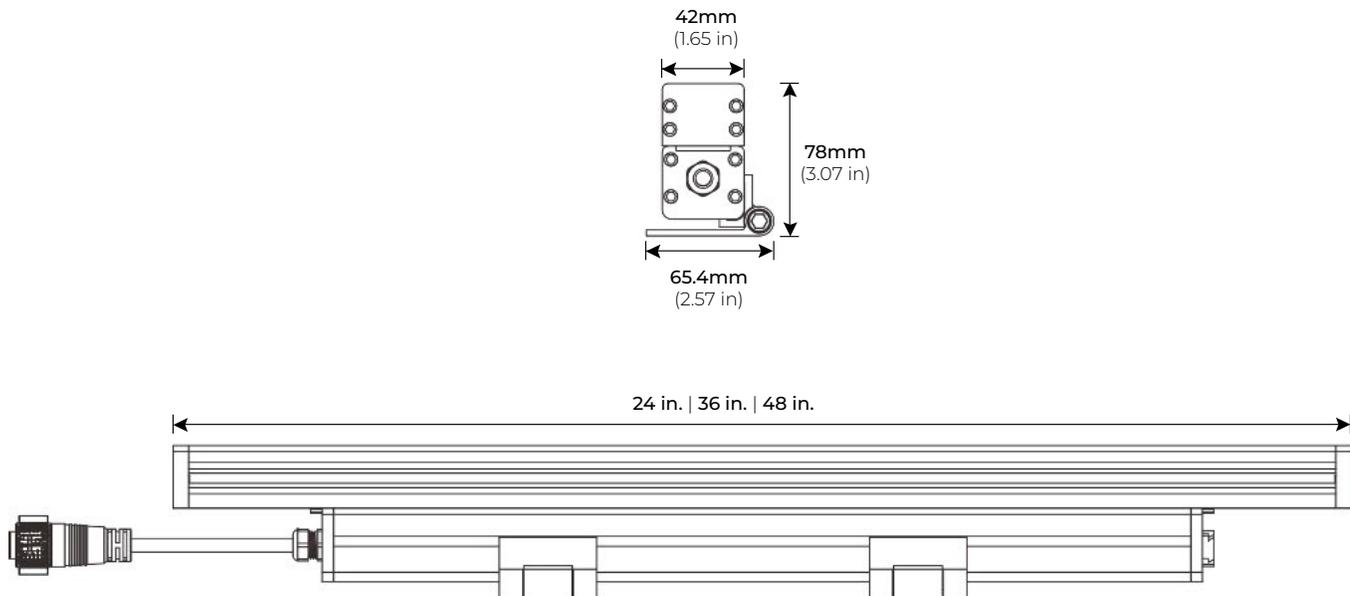

OPTICS


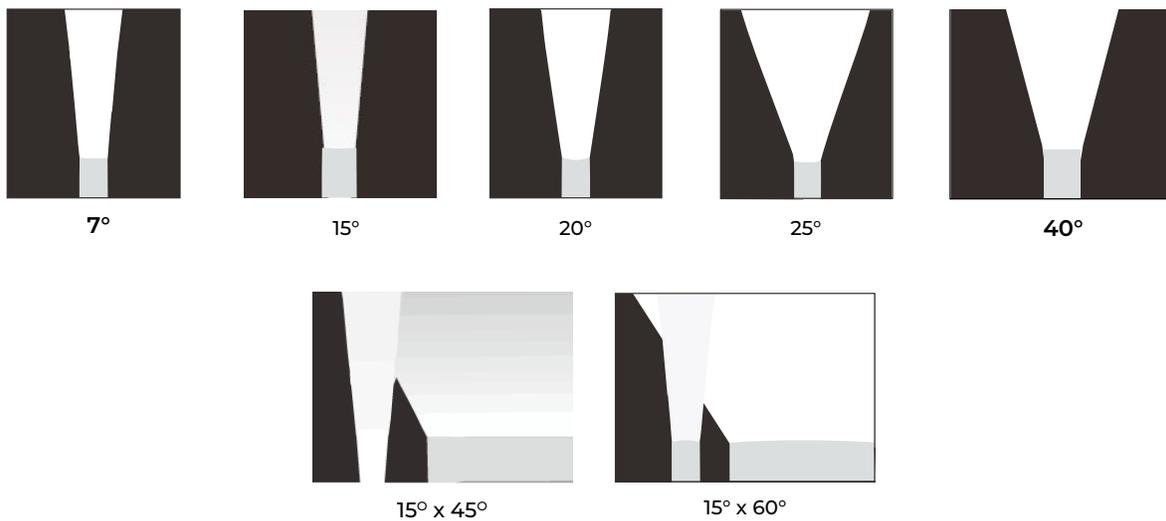


LWW120-SO



120V-277V HIGH-PERFORMANCE LED WALL WASHER

MOUNTING ACCESSORIES



LWW120-SO-STD
"FLIP-FLOP" BRACKET
*Included with every Fixture




LWW120-SO-ML
L-SHAPED TILTING BRACKET
*Sold Separately



LWW120-SO-MA
ADJUSTABLE MOUNTING BRACKET
*Sold Separately




LWW-GSK
GROUND STAKE
*Sold Separately

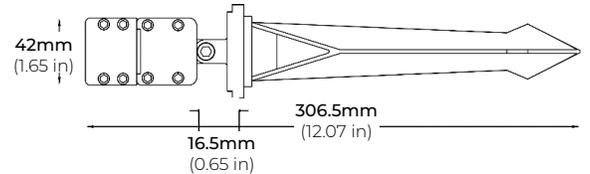

LWW-WMS
SMALL WALL MOUNT (6-9")
*Sold Separately



Adjustable Length Wall to Fixture
Small Mounting Arm: 6-9 in.
Large Mounting Arm: 14-22 in.

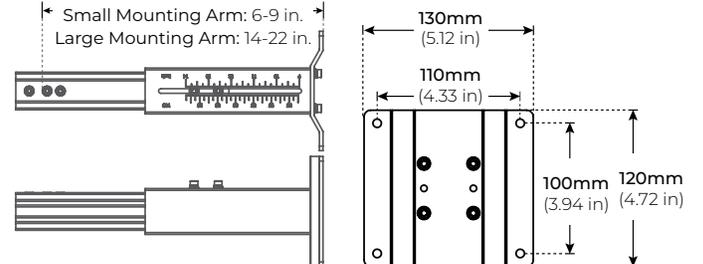

LWW-WML
LARGE WALL MOUNT (14-22")
*Sold Separately

LWW120-SO

120V-277V HIGH-PERFORMANCE LED WALL WASHER


COMPATIBLE ACCESSORIES

LWW120-EC

END CAP

*Sold Separately

*Required for each run length

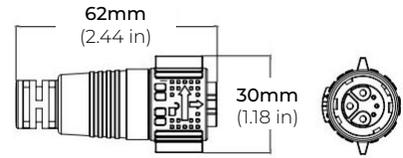


LWW120-SO-24-ADLV

LWW120-SO-36-ADLV

LWW120-SO-48-ADLV

24", 36", 48" ASYMMETRIC LOUVER

*SOLD SEPARATELY




LWW120-SO-24-SDLV

LWW120-SO-36-SDLV

LWW120-SO-48-SDLV

24", 36", 48" SYMMETRIC LOUVER

*SOLD SEPARATELY



LWW120-SO-HC

HONEYCOMB LOUVER



LWW120-LNK-10

LWW120-LNK-36

LWW120-LNK-72

10", 36", 72" LINK EXTENSION CABLE

*SOLD SEPARATELY



LWW120-HWC-72

LWW120-HWC-120

72" AND 120" HARDWIRE CABLE

*SOLD SEPARATELY

