

LWW-SL

HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER

Project _____

Location _____

Quote/ Ref # _____

LWW-SL Linear Wall washer series is a powerful LED flood light typically used for building facades, signs or any wall washing applications. Variety of optical lens options provides endless lighting solutions. Available in narrow, medium, wide and elliptical optic options.



SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	7W per Ft.
LUMEN OUTPUT	82 Lm/ W.
CRI	90+
COLOR TEMPERATURE	22K / 27K / 30K / 40K / 50K / 60K RD / GN / BL / AM
DIMMING	TRIAC
MAX RUN	Linkable up to 12 ft.
OPERATING TEMPERATURE	-40°F TO 122°F (-40°C TO 50°C)
OPERATING TEMPERATURE	-40°F TO 176°F (-40°C TO 80°C)
BEAM ANGLE	15° / 20° / 25° / 50° / 10°x40°
IP RATING	IP65 wet location (outdoor)

FEATURES

- 90+ CRI
- Up to 82 Lumens per Watt
- Linkable up to 12Ft.
- Proprietary Optical Technology
- TRIAC Dimming
- Proprietary Adjustable Mounting Bracket
- Facade Wall Washing
- Graze Lighting
- Signage




MODEL	LENGTH	COLOR TEMP		OPTICS	OPTIONS	FINISH	VOLTAGE
LWWSL	12 12" (7W)	22K 2200K	RD Red	15 15°	FMB Fixed Mounting Bracket	TG Titanium Grey	24 24V DC
	20 20" (12W)	27K 2700K	GN Green	20 20°	STB Standard Tilting Bracket	*BK Black	
		30K 3000K	BL Blue	25 25°		*WH White	
	24 24" (15W)	40K 4000K	AM Amber	50 50°	ETB Extended Tilting Bracket		
	40 40" (24W)	50K 5000K		10x40 10° x 40°	STK Mounting Stake		
	48 48" (29W)	60K 6000K			WMS Small Wall Mount Arms		
				WML Large Wall Mount Arms			

* Special order item- allow up to 4 weeks of lead time


LWW-SL

HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER


DIMENSIONS




OPTICS




15°




20°



25°




50°




10° x 40°

MOUNTING ACCESSORIES


LWW-SL-FMB
FIXED MOUNTING BRACKET
*Sold Separately



LWW-SL-STB
STANDARD TILTING BRACKET
*Included with every Fixture



LWW-SL-ETB
EXTENDED TILTING BRACKET
*Sold Separately




LWW-SL

HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER

MOUNTING ACCESSORIES


LWW-SL-STK
MOUNTING STAKE

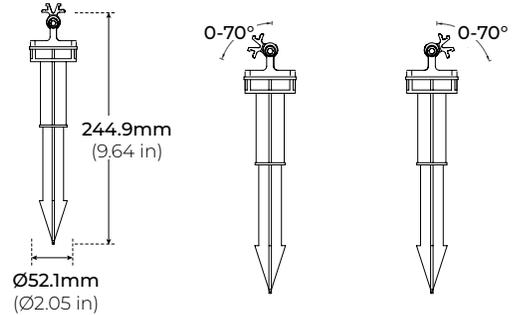

LWW-WMS
SMALL WALL MOUNT ARM (6-9")
*Sold Separately




LWW-WML
LARGE WALL MOUNT ARM (14-22")
*Sold Separately

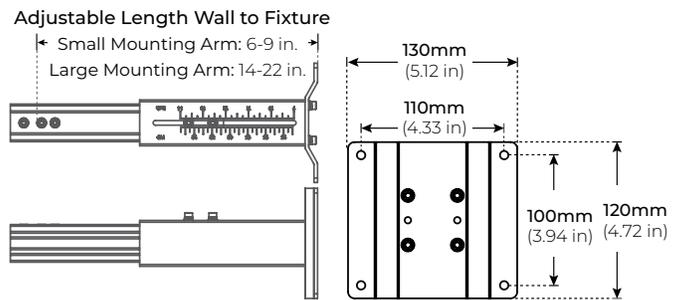


COMPATIBLE ACCESSORIES

LWW-EC
END CAP
*Sold separately


*One end cap required per run length

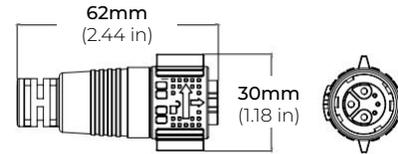

LWW-SL-12-ADLV
LWW-SL-24-ADLV
LWW-SL-36-ADLV
LWW-SL-40-SDLV
LWW-SL-48-ADLV
12", 24", 36", 40", 48" ASYMMETRIC LOUVER
*Sold Separately



LWW-SL-12-SDLV
LWW-SL-24-SDLV
LWW-SL-36-SDLV
LWW-SL-40-SDLV
LWW-SL-48-SDLV
12", 24", 36", 40", 48" SYMMETRIC LOUVER
*Sold Separately



LWW-SL

HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER

COMPATIBLE ACCESSORIES

LWW-LNK-10
LWW-LNK-36
LWW-LNK-72
10", 36", 72" LINK EXTENSION CABLE
*Sold Separately




LWW-HWC-72-BK
72" HARDWIRE CABLE
*Sold Separately



HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER


PHOTOMETRICS

3500K CR180
BEAM ANGLE (50%) 15°
FIELD ANGLE (10%) 35°

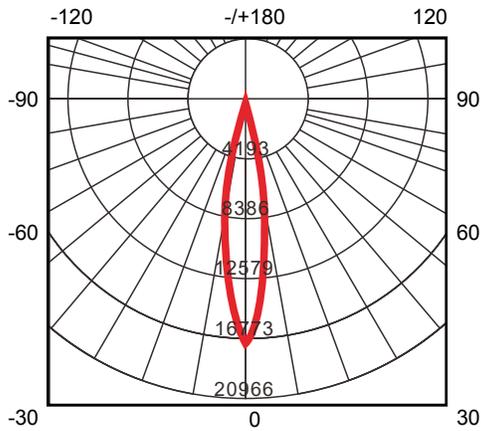


UNIT: CD
— C0-C180 — C90-C270

3500K CR180
BEAM ANGLE (50%) 30°
FIELD ANGLE (10%) 55°

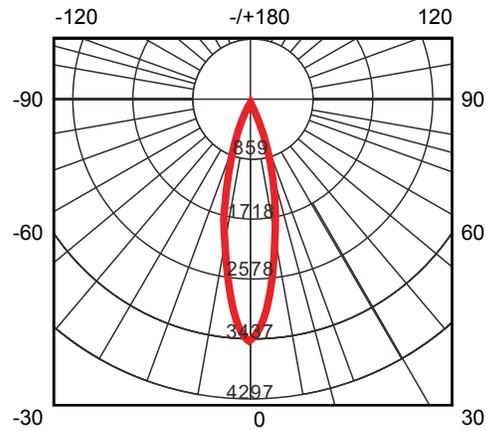


UNIT: CD
— C0-C180 — C90-C270

3500K CR180
BEAM ANGLE (50%) 15°
FIELD ANGLE (10%) 85°

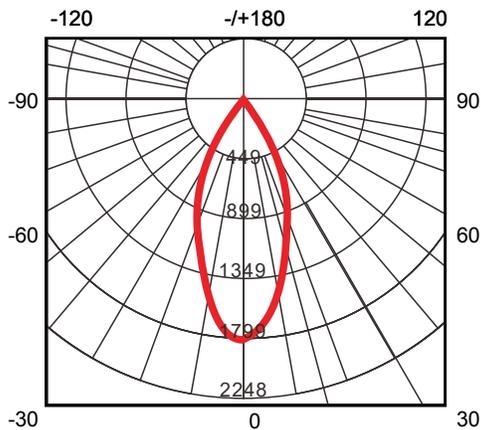

UNIT: CD
— C0-C180 — C90-C270

3500K CR180
BEAM ANGLE (50%) 10° X 40°
FIELD ANGLE (10%) 30° X 65°

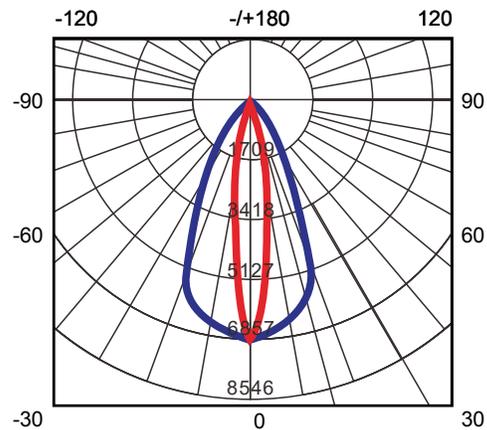

UNIT: CD
— C0-C180 — C90-C270


LWW-SL

HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER

COMPATIBLE TRANSFORMERS


PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.03"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.03"
PSDL-96W-24V	CLASS 2	8.67" X 3.67" X 1.62"
PSDL-150W-24V		8.67" X 3.67" X 1.62"
PSDL-192W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

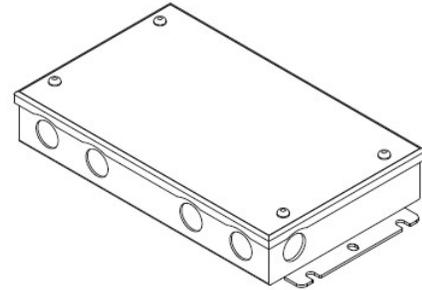


PSDE SERIES 0-10V DIMMING W/ JUNCTION BOX

PSDE-60W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"
PSDE-96W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"

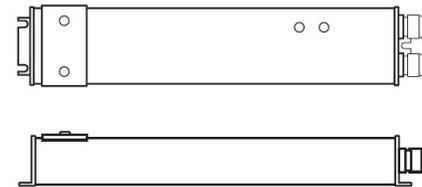


PSRX SERIES 4-IN-1 DIMMING DRIVER

PSRX-30W-24V	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V		10.24" X 4.13" X 1.77"
PSRX-192W-24V	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V		10.24" X 4.13" X 1.77"
PSRX-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V		10.94" X 4.33" X 1.77"

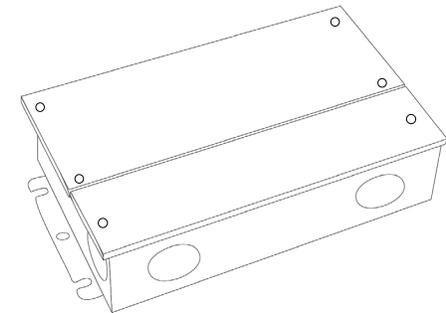

PSVT SERIES 0-10V DIMMING DRIVER

PSVT-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSVT-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSVT-200W-24V		10.24" X 4.13" X 1.77"
PSVT-288W-24V	CLASS 2	11.85" X 4.25" X 1.81"
PSVT-300W-24V		10.94" X 4.33" X 1.77"

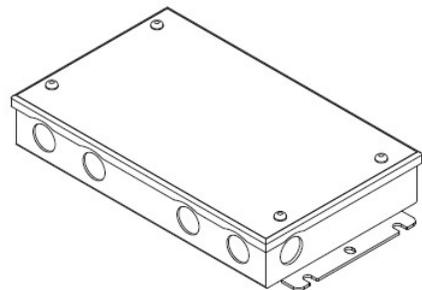


LWW-SL

HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER


COMPATIBLE TRANSFORMERS

LUTRON 1%
3-WIRE DIMMING

L3DA4U1UKL-CV240 CLASS 2 4.89" X 4" X 2.62"

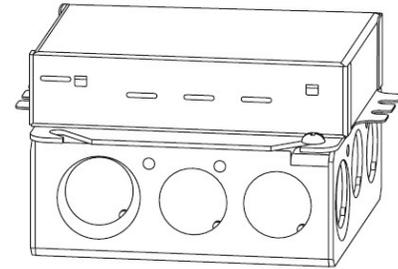

PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

