

LWW120-CV

120V-277V HIGH-OUTPUT LED WALL WASHER

Project _____

Location _____

Quote/ Ref # _____

LWW120-CV Linear Wall washer series is a powerful 120V LED flood light typically used for building facades, signs or any wall washing application Available in multiple optical lens options to provide endless lighting solutions. Available in narrow, medium, wide and elliptical optic options.



SPECIFICATIONS

INPUT VOLTAGE	120-277 AC
OPERATING FREQUENCY	50/ 60 Hz
POWER CONSUMPTION	5.5W/ Ft.
LUMEN OUTPUT	Up to 840 Lm.
COLOR TEMPERATURE	27K / 30K / 40K / 60K
BEAM ANGLE	15° / 30° / 45° / 20° x 40°
MAX RUN	Linkable up to 60 ft.
CRI	90+
DIMMING	0-10V
OPERATING TEMPERATURE	-4°F (-20°C) ~ 104°F (40°C)
HOUSING	Extruded Aluminum
FINISH	Silver, Black
IP RATING	IP66 Outdoor/ Wet Location
CERTIFICATIONS	ETL Listed
LUMEN MAINTENANCE	50,000 Hrs.
WARRANTY	5-Year Limited

FEATURES

- 90+ CRI
- Multiple beam angles
- Multiple CCT options available
- ETL Listed




MODEL	LENGTH	COLOR TEMP	OPTICS	DIMMING	OPTIONS	VOLTAGE	FINISH
LWW120-CV	12 12.32 in	27K 2700K	15 15°	D10 0-10V	GS Glare Shield	UNV 120V-277V	SI Silver
	24 24.21 in	30K 3000K	30 30°				BK* Black
	48 48.03 in	40K 4000K	45 45°				
	60K 6000K	2040 20° x 40°					

* Additional lead time required

LWW120-CV

120V-277V HIGH-OUTPUT LED WALL WASHER

DIMENSIONS

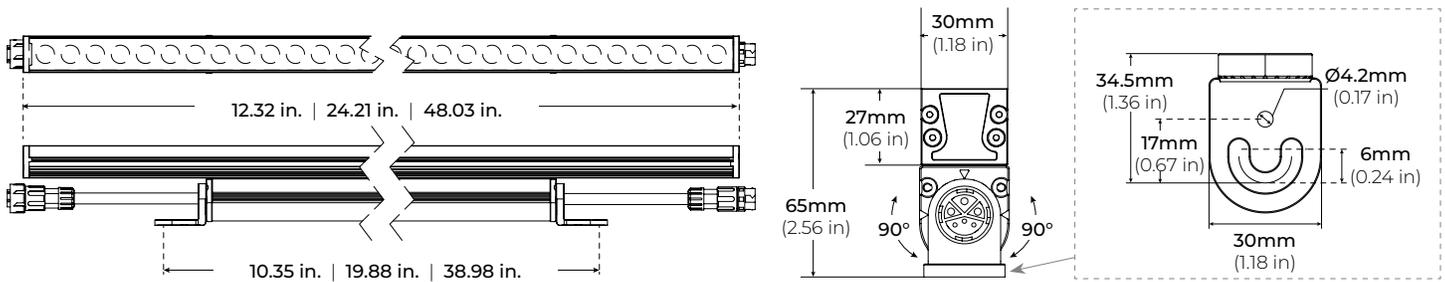

OPTICS




COMPATIBLE ACCESSORIES


LWW120-EC END CAP

*Sold Separately

*One end cap required per run length

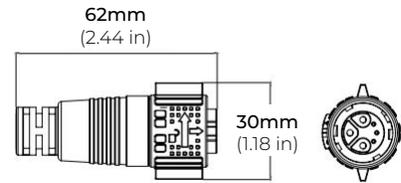

LWW120-CV-GS GLARE SHIELD

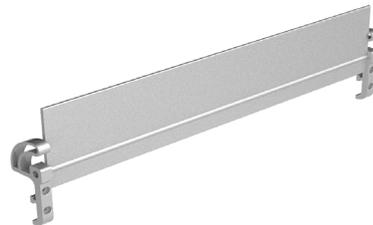

LWW120-CV

120V-277V HIGH-OUTPUT LED WALL WASHER

COMPATIBLE ACCESSORIES

LWW120-LNK-10
LWW120-LNK-36
LWW120-LNK-72
10", 36", 72" LINK EXTENSION CABLE
*Sold Separately



LWW120-HWC-72
LWW120-HWC-120
72" AND 120" HARDWIRE CABLE
*Sold Separately

