

SLG-4000

HIGH POWER INTERIOR LINEAR COVE

Project _____
Location _____
Quote/ Ref # _____

The **SLG-4000** linear cove / wall washer comes in high and standard outputs with multiple color temperature options. Its proprietary small, adjustable mounting and continuous run connectors make the SLG-4000 series suitable for any architectural, retail, hospitality and display applications.



SPECIFICATIONS

OPERATING VOLTAGE	110-277V AC
OPERATING FREQUENCY	50Hz / 60 Hz
DRIVER	Internal / Built-in
POWER CONSUMPTION	11.9W (1ft) 47.7W (4ft)
DISTRIBUTION	10° x 10° / 10° x 60° / 30° x 60°
CRI	90+
COLOR TEMPERATURE	22K/ 24K/ 27K/ 30K/ 35K/ 40K/ 50K
DIMMING/ CONTROL	100-120V/ ELV
LENS	Clear Polycarbonate
CONNECTORS	Integral Male / Female 5 pin
MAXIMUM RUN LENGTH	48 Ft.
ENVIRONMENT	Indoor / Dry / Damp Location
OPERATING TEMPERATURE	14°F (-10°C) ~ 104°F (40°C)
STORAGE TEMPERATURE	40°F (-40°C) ~ 176°F (80°C)
MOUNTING OPTIONS	Adjustable 80° + 80°
CERTIFICATIONS	ETL, Conforms to UL STD 1598, Certified to CSA STD C2.2 NO.250.0-08

FEATURES

- Up to 1000+ Lumens per foot
- Up to 90+ Lumens per Watt
- Proprietary Optical Technology
- ELV Dimming
- Small Profile Fixture
- Continuous Run Capability
- Proprietary Adjustable Mounting Bracket
- Facade Wall Washing
- Graze Lighting
- Signage




MODEL	LENGTH	COLOR TEMP	OPTICS	VOLTAGE	DIMMING
SLG	4012 12 in	22K 2200K	BX 10° X 10°	120V 120V	ELV Electronic/ TRIAC
	4048 48 in	25K 2500K	BV 10° X 60°		
		27K 2700K	BG 30° X 60°		
		*30K 3000K			
		35K 3500K			
		40K 4000K			
		50K 5000K			
		*Quick ship			

SLG-4000

HIGH POWER INTERIOR LINEAR COVE

DIMENSIONS

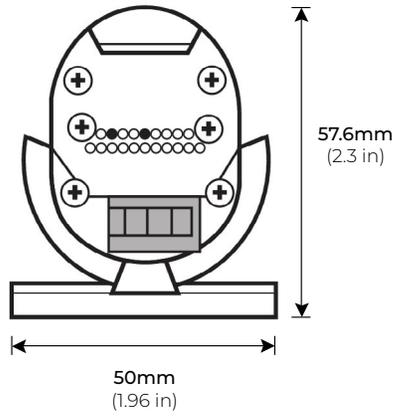

LUMENS

MODEL	CCT	Lumen/ FT	EFFICACY (lm/W)
SLG-4000	2200K	993	84.6
	2400K	1004	84.8
	2700K	1015	85.3
	3000K	1026	86.2
	3500K	1038	87.2
	4000K	1045	87.8
	5000K	1056	88.3

COMPATIBLE ACCESSORIES

SLG-LNK-12
12" LINK CABLE

SLG-LNK-60
60" LINK CABLE

SLG-HWC-120
120" HARDWIRE CABLE

