

# SLINQ


## FLEXIBLE 360° ROUND NEON SERIES

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

Set your creativity free and unleash the endless possibilities. Different mounting options allow for pendants, suspended mounts, flush mounts, arches and free form designs. The 360° light source gives illumination no matter how the fixture is mounted. Discover what you can create with the **SLINQ** Neon Series.

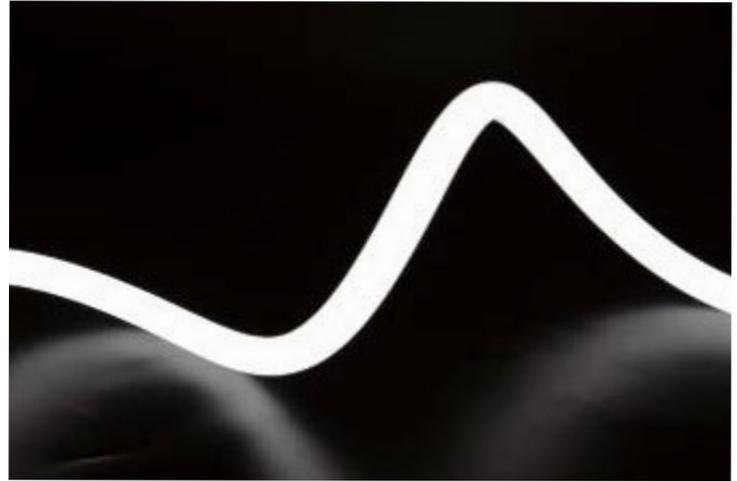

### SPECIFICATIONS

POWER CONSUMPTION	4.4W per foot
LUMEN OUTPUT	317 Lm/ Ft. (30K)
CRI	90+
COLOR TEMPERATURE	24K/ 27K/ 30K/ 35K/ 40K/ 50K
MAXIMUM RUN LENGTH	16 Ft. (24V) / 65 Ft. (48V)
OPERATING VOLTAGE	24V / 48V
STORAGE TEMPERATURE	-30°C to 60°C
OPERATING TEMPERATURE	30°C (-22°F) to 55°C (131°F)
BEAM ANGLE	360°
IP RATING	IP65 Outdoor/ Wet Location
LUMEN MAINTENANCE	50,000 Hrs.

### FEATURES

- 360° Light Source
- Multiple Mounting Options
- Universal Dimming
- Available in 24V and 48V DC
- IP65 Outdoor Rated
- Factory-Installed Power Feed
- Injection Moulded End-Caps
- Ideal for Decorative, Retail, Artistic Lighting

*\*This product is factory-cut only. Do not field modify.*






MODEL	COLOR TEMP	LENGTH	VOLTAGE	POWER FEED	MOUNTING OPTIONS
SLQ25-FX	<b>24K</b> 2400K	<b>1PF</b> Per Foot	<b>24V</b> 24 Volts	<b>EF72</b> 72" End Feed	<b>AR</b> Arch
	<b>27K</b> 2700K		<b>48V</b> 48 Volts	<b>SF72</b> 72" Side Feed	<b>SF</b> Surface Pendant
	<b>30K</b> 3000K				<b>SUP</b> Suspended Pendant
	<b>35K</b> 3500K				<b>SCS</b> Suspension Cable Support
	<b>40K</b> 4000K				<b>SJS</b> Suspension Joiner Support
	<b>50K</b> 5000K				<b>TES</b> Telescopic Extension Support
				<b>TJS</b> Telescopic Joiner Support	
		*1 = Custom length per FT.  (24V - Every 0.47") (48V - Every 3.28")		<b>*MAX RUN:</b> 24V - 16 Ft. 48V - 65 Ft.	

# SLINQ




## FLEXIBLE 360° ROUND NEON SERIES

### MOUNTING OPTIONS




#### ARCH (AR)

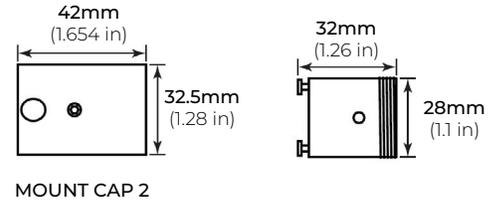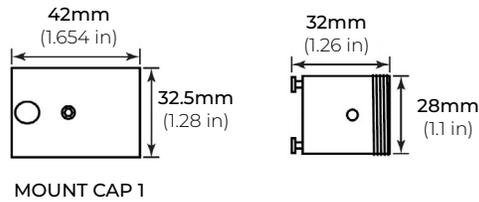




#### SURFACE PENDANT (SF)

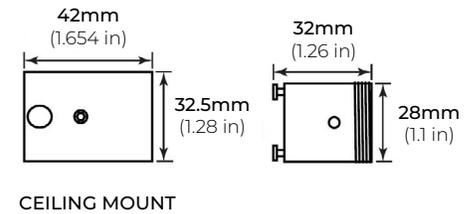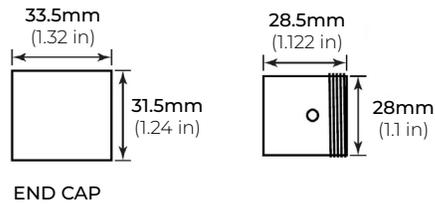

#### SUSPENDED PENDANT (SUP)

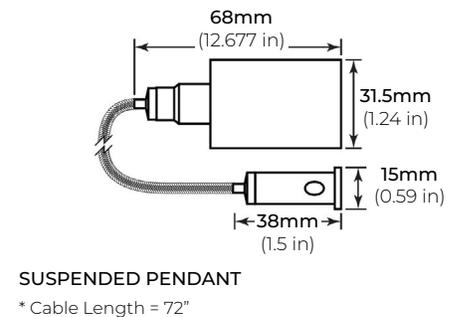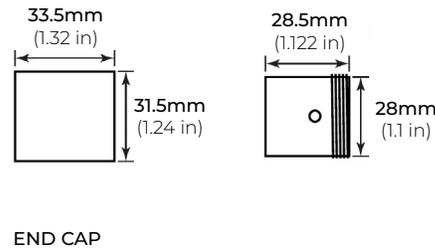

#### SUSPENSION CABLE SUPPORT (SCS)

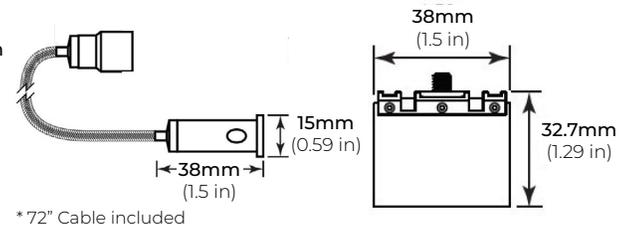


# SLINQ


## FLEXIBLE 360° ROUND NEON SERIES

### MOUNTING OPTIONS


#### SUSPENSION JOINER SUPPORT (SJS)

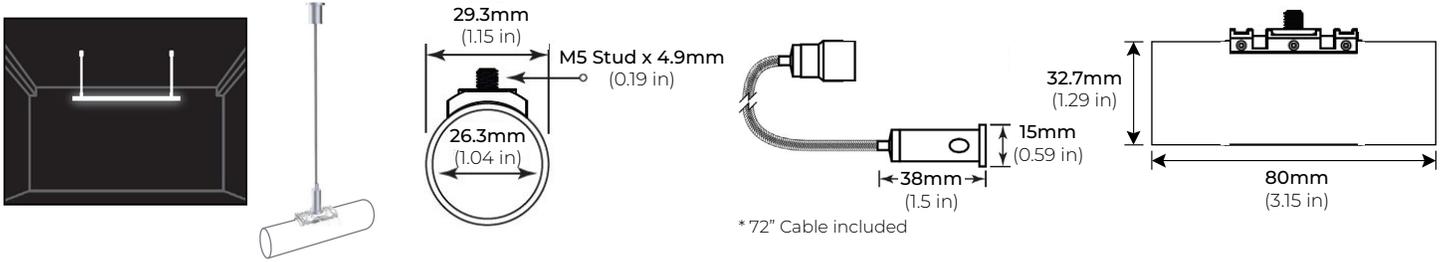

#### TELESCOPIC EXTENSION SUPPORT (TES)

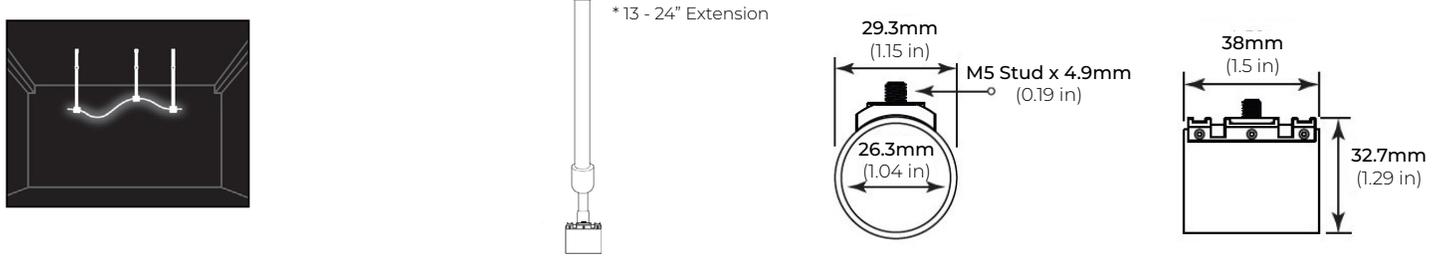

#### TELESCOPIC JOINER SUPPORT (TJS)

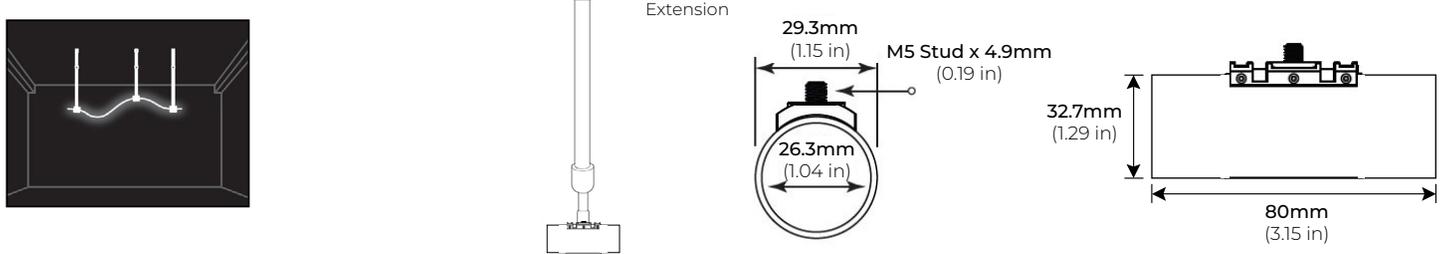

## FLEXIBLE 360° ROUND NEON SERIES

### ACCESSORIES


**SLQ25-RSM-WH**  
WHITE RECESSED MOUNT KIT  
Ø64MM x 20mm (D x H)




**SLQ25-TSM-WH**  
WHITE TRIMLESS MOUNT KIT  
Ø62MM x 20mm (D x H)





**SLQ25-VMC**  
VISIBLE MOUNTING CLIP



**SLQ25-DMB**  
DISCREET MOUNTING BRACKET

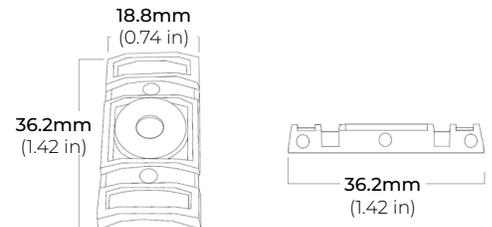

**SLQ25-IJ**  
INFINITY JOINER

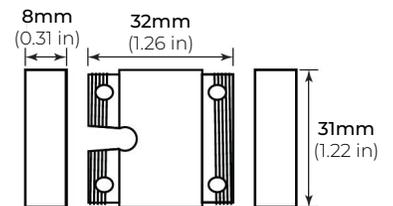



# SLINQ

## FLEXIBLE 360° ROUND NEON SERIES




### ACCESSORIES

SLQ25-RTS-39-S  
39" RIGID TUBE

SLQ25-RTS-78-S  
78" RIGID TUBE

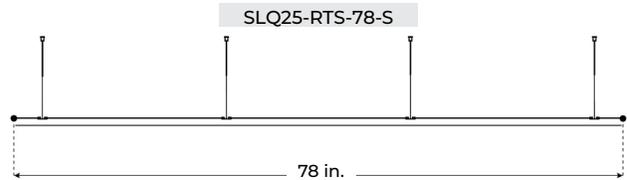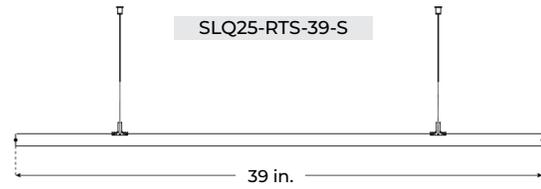

### DIMENSIONS

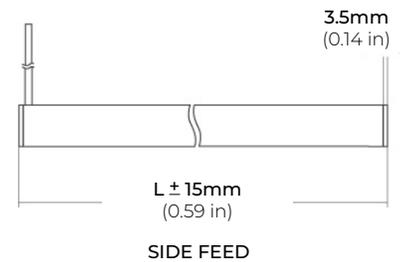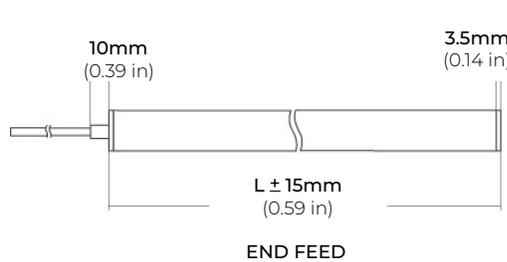


## FLEXIBLE 360° ROUND NEON SERIES

### COMPATIBLE 24V TRANSFORMERS


#### PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-96W-24V	CLASS 2	8.67" X 3.67" X 1.62"
PSDL-150W-24V		10.25" X 4.06" X 1.82"
PSDL-192W-24V	CLASS 2	11" X 4" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

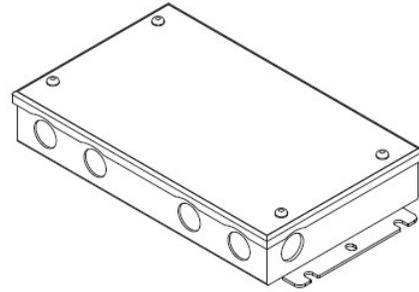


#### PSDH SERIES HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

PSDH-48W-24V	CLASS 2	11.25" X 3.38" X 3.38"
PSDH-96W-24V	CLASS 2	11.25" X 3.38" X 3.37"
PSDH-288W-24V	CLASS 2	14.25" X 8.43" X 4.43"

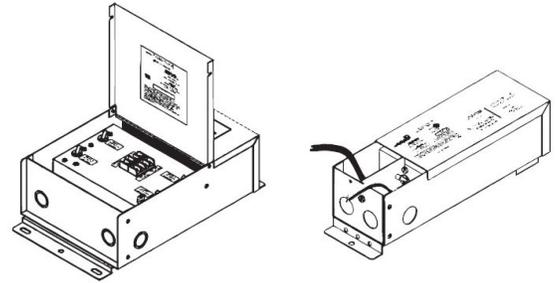


#### PSRX SERIES 4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-30W-24V-UNV	CLASS 2	6.5" X 3.7" X 1.57"
PSRX-60W-24V-UNV	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V-UNV	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-192W-24V-UNV	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-288W-24V-UNV	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V-UNV		10.94" X 4.33" X 1.77"

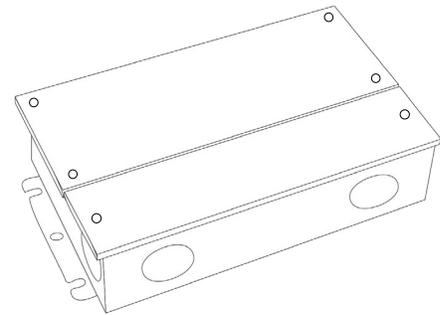

#### LUTRON 1% 3-WIRE DIMMING

L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
------------------	---------	--------------------

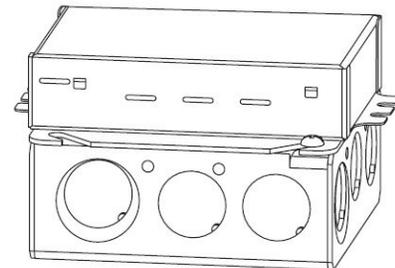


## FLEXIBLE 360° ROUND NEON SERIES

### COMPATIBLE 24V TRANSFORMERS

LUTRON 1%

PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"




### COMPATIBLE 24V NON-DIMMING DRIVERS

PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

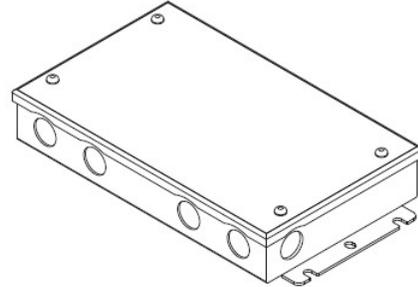

### COMPATIBLE 48V TRANSFORMERS

PSRX SERIES

4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-200W-48V-UNV	10.24" X 4.13" X 1.77"
PSRX-300W-48V-UNV	10.24" X 4.13" X 1.77"

