

ULM-120

3W 12V MINI RECESSED LED DOWNLIGHT

Project _____
Location _____
Quote/ Ref # _____

ULM-120 is a mini, 12V, low-profile recessed LED downlight capable of delivering 225 Lumens of light output. This 3-watt mini downlight is available in warm white or cool white and a variety of color finishes. Designed to replace halogen lighting, this downlight is an energy efficient lighting solution suitable for most indoor applications.



SPECIFICATIONS

INPUT VOLTAGE	12V DC
POWER CONSUMPTION	3W
LUMEN OUTPUT	225 Lumens
BEAM ANGLE	30°
COLOR TEMPERATURE	30K/ 40K
CRI	85+
DIMMING	10-100% with most CFL/LED and ELV's
MOUNTING	Recessed
CUTOUT	1 1/4"
OPERATING TEMPERATURE	-4 ~ 122°F (-20 ~ 50°C)
AMBIENT TEMPERATURE	-4 ~ 176°F (-20 ~ 80°C)
LUMEN MAINTENANCE	50,000 hrs.
CONNECTION	20" length cord with quick connector
WARRANTY	3-Year Limited

FEATURES

- 12V DC
- Dimmable
- Energy savings of 85% compared to halogen
- Great for displays, cabinets and showcases




MODEL	COLOR TEMP	FINISH	VOLTAGE
ULM120	30K 3000K	WH White	12 12V
	40K 4000K	BK Black	
	SI Silver		

ULM-120

3W 12V MINI RECESSED LED DOWNLIGHT


DIMENSIONS

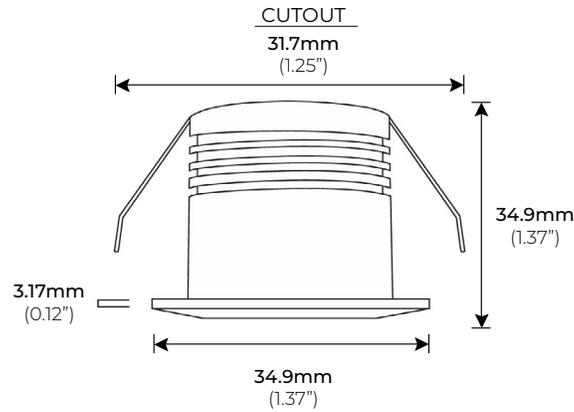

COMPATIBLE TRANSFORMER

PSDL SERIES TRIAC DIMMABLE

PSDL-30W-12V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-12V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-100W-12V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-12V		10.25" X 4.06" X 1.82"
PSDL-200W-12V		10.25" X 4.06" X 1.82"
PSDL-300W-12V		10.25" X 4.06" X 1.82"

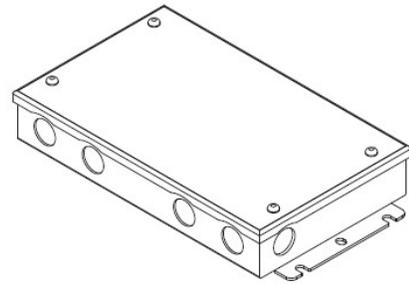

PSRX SERIES 4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-30W-12V-UNV	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-12V-UNV	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-150W-12V-UNV		10.24" X 4.13" X 1.77"

