

# CIRCA-UNO

## LED PENDANT

Project \_\_\_\_\_  
Location \_\_\_\_\_  
Quote/ Ref # \_\_\_\_\_

The **CIRCA-UNO Series** LED Ring pendant is an elegant circle LED lighting fixture that complies with current market and installation standards. Its unique structure makes installation fast and easy with connections hassle-free. The high efficiency lens diffuser provides a bright and even light. Available in different sizes and color temperatures. Ideal for offices, schools, hospitals, supermarkets, shopping malls, hotels and public areas.



### SPECIFICATIONS

INPUT VOLTAGE	110 - 277V
POWER CONSUMPTION	35W   55W   75W   97W
SIZES	24"   36"   48"   60"
LUMEN OUTPUT	650 Lm/ Ft. — 90 Lm/ W
CRI	90+
COLOR TEMPERATURE	27K/ 30K/ 35K/ 40K/ 50K
LED EFFICIENCY	120-130 Lm/W
DIMMING	MLV, ELV, 0-10 and TRIAC
OPERATING TEMPERATURE	-40°F (-40°C) to 140°F (60°C)
BINNING	1.5 Step Macadam Eclipse
BEAM ANGLE	120°
IP RATING	IP54 Indoor
DIFFUSER	Silicone, 80% Transmittance
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs

### FEATURES

- 650 Lm./ Ft.
- 90+ CRI
- Pure aluminum body
- Suspension Fixture
- Suitable for accent or ambient lighting
- Multiple CCT options available
- UL Listed (US and Canada)
- Dimmable with CORE Lighting dimmable drivers




MODEL	SIZE	COLOR TEMP	FINISH	DRIVER
CSR200	<b>24</b> 24 In.   35W	<b>27K</b> 2700K	<b>WH</b> White	<b>EB</b> TRIAC/ ELV Dimming
	<b>36</b> 36 In.   55W	<b>30K</b> 3000K	<b>BK<sup>1</sup></b> Black	<b>D10</b> 0-10V Dimming
	<b>48</b> 48 In.   75W	<b>35K</b> 3500K	<b>SI<sup>2</sup></b> Silver	<b>HL3E</b> Lutron ECO 3-Wire
	<b>60</b> 60 In.   97W	<b>40K</b> 4000K		
		<b>50K</b> 5000K		

1 = Quick Ship  
2 = 5 weeks lead time

# CIRCA-UNO

## LED PENDANT


### DIMENSIONS

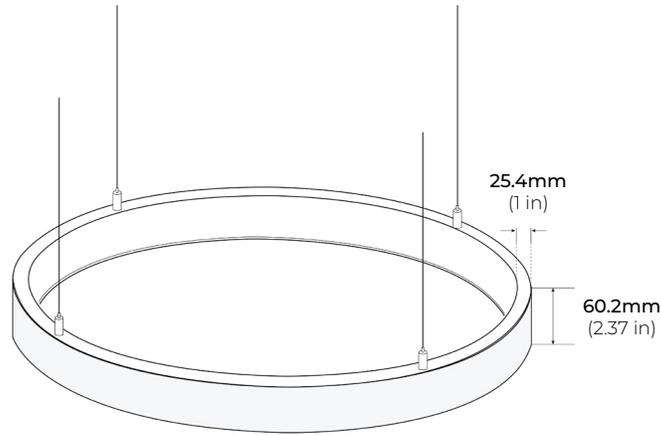

### COMPATIBLE DRIVERS


#### PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.03"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.03"
PSDL-96W-24V	CLASS 2	8.67" X 3.67" X 1.62"
PSDL-150W-24V		8.67" X 3.67" X 1.62"
PSDL-192W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

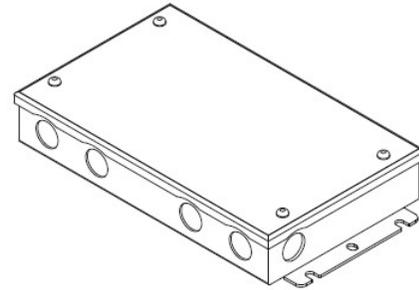


#### PSRX SERIES 4-IN-1 DIMMING DRIVER

PSRX-30W-24V	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V		10.24" X 4.13" X 1.77"
PSRX-192W-24V	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V		10.24" X 4.13" X 1.77"
PSRX-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V		10.94" X 4.33" X 1.77"

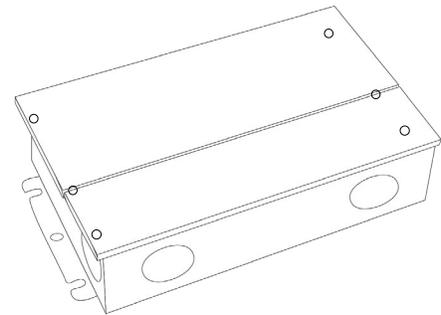

#### PSVT SERIES 0-10V DIMMING DRIVER

PSVT-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSVT-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSVT-200W-24V		10.24" X 4.13" X 1.77"
PSVT-288W-24V	CLASS 2	11.85" X 4.25" X 1.81"
PSVT-300W-24V		10.94" X 4.33" X 1.77"

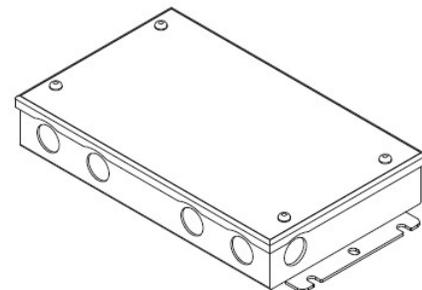

# CIRCA-UNO


## LED PENDANT

### COMPATIBLE DRIVERS

#### PSDE SERIES

0-10V DIMMING W/ JUNCTION BOX


PSDE-60W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"
PSDE-96W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"

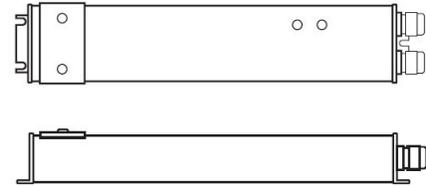

#### LUTRON 1%


3-WIRE DIMMING

L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
------------------	---------	--------------------

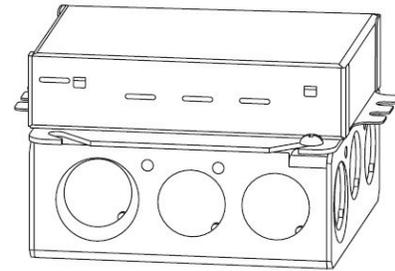

#### LUTRON 1%

PSDE-96W-24V-ECO	CLASS 2	10.5" X 3.0" X 2.0"
------------------	---------	---------------------



### COMPATIBLE NON-DIMMING DRIVERS

#### PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

