

SLINQ WALL


MINI FLEXIBLE 360° ROUND NEON SERIES

Project _____

Location _____

Quote/ Ref # _____

Set your creativity free and explore endless possibilities with the **Slinq Wall** Neon Series. Designed for wall-mounted applications, its flexible form and 360° light output deliver smooth, consistent illumination from every angle.

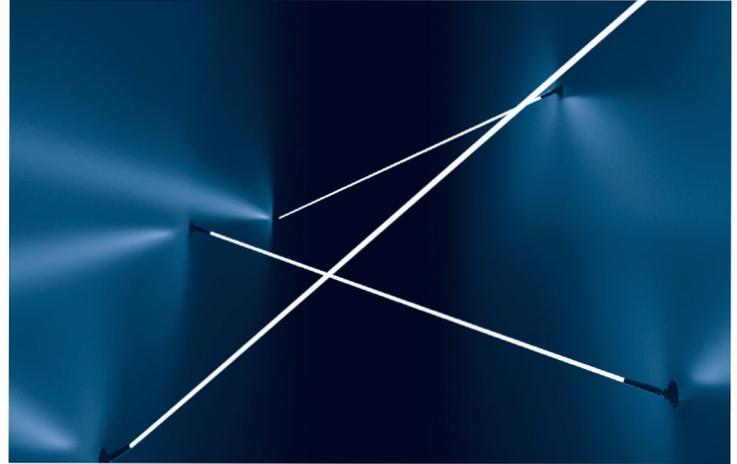

SPECIFICATIONS

POWER CONSUMPTION	4W per Ft.
LUMEN OUTPUT	213 Lm/ Ft.
CRI	90+
COLOR TEMPERATURE	23K/ 27K/ 30K/ 43K
MAXIMUM RUN LENGTH	16.4 Ft. (24V) 32.8 Ft. (48V)
OPERATING VOLTAGE	24V/ 48V
STORAGE TEMPERATURE	0°C (0°F) to 60°C (140°F)
OPERATING TEMPERATURE	-25°C (-13°F) to 55°C (131°F)
BEAM ANGLE	360°
IP RATING	IP65 Outdoor/ Wet Location
LUMEN MAINTENANCE	50,000 Hrs.

FEATURES

- 360° Light Source
- Universal Dimming
- Available in 24V and 48V DC
- IP65 Outdoor Rated
- Factory-Installed Power Feed
- Injection Moulded End-Caps
- Ideal for Decorative, Retail, Artistic Lighting

*This product is factory-cut only. Do not field modify.



MODEL	LENGTH	COLOR TEMP	VOLTAGE	POWER FEED
SLQ15W	1PF Per Foot	23K 2300K 27K 2700K 30K 3000K 43K 4300K	24V 24 Volts 48V 48 Volts	EF72 72" End Feed
	*1 = Custom length per FT. (24V - Every 0.98") (48V - Every 1.97")			*MAX RUN: 24V - 16.4 Ft. 48V - 32.8 Ft.

SLINQ WALL

MINI FLEXIBLE 360° ROUND NEON SERIES


ACCESSORIES

DOUBLE-END SUSPENSION KIT


SLQ15W-MS-BK
BLACK DOUBLE-END SUSPENSION KIT

SLQ15W-MS-WH
WHITE DOUBLE-END SUSPENSION KIT


*SCREWS INCLUDED

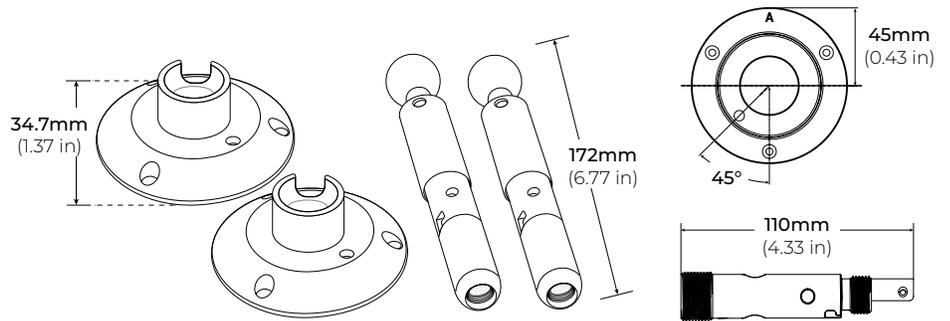

DIMENSIONS

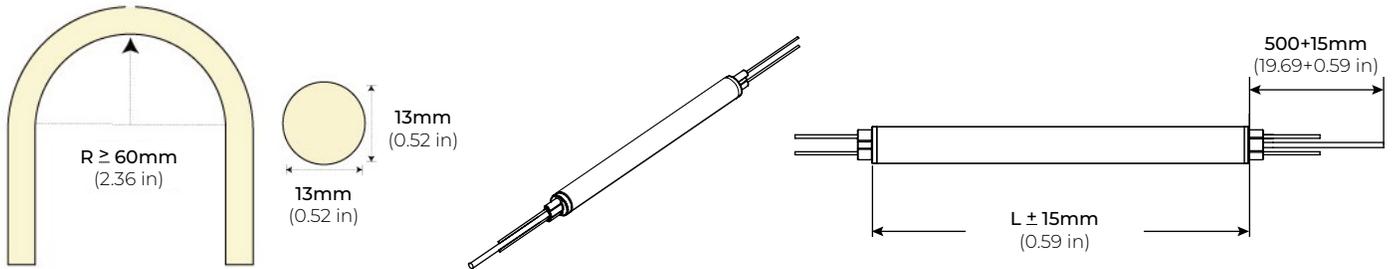

LIGHT DISTRIBUTION

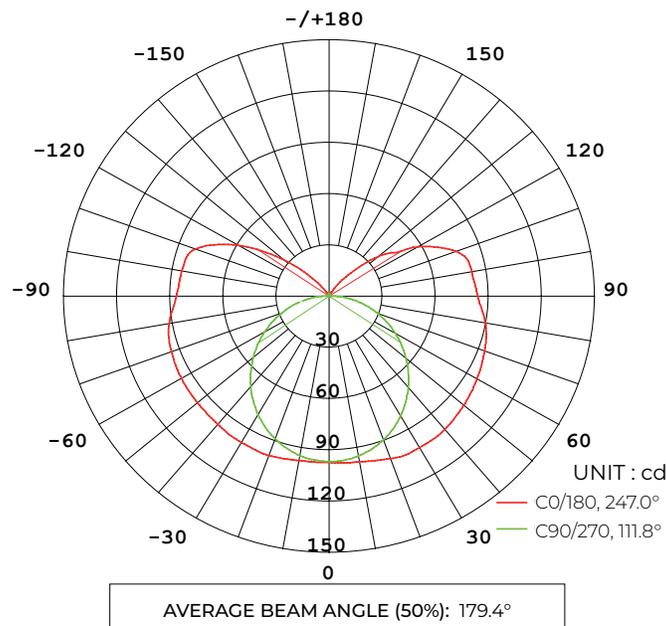


SLINQ WALL

MINI FLEXIBLE 360° ROUND NEON SERIES

COMPATABLE 24V TRANSFORMERS


PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		10.25" X 4.06" X 1.82"
PSDL-192W-24V	CLASS 2	11" X 4" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

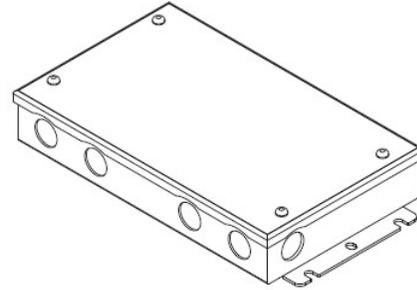


PSDH SERIES HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

PSDH-48W-24V	CLASS 2	11.25" X 3.38" X 3.38"
PSDH-96W-24V	CLASS 2	11.25" X 3.38" X 3.37"
PSDH-288W-24V	CLASS 2	14.25" X 8.43" X 4.43"

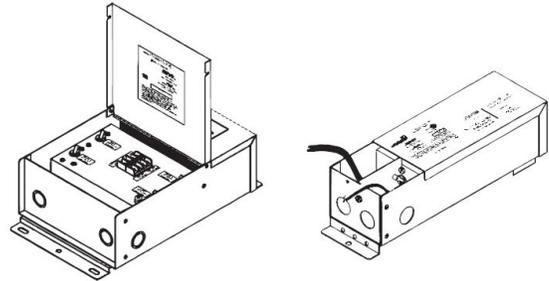

PSRX SERIES 4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-30W-24V	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V		10.24" X 4.13" X 1.77"
PSRX-192W-24V	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V		10.24" X 4.13" X 1.77"
PSRX-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V		10.94" X 4.33" X 1.77"

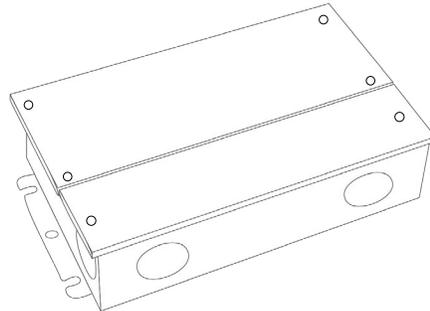


SLINQ WALL

MINI FLEXIBLE 360° ROUND NEON SERIES


COMPATABLE 24V TRANSFORMERS

LUTRON 1%
3-WIRE DIMMING

L3DA4U1UKL-CV240 CLASS 2 4.89" X 4" X 2.62"

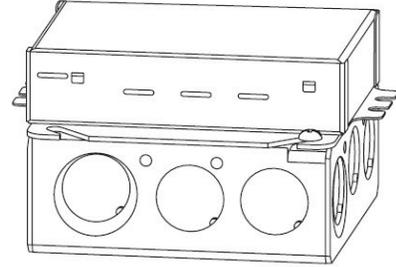


PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



COMPATABLE 24V NON-DIMMING DRIVERS

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

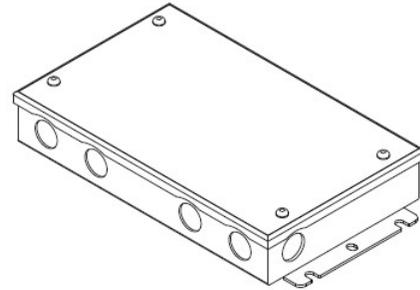

COMPATABLE 48V TRANSFORMERS

PSRX SERIES
4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-200W-48V-UNV	10.24" X 4.13" X 1.77"
PSRX-300W-48V-UNV	10.24" X 4.13" X 1.77"

