ALP-120

CLOSET ROD LINEAR LED LUMINAIRE

CORE
ARCHITECTURAL
LIGHTING

Project _____
Location _____
Quote/ Ref # _____

Introducing a multi-functional LED lighting fixture designed to enhance your closet space. It functions as a sturdy clothing rod to hang your wardrobe and an attractive light source for your closet. It is also sized based on industry standards making it easy to retrofit into existing installations.
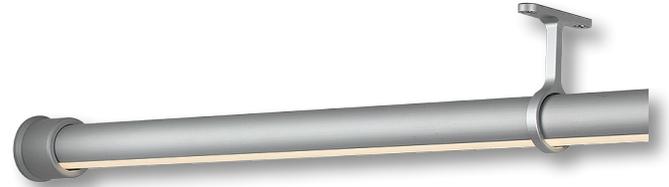
SPECIFICATIONS

INPUT VOLTAGE	24V DC Constant Voltage
POWER CONSUMPTION	3W | 4W | 5W
LUMEN OUTPUT	250 Lm/ Ft. (3W) 440 Lm/ Ft. (4W) 595 Lm/ Ft. (5W)
NO. OF LEDS	36 LEDs per Ft.
BEAM ANGLE	120° Spread
CRI	90+
COLOR TEMPERATURE	27K/ 30K/ 35K/ 40K/ 50K
DIMMING	MLV, ELV, 0-10 and TRIAC
MAX RUN LENGTH	8 Ft.
MAX WEIGHT	400 lbs.
OPERATING TEMPERATURE	-40°F (-40°C) ~ 140°F (60°C)
IP RATING	Indoor (Dry Location)
CERTIFICATIONS	UL Listed, Certified UL2108, TITLE 24 JA8 Compliant
LUMEN MAINTENANCE	50,000 Hrs.
WARRANTY	5-Year Limited

FEATURES

· Superior Color Rendering Index (CRI)
· Less than 1.7" Diameter
· Dimmable
· UL Listed (US and Canada), Certified UL2108
· Approved for closet/ storage space installation per NEC 410. 16(A)(3) and 410. 16 (C)(5)
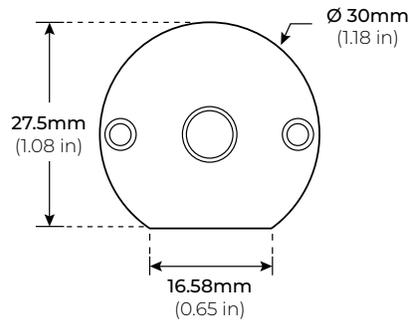
INDOOR 90+ CRI DIMMABLE c(UL)us LISTED 3 YEAR WARRANTY

MODEL	SIZE	WATT	COLOR TEMP	VOLT	FINISH	DRIVER
ALP-120	**4** 4Ft.	**L1** 3W/ FT	**27K** 2700K	**24** 24V DC	**SI** Silver	**EB** PSDL Series TRIAC ELV Dimming
	8 8Ft.	**L2** 4W/ FT	**30K** 3000K		**BZ** Bronze	**D10** PSDE-96W-24-010JB 0-10V Dimming
	¹CUSXX Custom Length	**L3** 5W/ FT	**35K** 3500K		***BK** Black	**HL3E** Lutron ECO 3-Wire
			40K 4000K		***WH** White	**ND** Non Dimming
			50K 5000K			
	*1 = Custom length per in.				* Powder Coating (Allow 2 Weeks Lead Time)	

ALP-120

CLOSET ROD LINEAR LED LUMINAIRE

CORE
ARCHITECTURAL
LIGHTING

UPDATED: 02.27.26

DIMENSIONS

Ø 30mm
(1.18 in)

27.5mm
(1.08 in)

16.58mm
(0.65 in)

ASSEMBLY

ALP120-MF
*Includes hole for wiring

ALP120-EC
End cap without Hole

Profile

Frosted Lens

Wall Bracket

ALP-120
CLOSET ROD LINEAR LED LUMINAIRE

CORE
ARCHITECTURAL
LIGHTING

UPDATED: 02.27.26
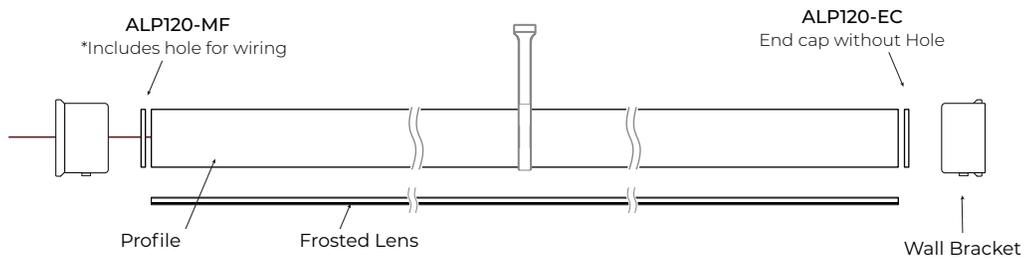
ACCESSORIES

ALP120-MF
WALL MOUNT BRACKET
2 pcs. per kit

* Sold Separately

Ø 44mm
(1.73 in)

30mm
(1.18 in)

5.1mm
(0.2 in)

24.9mm
(0.98 in)
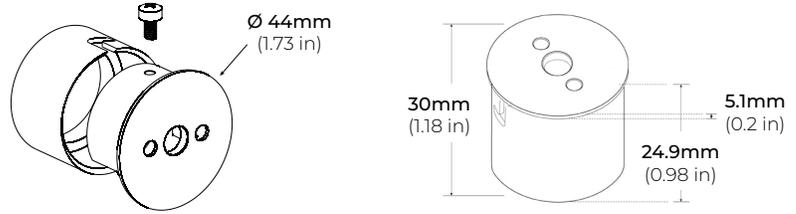
ALP120-EC
END CAP
2 pcs. per kit
Included in ALP120-MF

Ø 6.4mm
(0.25 in)
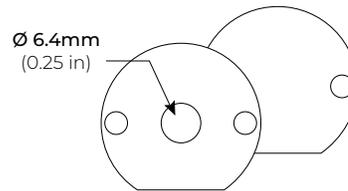
ALP120-HS
WALL MOUNT SUPPORT
1 pc. recommended every 4 Ft.

* Sold Separately

80mm
(3.15 in)

Ø 36.5mm
(1.44 in)

18.3mm
(0.72 in)
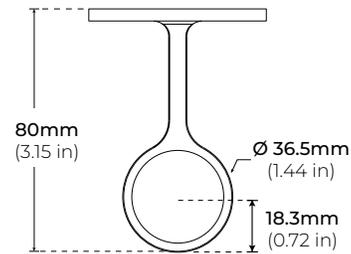
ALP120-CMB
CEILING MOUNTING BRACKET
2 pcs. per kit.
Only available in silver and bronze

* Sold Separately

34mm
(1.34 in)

19.1mm
(0.75 in)

95.5mm
(3.76 in)

Ø 30.2mm
(1.19 in)
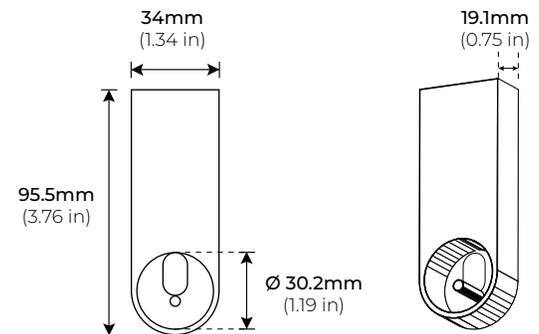
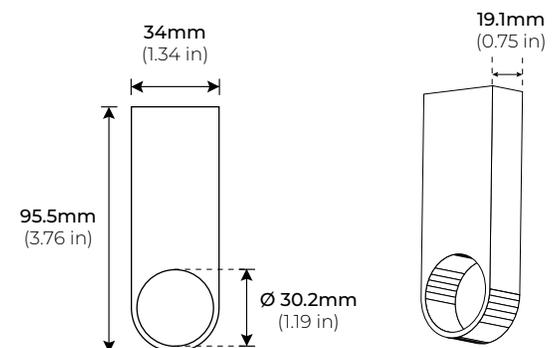**ALP120-CPS**
CEILING MOUNT SUPPORT
1 pc. recommended every 4 Ft.
Only available in silver and bronze

* Sold Separately

34mm
(1.34 in)

19.1mm
(0.75 in)

95.5mm
(3.76 in)

Ø 30.2mm
(1.19 in)

ALP-120

CLOSET ROD LINEAR LED LUMINAIRE

CORE
ARCHITECTURAL
LIGHTING

COMPATIBLE TRANSFORMERS

PSDL SERIES
TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		10.25" X 4.06" X 1.82"
PSDL-192W-24V	CLASS 2	11" X 4" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"
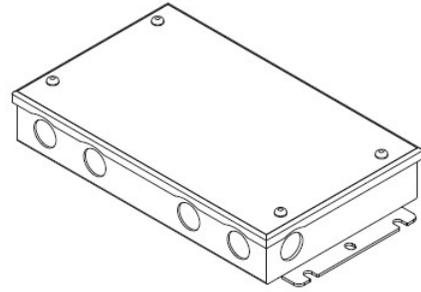
PSDE SERIES
0-10V DIMMING W/ JUNCTION BOX

PSDE-96W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"
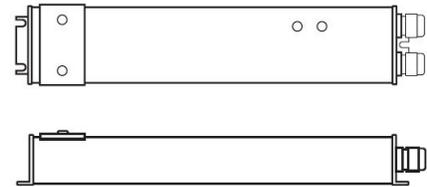
LUTRON 1%
3-WIRE DIMMING

L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
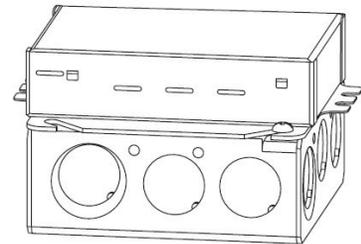
PSDE-96W-24V-ECO	CLASS 2	10.5" X 3.0" X 2.0"

ALP-120

CLOSET ROD LINEAR LED LUMINAIRE

CORE
ARCHITECTURAL
LIGHTING

UPDATED: 02.27.26
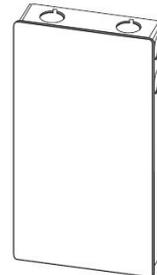
NON-DIMMING DRIVERS (COMPATABLE WITH ALL SYSTEMS)

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.94" X 4.25" X 1.81"