

# ULX SERIES

## 120V 0-10V DIMMING UNDERCABINET LED FIXTURE

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

The **ULX SERIES** combines style and efficiency eliminating hot spots for a smooth, seamless and uniform beam of light. Its intuitive design adds functionality and a vibrant atmosphere to your kitchen or design space and illuminating shadows and dark corners. It creates a warm, soft, ambient glow with its dimmable feature.



### SPECIFICATIONS

INPUT VOLTAGE	120-277V AC
POWER CONSUMPTION	7W per Ft.
LUMEN OUTPUT	490 Lumens per Ft.
CRI	90+
COLOR TEMPERATURE	27K/ 30K/ 40K
MAXIMUM RUN LENGTH	Linkable up to 300W
MOUNTING	Surface
DIMMING	0-10V
POWER FACTOR	≥ 0.9
OPERATING VOLTAGE	120V
OPERATING TEMPERATURE	14°F (-10°C) to +104°F (+40°C)
CERTIFICATIONS	ETL Listed, TITLE 24 JA8
LUMEN MAINTENANCE	50,000 Hrs.
DIMENSIONS	28 x 24mm (1.1 x 0.94") (WxH)

### FEATURES

- 120V AC, No transformer required
- Dimmable with 0-10V Dimmers
- Linkable up to 300W
- Selectable CCT
- Superior color rendering index 90CRI
- Seamless Connector included
- 5 Different Sizes Available
- Premium Diffusion, No Hot Spots

MODEL	ULX1018	ULX1024	ULX1032	ULX1048
LENGTH	18"	24"	32"	48"
WATTS	10W	13.5W	17W	27W
LUMENS	700	945	1150	1890




MODEL	LENGTH	FINISH	VOLTAGE	OPTIONS
ULX	1018 18"	WH White	UNV 120-277V	MS* Motion Sensor
	1024 24"			
	1032 32"			
	1048 48"			

\*Custom.  
Minimum Order (Qty. 50)  
required. Allow 4 weeks  
lead time.

# ULX SERIES

## 120V 0-10V DIMMING UNDERCABINET LED FIXTURE

### DIMENSIONS

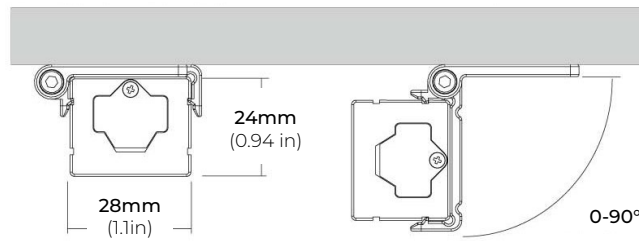

### COMPATIBLE ACCESSORIES

**ULX-PCA-72-WH** (white)  
72" AC DIRECT PLUG IN POWER FEED CABLE



**ULX-HWC-72-WH** (white)  
72" HARDWIRE POWER FEED CABLE



**ULX-SMC-WH** (white)  
SEAMLESS COUPLING  
\* INCLUDED WITH EACH FIXTURE



**ULX-LNK6-WH** (white)  
6" INTER LINK CABLE

**ULX-LNK12-WH** (white)  
12" INTER LINK CABLE

**ULX-LNK24-WH** (white)  
24" INTER LINK CABLE

**ULX-LNK72-WH** (white)  
72" INTER LINK CABLE



**ULX-BKT-WH**(white)  
MOUNTING BRACKET  
\* INCLUDED WITH EACH FIXTURE



# ULX SERIES

## 120V 0-10V DIMMING UNDERCABINET LED FIXTURE

### COMPATIBLE ACCESSORIES

---

#### ULX-CBT-WH (white)

SUPPORT BRACKET FOR SEAMLESS CONNECTION  
\* INCLUDED WITH EVERY FIXTURE



---

#### ULD-JBS-WH (white)

DIRECT WIRE JUNCTION BOX  
6.25" x 3.6" x 1.0" (L x W x H)

