

LPX-80 RGBW

120V-277V RGBW INDOOR/ OUTDOOR ACCENT LIGHT

Project _____
Location _____
Quote/ Ref # _____

The **LPX-80 RGBW** is an RGBW 120V LED linear luminaire ideal for media facades and delineation of largescale structures such as bridges and towers. IP66-rated for outdoor applications, the linear bar's acrylic square or rounded diffuser lenses produce perfectly uniform and saturated light.



SPECIFICATIONS

INPUT VOLTAGE	120V-277V
POWER CONSUMPTION	6W per Ft.
LUMEN OUTPUT	Up to 150 Lm/ Ft.
BEAM ANGLE	160°
CRI	85+
COLOR TEMPERATURE	RGB+30K RGB+40K
DIMMING/ CONTROL	DMX
MAXIMUM RUN LENGTH	71 Ft. (120V) 157 Ft. (277V)
IP RATING	IP66 Wet Location Rated
AMBIENT TEMPERATURE	-4°F (-20°C) to 122°F (50°C)
LUMEN MAINTENANCE	50,000 Hrs.
CERTIFICATIONS	ETL Listed

FEATURES

- 120V-277V
- 6W per Ft
- 150 Lumens per Ft.
- DMX Control
- IP66 Wet Location
- ETL Listed (US and Canada)



MODEL	LENGTH	COLOR TEMP	MOUNTING	LENS	FINISH	CONTROL
LPX80	24 24.21 in. 12W	RGBW30K RGB + 3000K	STD Adjustable Mounting	SQ Square	GR Grey	DMX DMX
	48 48.03 in. 24W	RGBW40K RGB + 4000K	PIV Pivot Mounting	RN Round	CUS Custom Finish	

LPX-80 RGBW


120V-277V RGBW INDOOR/ OUTDOOR ACCENT LIGHT

MOUNTING OPTIONS


LPX80-STD
ADJUSTABLE MOUNTING



LPX80-PIV
PIVOT MOUNTING

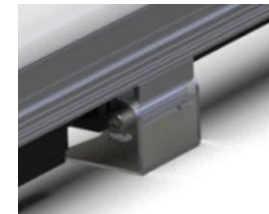


DIMENSIONS

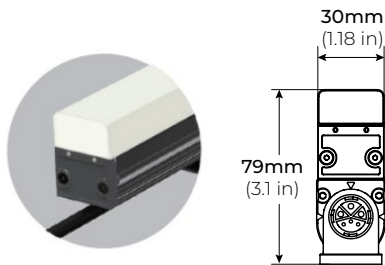


SQUARE LENS

160°

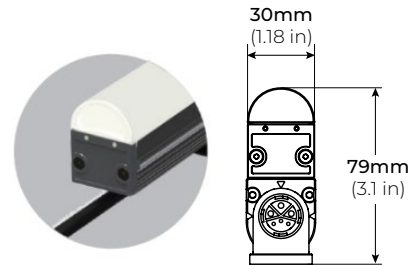


ROUND LENS

160°

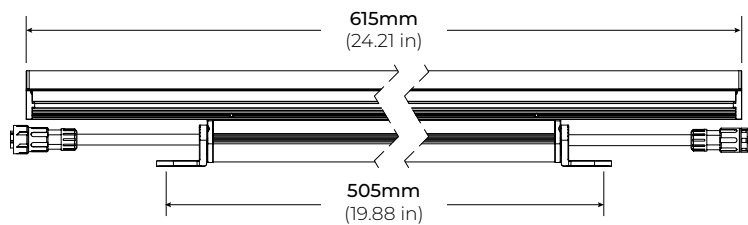

LPX80-24


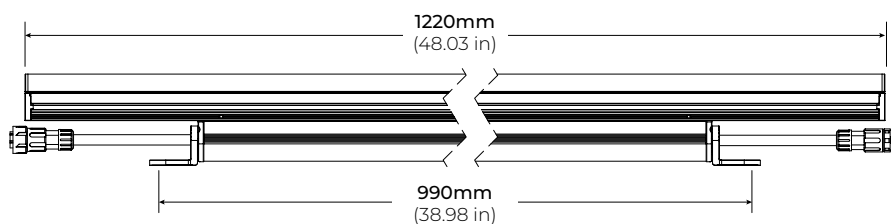


LPX80-48

LPX-80 RGBW

120V-277V RGBW INDOOR/ OUTDOOR ACCENT LIGHT

LIGHT DISTRIBUTION

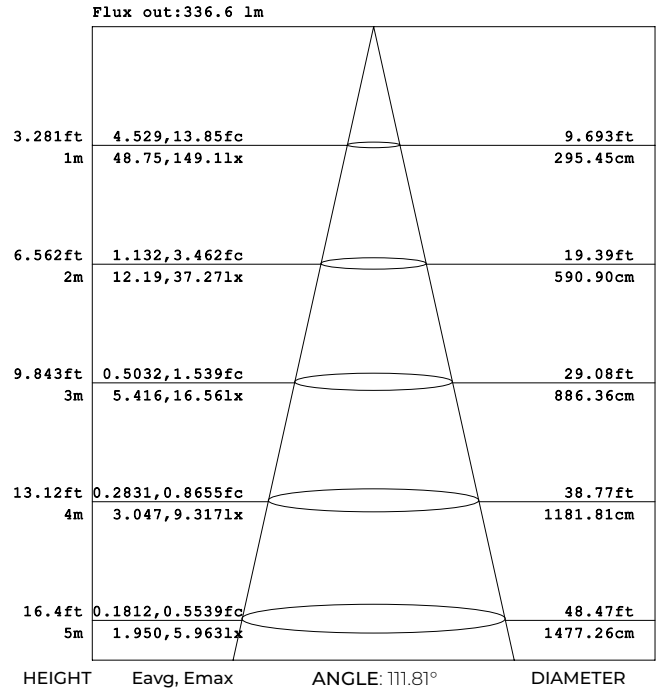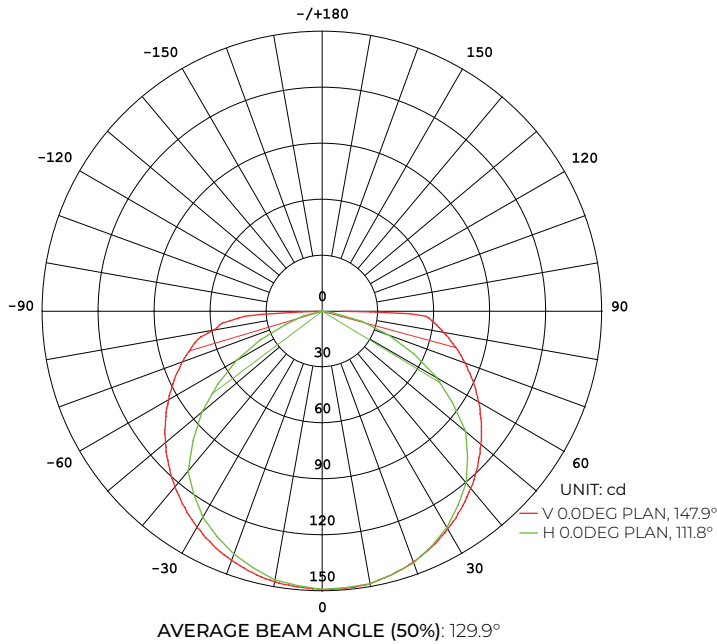

COMPATIBLE ACCESSORIES

LPX80-LNK-10-RGBW
 LPX80-LNK-36-RGBW
 LPX80-LNK-72-RGBW
 10", 36", 72" LINK EXTENSION CABLE
 *Sold Separately



LPX80-HWC-72-RGBW
 LPX80-HWC-120-RGBW
 72" AND 120" HARDWIRE CABLE
 *Sold Separately

