





# ECHO 300 SERIES

## 2.3" DIRECT/ INDIRECT LED LIGHTING SYSTEM


### DIMENSIONS




23.7" (Frosted/ Regressed) | 23.82" (Micro Reflector/ Louver)




35.71" (Frosted/ Regressed) | 35.63" (Micro Reflector/ Louver)




47.72" (Frosted/ Regressed) | 47.44" (Micro Reflector/ Louver)



95.24" (Frosted/ Regressed) | 94.69" (Micro Reflector/ Louver)



### PRODUCT OVERVIEW

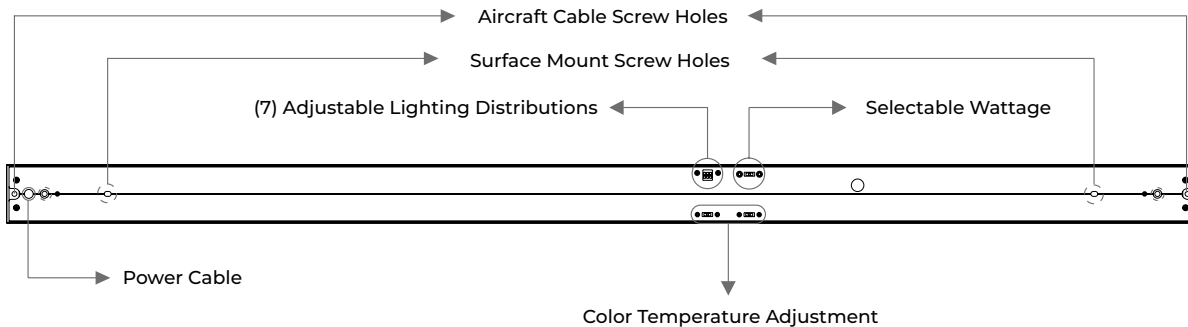


# ECHO 300 SERIES


## 2.3" DIRECT/ INDIRECT LED LIGHTING SYSTEM

### LENS OPTIONS


FR  
FROSTED



LV  
LOUVER




RG  
REGRESSED




MR  
MICRO REFLECTOR

\*Only available for Surface and Suspended Mount



WW  
WALL WASHER

\*Only available for Surface and Suspended Mount



# ECHO 300 SERIES

## 2.3" DIRECT/ INDIRECT LED LIGHTING SYSTEM


### SUSPENSION KIT ACCESSORIES

\* Suspension kit accessories include a 10ft. suspension cable.

#### POWER FEED KIT

ALP-CF-WH  
WHITE POWER FEED KIT


ALP-CF-BK  
BLACK POWER FEED KIT

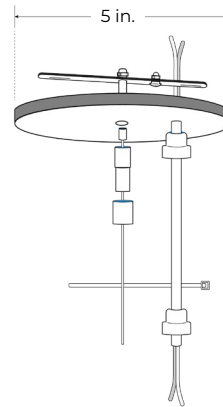

#### 2" NON-POWER FEED KIT

ALP-CSB-WH-2  
2" WHITE FEED KIT


ALP-CSB-BK-2  
2" BLACK FEED KIT



#### 5" NON-POWER FEED KIT

ALP-CSB-WH-5  
5" WHITE FEED KIT

ALP-CSB-BK-5  
5" BLACK FEED KIT




# ECHO 300 SERIES

## 2.3" DIRECT/ INDIRECT LED LIGHTING SYSTEM

### OPTIONAL ACCESSORIES

#### ECH-S300-ST STRAIGHT JOINER


\*Sold Separately

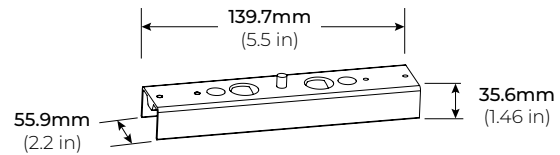

#### ECH-S300-TLJ "T-SHAPED" LINE JOINER

\*Sold Separately


\*Only available for Surface and Suspended Mount

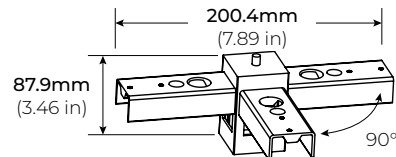

#### ECH-S300-LJ9 "L-SHAPED" LINE JOINER

\*Sold Separately


\*Only available for Surface and Suspended Mount



#### ECH-S300-L90 ILLUMINATED "L-SHAPE" JOINER

\*Sold Separately


\*Only available for Surface and Suspended Mount

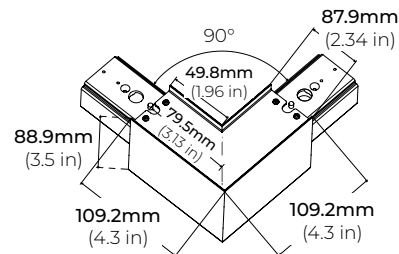

#### ECH-S300-XLJ "X-SHAPED" LINE JOINER

\*Sold Separately


\*Only available for Surface and Suspended Mount

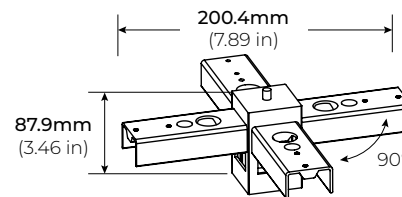

#### ECH-S300-YLJ "Y-SHAPED" LINE JOINER

\*Sold Separately


\*Only available for Surface and Suspended Mount

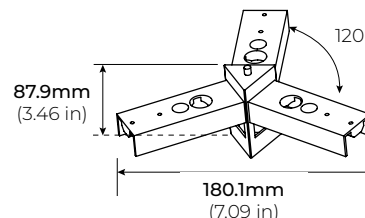

#### ECH-S300-VLJ "V-SHAPED" LINE JOINER

\*Sold Separately

\*Only available for Surface and Suspended Mount

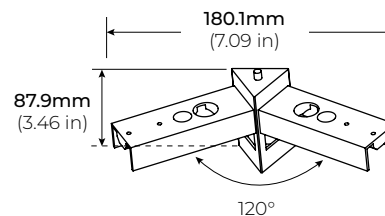

# ECHO 300 SERIES

## 2.3" DIRECT/ INDIRECT LED LIGHTING SYSTEM

### EMERGENCY LED BATTERY (EMEG)


When AC power fails, the Emergency LED Driver (EM) immediately switches to emergency mode; operating for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to charging mode.

\* One Emergency Battery Per Driver required.

LUMINAIRE LOAD POWER	60W (MAX.)
FIXTURE EFFICACY	110 Lm/W
STANDBY POWER	< 0.4W
EMERGENCY OPERATION	90 Minutes
OPERATING TEMPERATURE	0°F (0°C) ~ 122°F (50°C)
BATTERY	Lithium
RECHARGE	24 Hrs.
CERTIFICATIONS	UL Listed, CEC
DIMENSIONS	12.76" x 2.13" x 1.57" (LxWxH)



### DIMENSIONS

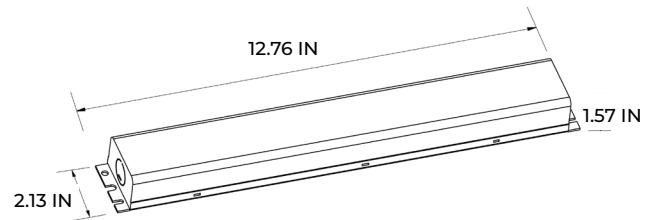


### INPUT

INPUT CURRENT (MAX.)	70 MA
INPUT POWER (MAX.)	3.2W
INPUT VOLTAGE RANGE	100-277V AC, 50-60Hz

### OUTPUT

OUTPUT VOLTAGE	170V DC
OUTPUT WATTAGE	8W
OUTPUT POWER	880 Lm (8W)



REMOTE