

# SLG-4000

## HIGH POWER INTERIOR LINEAR COVE

Project \_\_\_\_\_  
Location \_\_\_\_\_  
Quote/ Ref # \_\_\_\_\_

The **SLG-4000** linear cove / wall washer comes in high and standard outputs with multiple color temperature options. Its proprietary small, adjustable mounting and continuous run connectors make the SLG-4000 series suitable for any architectural, retail, hospitality and display applications.



### SPECIFICATIONS

OPERATING VOLTAGE	120V AC
OPERATING FREQUENCY	50Hz / 60 Hz
DRIVER	Internal / Built-in
POWER CONSUMPTION	11.9W (1ft)   47.7W (4ft)
DISTRIBUTION	10° x 10° / 10° x 60° / 30° x 60°
CRI	90+
COLOR TEMPERATURE	22K/ 24K/ 27K/ 30K/ 35K/ 40K/ 50K
DIMMING/ CONTROL	100-120V/ ELV
LENS	Clear Polycarbonate
CONNECTORS	Integral Male / Female 5 pin
MAXIMUM RUN LENGTH	48 Ft.
ENVIRONMENT	Indoor / Dry / Damp Location
OPERATING TEMPERATURE	14°F (-10°C) ~ 104°F (40°C)
STORAGE TEMPERATURE	40°F (-40°C) ~ 176°F (80°C)
MOUNTING OPTIONS	Adjustable 80° + 80°
CERTIFICATIONS	ETL, Conforms to UL STD 1598, Certified to CSA STD C2.2 NO.250.0-08

### FEATURES

- Up to 1000+ Lumens per foot
- Up to 90+ Lumens per Watt
- Proprietary Optical Technology
- ELV Dimming
- Small Profile Fixture
- Continuous Run Capability
- Proprietary Adjustable Mounting Bracket
- Facade Wall Washing
- Graze Lighting
- Signage




MODEL	LENGTH	COLOR TEMP	OPTICS	VOLTAGE	DIMMING
SLG	<b>4012</b> 12 in	<b>22K</b> 2200K	<b>BX</b> 10° X 10°	<b>120V</b> 120V	<b>ELV</b> Electronic/ TRIAC
	<b>4048</b> 48 in	<b>25K</b> 2500K	<b>BV</b> 10° X 60°		
		<b>27K</b> 2700K	<b>BG</b> 30° X 60°		
		<b>*30K</b> 3000K			
		<b>35K</b> 3500K			
		<b>40K</b> 4000K			
		<b>50K</b> 5000K			
		*Quick ship			

# SLG-4000

## HIGH POWER INTERIOR LINEAR COVE

### DIMENSIONS

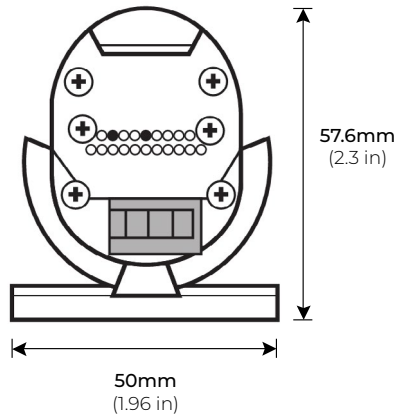

### LUMENS

MODEL	CCT	Lumen/ FT	EFFICACY (lm/W)
SLG-4000	2200K	993	84.6
	2400K	1004	84.8
	2700K	1015	85.3
	3000K	1026	86.2
	3500K	1038	87.2
	4000K	1045	87.8
	5000K	1056	88.3

### COMPATIBLE ACCESSORIES

**SLG-LNK-12**  
12" LINK CABLE

\* SOLD SEPARATELY

**SLG-LNK-60**  
60" LINK CABLE

\* SOLD SEPARATELY



**SLG-HWC-120**  
120" HARDWIRE CABLE

\* SOLD SEPARATELY

\*1 CABLE PER RUN REQUIRED. (48FT. MAX RUN)

