

# ULR SERIES

## 120V SWITCHABLE CCT UNDERCABINET LED FIXTURE

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

Featuring a Switchable-CCT switching option, the **ULR Series** makes it easy to seamlessly change color temperatures with the flick of a switch. Change from 27K/30K/35K color temperatures instantly within the same fixture. Easy to use and install, the ULR Series undercabinet LED fixture mounts directly onto the surface. With a variety of lengths, colors and options available, the ULR Series is perfect for most lighting project requirements.



### SPECIFICATIONS

INPUT VOLTAGE	120V/ 60 Hz
POWER CONSUMPTION	6W- 18W per Ft.
LUMEN OUTPUT	350 - 1250 Lumens per Ft.
CRI	90+
COLOR TEMPERATURE	27K/ 30K/ 35K
MAXIMUM RUN LENGTH	Up to 300W
DIMMING	TRIAC
OPERATING TEMPERATURE	40°F (-40°C) to +140°F (+60°C)
BEAM ANGLE	110°
IP RATING	IP45
FINISH	White
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs.
DIMENSIONS	89 x 25.4mm (3.5 x 1") (WxH)

### FEATURES

- 6W - 18W
- Up to 1250 Lumens
- 11 in - 42 in length options
- 90+ CRI
- Switchable CCT
- Suitable for accent or ambient lighting
- Superior Color Rendering Index (CRI)
- TRIAC dimming
- Instant-on to full brightness
- Linkable
- UL Listed (US and Canada)

MODEL	ULR11	ULR14	ULR22	ULR28	ULR33	ULR42
LENGTH	11"	14"	22"	28"	33"	42"
WATTS	6W	8W	10W	12W	15W	18W




MODEL	LENGTH	COLOR TEMP	FINISH	VOLTAGE
ULR	11 11"	*27K 2700K	WH White	120V 120V AC
	14 14"	*30K 3000K		
	22 22"	*35K 3500K		
	28 28"			
	33 33"			
	42 42"	* Built in switchable CCTs in fixture		

# ULR SERIES


## 120V SWITCHABLE CCT UNDERCABINET LED FIXTURE

### DIMENSIONS


**ULR-11**  
6W | 11 INCHES

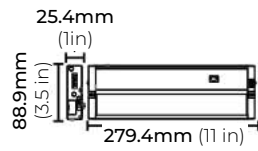

**ULR-14**  
8W | 14 INCHES

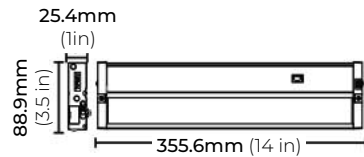


**ULR-22**  
10W | 22 INCHES

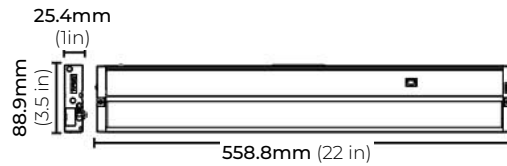


**ULR-28**  
12W | 28 INCHES



**ULR-33**  
15W | 33 INCHES

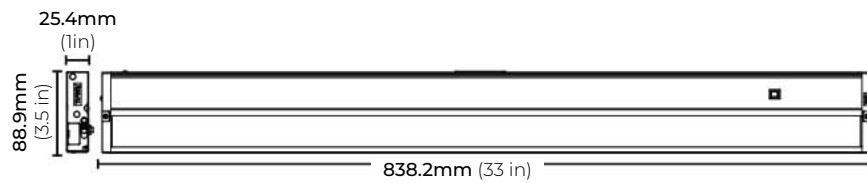






**ULR-42**  
18W | 42 INCHES

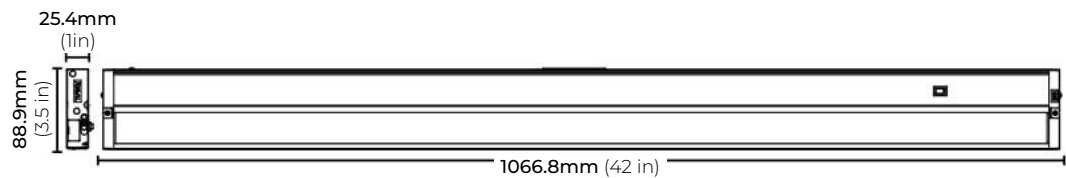

# ULR SERIES

## 120V SWITCHABLE CCT UNDERCABINET LED FIXTURE

### PHOTOMETRICS

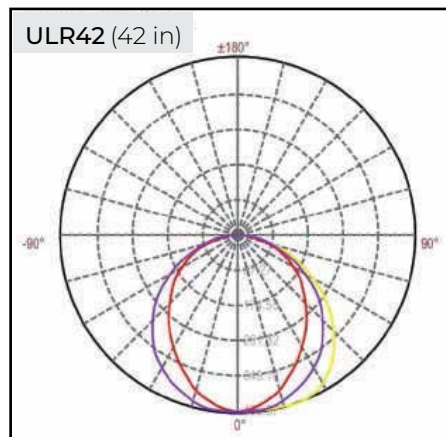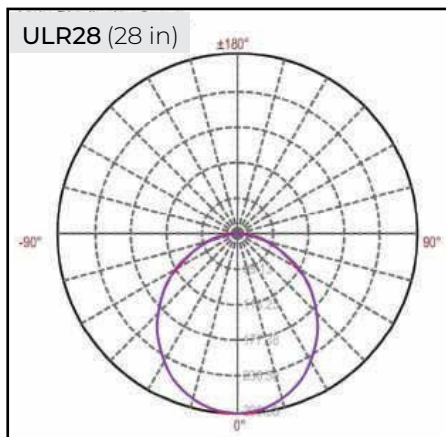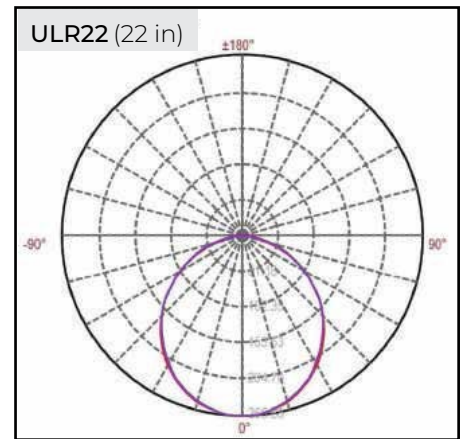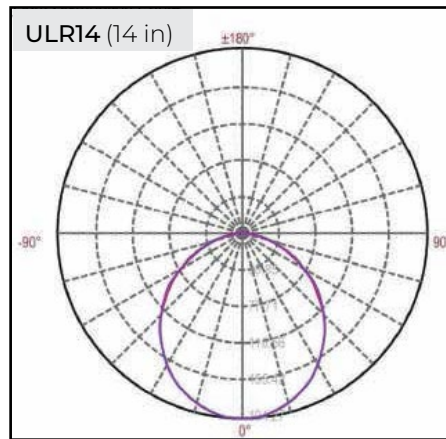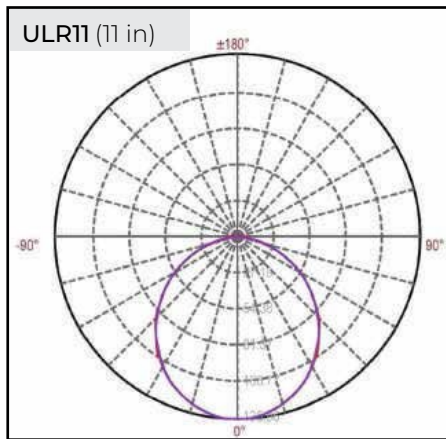

### COMPATIBLE ACCESSORIES

**ULR-LNK6-WH** (white)  
6" INTER LINK CABLE

**ULR-LNK12-WH** (white)  
12" INTER LINK CABLE

**ULR-LNK24-WH** (white)  
24" INTER LINK CABLE



**ULR-PCA-60-WH** (white)  
60" AC DIRECT PLUG IN POWER FEED CABLE

