

LSM-30

3W INDOOR FLEXIBLE LED STRIP

UPDATED: 07.31.26

Project _____

Location _____

Quote/ Ref # _____


LSM-30 is a dimmable flexible LED strip capable of delivering 223 lumens of light output per ft. Suitable for use in cove lighting, under cabinets, architectural and aesthetic enhancements. It features superior CRI and different color temperature options.



LSM-30

3W INDOOR FLEXIBLE LED STRIP

DIMENSIONS

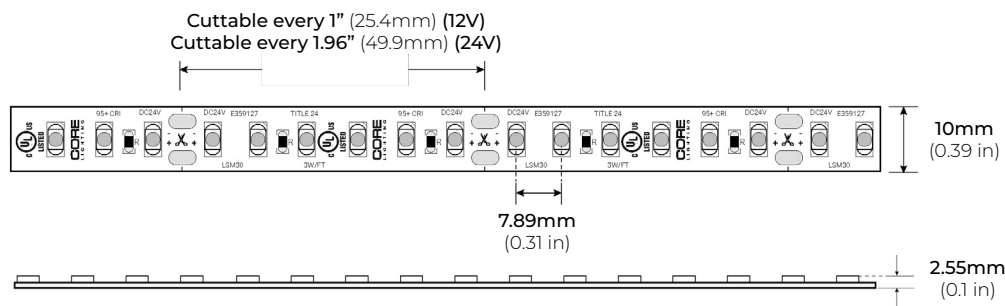


COMPATIBLE CONNECTORS

For more information about connector-profile compatibility, visit corelightingusa.com/tape-light-accessories.


HP PRO CONNECTORS

QUICK CONNECT SNAP-ON
(0.96" X 0.57" X 0.3")

LSA-HW8-HP 8" HARDWIRE CONNECTOR
LSA-HW24-HP 24" HARDWIRE CONNECTOR
LSA-HW60-HP 60" HARDWIRE CONNECTOR
LSA-HW120-HP 120" HARDWIRE CONNECTOR




LSA-EX3-HP 3" LINK
LSA-EX8-HP 8" LINK
LSA-EX24-HP 24" LINK



LSA-MC-HP MINI COUPLING



LSA-DC24-HP 24" DC CONNECTOR



LSA-TB

SOLDERLESS LED STRIP/ WIRE BLOCK CONNECTOR

LSA-TB-HWC-2A 2 AMP MAX HARDWIRE CONNECTOR
36W MAX (12V) | 72W MAX (24V)
(0.53" X 0.45" X 0.26")



LSA-TB-HWC-4A 4 AMP MAX HARDWIRE CONNECTOR
36W MAX (12V) | 72W MAX (24V)
(0.45" X 0.48" X 0.31")



LSA-TB-MC-4A 4 AMP MAX STRIP TO STRIP CONNECTOR
36W MAX (12V) | 72W MAX (24V)
(0.45" X 0.48" X 0.31")




MALE/ FEMALE LINK CONNECTORS

HARDWIRE LINK CONNECTOR
100W (MAX POWER) | 4.5A (MAX RATING)

*SOLD SEPARATELY

CON6 6" HARDWIRE LINK CONNECTOR

CON24 24" HARDWIRE LINK CONNECTOR

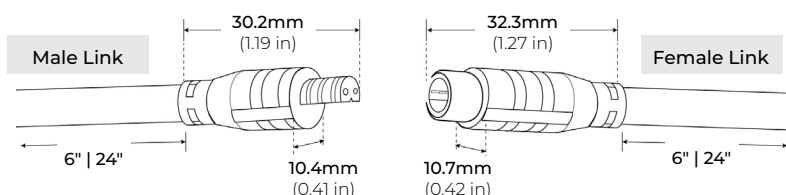

LSM-30


3W INDOOR FLEXIBLE LED STRIP

COMPATIBLE ALUMINUM PROFILES

SURFACE PROFILES


ALU-SF

LENGTHS 39" | 78" | 84" | 98"
LENS Clear, Frosted
FINISH Black | Silver

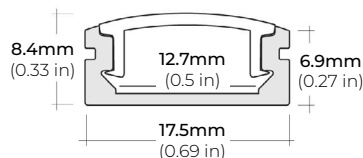


ALU-CN (CORNER)

LENGTHS 39" | 78" | 84" | 96"
LENS Clear, Frosted
FINISH Black | Silver




ALU-DS100

LENGTHS 39" | 78" | 84"
LENS Clear, Frosted
FINISH Silver




ALP-20

LENGTHS 49" | 84" | 98"
LENS Frosted
FINISH White | Black | Silver




ALP-35

LENGTHS 49" | 98"
LENS Frosted
FINISH White | Black | Silver




ALP-50C-V2 (CORNER)

LENGTHS 48" | 84" | 98"
LENS Frosted
FINISH White | Black | Silver




ALP-60

LENGTHS 49" | 84" | 98"
LENS Frosted
FINISH White | Black | Silver




ALP-65

LENGTHS 48" | 96"
LENS Clear
FINISH Silver




ALP-70

LENGTHS 49" | 84" | 98"
LENS Frosted
FINISH White | Black | Silver



ALP-80

LENGTHS 49" | 98"
LENS Frosted
FINISH Silver




* For more compatible profiles, visit corelightingusa.com

RECESSED PROFILES


ALP-20R

LENGTHS 49" | 98"
LENS Frosted
FINISH White | Black | Silver

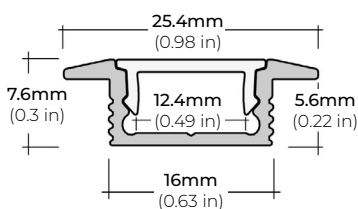

ALP-60R

LENGTHS 49" | 84" | 98"
LENS Frosted
FINISH White | Black | Silver

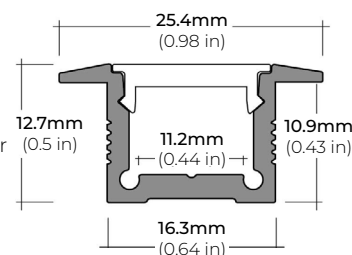

* For more compatible profiles, visit corelightingusa.com

LSM-30

3W INDOOR FLEXIBLE LED STRIP


COMPATIBLE TRANSFORMERS

PSDL SERIES

TRIAC DIMMABLE

PSDL-30W-12V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-12V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-100W-12V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-12V		10.25" X 4.06" X 1.82"
PSDL-200W-12V		10.25" X 4.06" X 1.82"
PSDL-300W-12V		10.25" X 4.06" X 1.82"


PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		10.25" X 4.06" X 1.82"
PSDL-192W-24V	CLASS 2	11" X 4" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

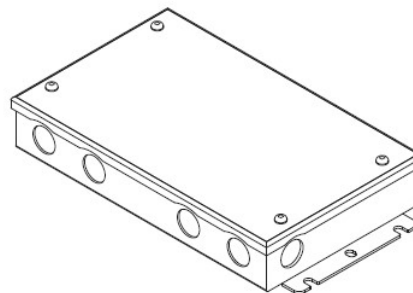

PSDH SERIES

HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)


PSDH-48W-24V	CLASS 2	11.25" X 3.38" X 3.38"
PSDH-96W-24V	CLASS 2	11.25" X 3.38" X 3.37"



PSRX SERIES

4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-30W-12V-UNV	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-12V-UNV	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-150W-12V-UNV		10.24" X 4.13" X 1.77"
PSRX-30W-24V-UNV	CLASS 2	6.5" X 3.7" X 1.57"
PSRX-60W-24V-UNV	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V-UNV	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-200W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-300W-24V-UNV		10.94" X 4.33" X 1.77"

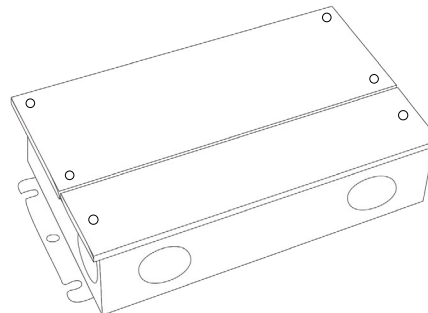

LSM-30


3W INDOOR FLEXIBLE LED STRIP

COMPATIBLE TRANSFORMERS

PSVT SERIES

0-10V DIMMING WITH JUNCTION BOX


PSVT-60W-24V-UNV-010	CLASS 2	7.4" X 3.72" X 1.57"
PSVT-96W-24V-UNV-010	CLASS 2	8.66" X 3.72" X 1.57"
PSVT-200W-24V-UNV-010		10.24" X 4.13" X 1.77"
PSVT-288W-24V-UNV-010	CLASS 2	11.85" X 4.25" X 1.81"
PSVT-300W-24V-UNV-010		10.94" X 4.33" X 1.77"

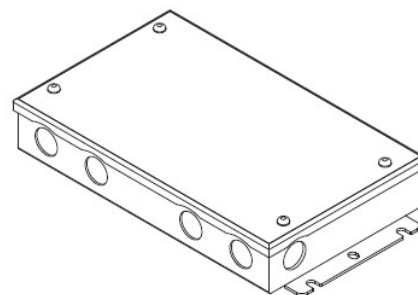

PSDE SERIES

0-10V DIMMING W/ JUNCTION BOX


PSDE-60W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"
PSDE-96W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"

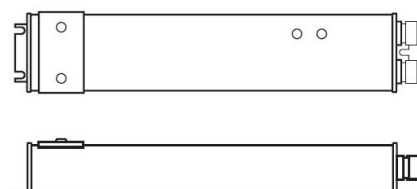

LUTRON 1%


3-WIRE DIMMING

L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
------------------	---------	--------------------

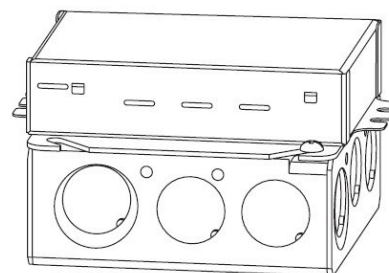

LUTRON 1%

PSDE-96W-24V-ECO	CLASS 2	10.5" X 3.0" X 2.0"
------------------	---------	---------------------



LSM-30

3W INDOOR FLEXIBLE LED STRIP

UPDATED: 07.31.26

COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.94" X 4.25" X 1.81"

