


INSTALLATION GUIDE

DIMENSIONS

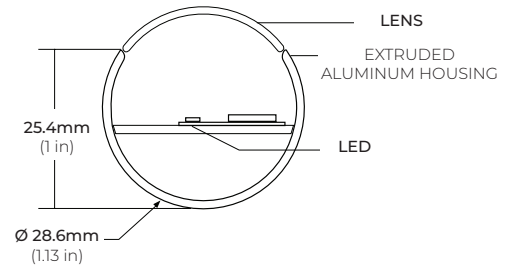

PRE-INSTALLATION

Suspended Mount

Power input is 24V DC. Confirm the power supply is compatible.

Disconnect power source prior to installation.

SAFETY

Read all instructions before installation.

These products may represent a possible shock or fire hazard if improperly installed.

Do not look directly into light.



Product should be installed by a qualified electrician.







Product should be installed in accordance with these instructions and current electrical codes.



Must be installed with CORE Lighting Drivers

INSTALLATION

- | | |
|--------|--|
| STEP 1 | Using a pencil, mark the ceiling to map out the placement of the fixture. |
| STEP 2 | Cut a Ø 25mm (1") hole in the ceiling and feed the main power wires through the hole. |
| STEP 3 | Feed the aircraft cable through the griplock gripper by rotating clockwise to loosen. Continue to feed the wire through until the desired length and rotate counter-clockwise to secure the cable in place. (Figure 1) |
| STEP 4 | Connect the powerfeed to the main power wire. (Figure 2) |
| STEP 5 | Using screws, secure the canopy mounting to the ceiling. (Figure 3)
*If necessary, adjust the cable length by repeating step 3. |
| STEP 6 | Slide the cover plate up the suspension cable towards the ceiling and secure in place using set screws along the sides. (Figure 4) |

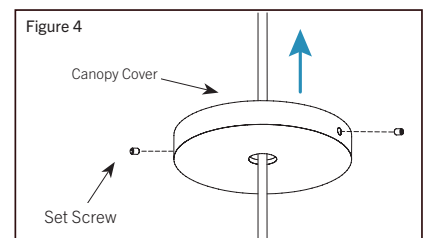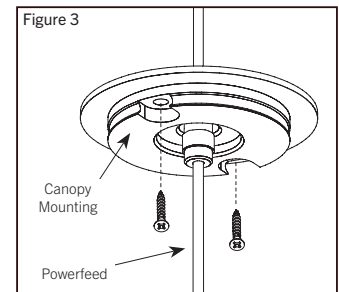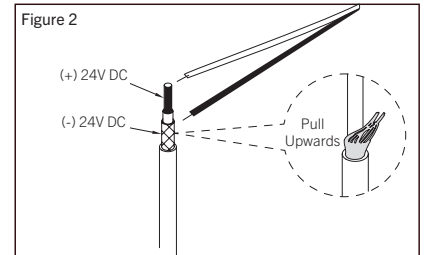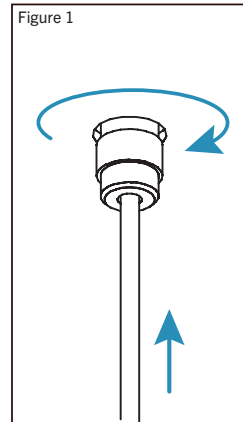

INSTALLATION (CONT.)

- If only installing one fixture, skip to step 8.
- STEP 7** Joining Multiple Fixtures
If connecting multiple fixtures together, screw the light fixture into your connector of choice. Secure in place with set screws. Repeat on the opposite side. (Figure 5)
- *The LUCA fixture can be linked together up to 20ft. with non-powered connectors. Factory recommends one powered connector every 20ft. See spec sheet for compatible connectors.*
- STEP 8** Connect the end support to the end of the fixture. Secure in place with set screws. (Figure 6)
- STEP 9** Mount the cable fitting to the ceiling using anchor screws and rotate the cover clockwise to secure the suspension cable in place. (Figure 7)
- STEP 10** Adjust the height of the luminaire by pressing the gripper nozzle. Pull the cable to the desired length and cut any excess cable with appropriate tools. (Figure 8)
- STEP 11** Turn on power to test luminaire functionality.

