

LWW-SL-RGBW

HIGH-OUTPUT MINI RGB/RGBW LED WALL WASHER

Project _____

Location _____

Quote/ Ref # _____

The **LWW-SL-RGBW** Mini LED Wall Washer is a high-performance low voltage luminaire designed for outdoor facade lighting. It is available in 500mm and 1000mm. It features color-changing ability with high radiance for an optimal color scheme. The multiple optic designs and anti-glare louver making this luminaire extremely versatile in supporting to a variety of architecture applications.



SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	18W (20") 36W (40")
CRI	90+
COLOR TEMPERATURE	RGB30K / RGB40K / RGB65K
DIMMING	DMX
MAX RUN	Linkable up to 6 fixtures (assorted)
OPERATING TEMPERATURE	14°F (-10°C) - 122°F (50°C)
STORAGE TEMPERATURE	-22°F (-30°C) - 140°F (60°C)
BEAM ANGLE	15° / 25° / 35° / 50° / 20°x50°
IP RATING	IP66 wet location (outdoor)
LUMEN MAINTENANCE	50,000 hrs.

FEATURES

- 360 lumens per foot
- Linkable up to 6 fixtures (assorted lengths)
- Proprietary Optical Technology
- DMX Ready
- Proprietary Adjustable Mounting Bracket
- Facade Wall Washing
- Graze Lighting
- Signage




MODEL	LENGTH	COLOR TEMP	OPTICS	OPTIONS	FINISH	VOLTAGE
LWWSL	20 20" (18W)	RGB30K RGB3000K	15 15°	STB Standard Tilting Bracket	TG Titanium Grey	24 24V DC
	40 40" (36W)	RGB40K RGB4000K	25 25°	ETB Extended Tilting Bracket	*BK Black	
		RGB65K RGB6500K	35 35°	LTB L-Shape Bracket	*WH White	
			50 50°			
			20x50 20° x 50°	WMS Small Wall Mount Arms		
				WML Large Wall Mount Arms		
				STK Mounting Stake		
					* Special order item- allow up to 4 weeks of lead time	


LWW-SL-RGBW

HIGH-OUTPUT MINI RGB/RGBW LED WALL WASHER

DIMENSIONS

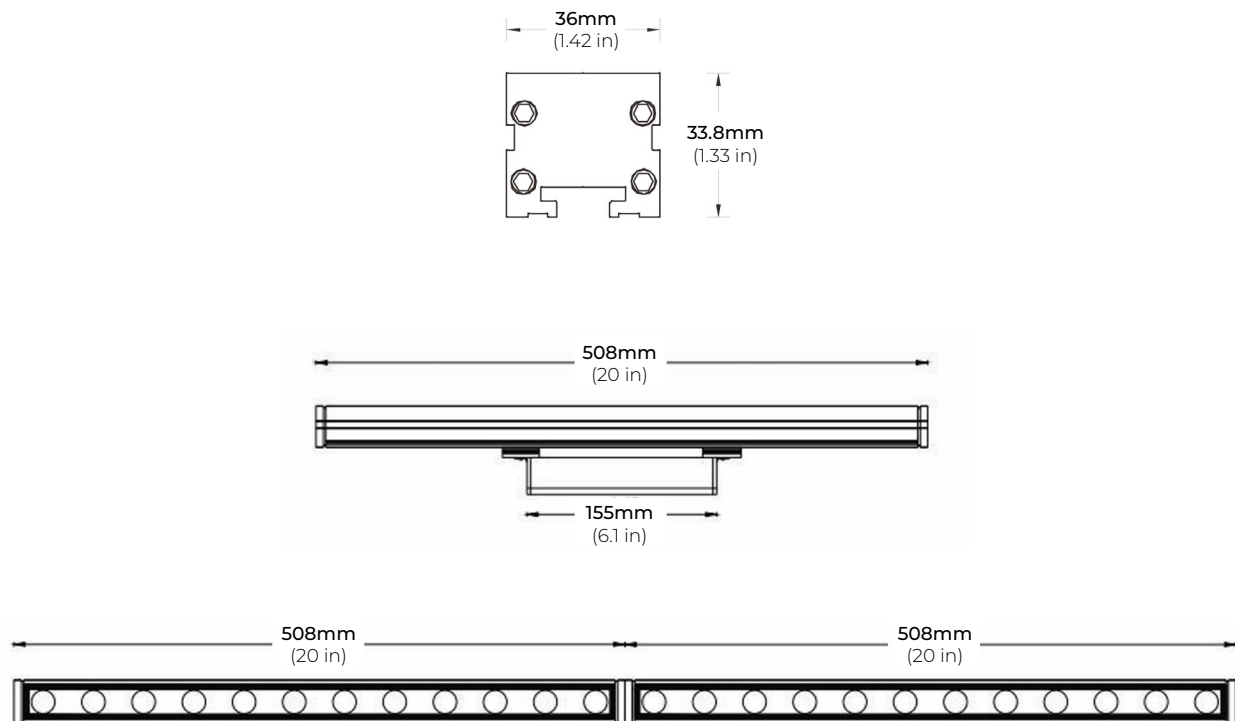

OPTICS

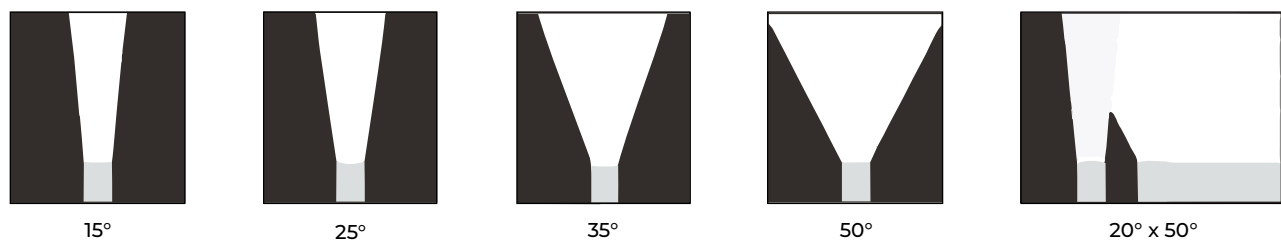

LWW-SL-RGBW


HIGH-OUTPUT MINI RGB/RGBW LED WALL WASHER

MOUNTING ACCESSORIES

LWW-SL-STB

STANDARD TILTING BRACKET


*Included with every Fixture



LWW-SL-ETB

EXTENDED TILTING BRACKET


*Sold Separately



LWW-LTB

L-SHAPED BRACKET

*Sold Separately



LWW-WMS


SMALL WALL MOUNT ARM (6-9")

*Sold Separately



Adjustable Length Wall to Fixture


Small Mounting Arm: 6-9 in.
Large Mounting Arm: 14-22 in.

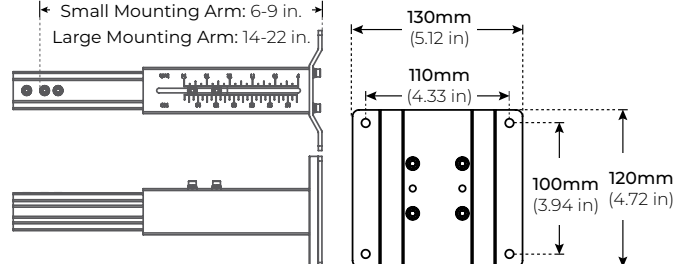

LWW-WML


LARGE WALL MOUNT ARM (14-22")

*Sold Separately



LWW-SL-STK

MOUNTING STAKE

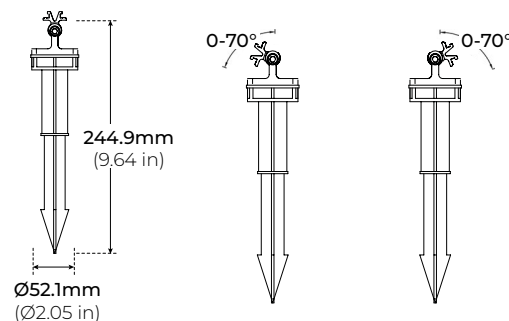

LWW-SL-RGBW

CORE
ARCHITECTURAL
LIGHTING

UPDATED: 06.10.26

HIGH-OUTPUT MINI RGB/RGBW LED WALL WASHER


COMPATIBLE ACCESSORIES

LWW-EC

END CAP

*Sold Separately

*One end cap required per run length

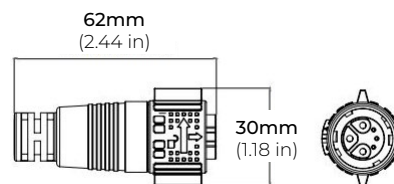

LWW-SL-12-ADLV



LWW-SL-24-ADLV

LWW-SL-36-ADLV

LWW-SL-48-ADLV

12", 24", 36", 48" ASYMMETRIC LOUVER

*Sold Separately



LWW-SL-12-SDLV



LWW-SL-24-SDLV

LWW-SL-36-SDLV

LWW-SL-48-SDLV

12", 24", 36", 48" SYMMETRIC LOUVER

*Sold Separately



LWW-LNK-10

LWW-LNK-36

LWW-LNK-72

10", 36", 72" LINK EXTENSION CABLE

*Sold Separately



LWW-HWC-72-BK

72" HARDWIRE CABLE

*Sold Separately



LWW-SL-RGBW


HIGH-OUTPUT MINI RGB/RGBW LED WALL WASHER

DMX CONTROLLERS

RGB CT600

MULTI-FUNCTION RGBW WALL CONTROLLER


INPUT VOLTAGE	5V DC, 1A
OUTPUT SIGNAL	RF 2.4GHZ + DMX512
CONTROL	4 ZONES
COLOR OPTIONS	Black/ White
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.19"x7.08"x1.38")



RGB-SDE3

WiFi DMX WALL CONTROLLER

INPUT VOLTAGE	6V DC, 0.6A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC/ Tablet/ Smartphone
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ Ethernet/ RS232/ CLock/ 8dry contact ports/ 5V output relay
MEMORY	MicroSD Card
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



LWW-SL-RGBW

HIGH-OUTPUT MINI RGB/RGBW LED WALL WASHER

COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

